KLIMAS Sp. z o.o. ul. W. Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów
tel. +48 34 377 71 00, fax. +48 34 328 01 73 Infolinia: 801 477 477, www.wkret-met.com

PRODUCT DATA SHEET – WPCV-R/WPCV

Section 1. PRODUCT DESCRIPTION

SCREW WITH/WITHOUT RIBS FOR FITTINGS – WPCV-R/WPCV

Screws WPCV-R/WPCV for fixing steel fittings to PVC profiles. They are made of zinc plated carbon steel. Zinc plating ensures high corrosion protection which is not subject to damage when in use. Screws have countersunk head with PH drive which ensures flush fitting of the screw in the installed member and special thread and sharp point which makes installation significantly faster and easier. Screws WPCV-R have special ribs under the head which prevent their turning when in use. Screws require no pre-drilling in PVC profiles.

Advantages:


- **high corrosion protection – zinc plating**
- **PH drive with marking – exact size and good workmanship make it ideal for use with automatic screwdriving units**
- **countersunk head – ensures flush fitting of the screw in the installed member**
- **special ribs (WPCV-R) – prevent screw turning when in use**
- **correct thread pitch – ensures correct installation in PVC window frames**
- **sharp point – ensures easier and faster screw installation in place**

POLSKI PRODUCENT

Zn BIAŁY


Zn ŻÓŁTY

*made to order

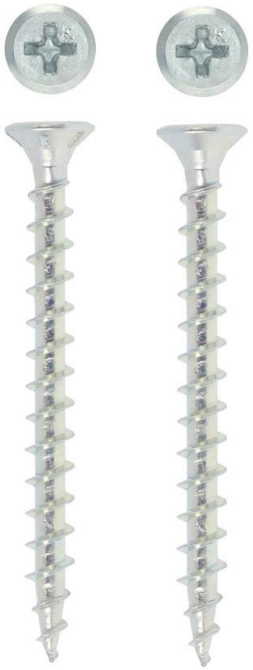


WPCV-R **WPCV**

Section 2. TECHNICAL DATA

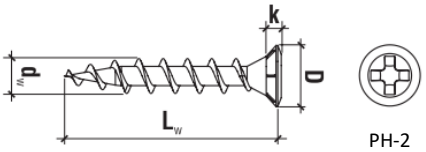


WPCV-R

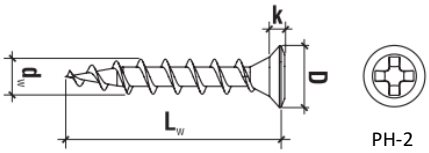

WPCV

TECHNICAL PARAMETERS		
Parameter	Unit	Value
Screw diameter	d_w [mm]	4,0
Head diameter	D [mm]	7,3
Head height	k [mm]	2,4
Drive type	-	PH-2
Screw material	-	carbon steel
Corrosion	galvanized	blue/yellow*

*on request and to order

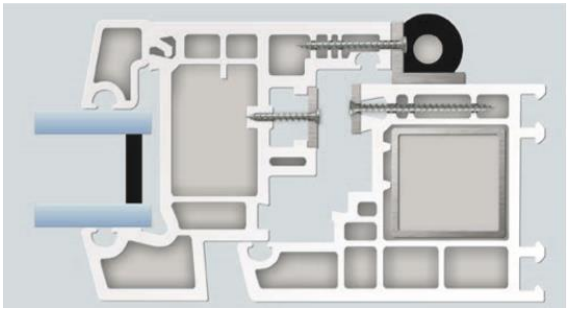

SELECTION TABLE			
Product designation		Screw dimensions	Number of pieces in a box
		d_w x L_w [mm]	[pcs]
WPCV-R-B-40016	WPCV-B-40016*	4,0 x 16	1000
WPCV-R-B-40020	WPCV-B-40020*	4,0 x 20	1000
WPCV-R-B-40025	WPCV-B-40025*	4,0 x 25	1000
WPCV-R-B-40030	WPCV-B-40030*	4,0 x 30	1000
WPCV-R-B-40035	WPCV-B-40035*	4,0 x 35	500
WPCV-R-B-40040	WPCV-B-40040*	4,0 x 40	500
WPCV-R-B-40045	WPCV-B-40045*	4,0 x 45	500
WPCV-R-B-40050	WPCV-B-40050*	4,0 x 50	500
WPCV-R-B-40055	WPCV-B-40055*	4,0 x 55	500

*on request and to order

All rights reserved The sheet may be disclosed only in the form as delivered. No part (contents such as text, graphics, logos, figures, pictures, and any other data) given in this document may be modified or published whatsoever in part, without prior authorisation. Any trademarks, graphic symbols, trade names, logos and other data are protected by copyright and are property of their owner. Created: 2016-01-20 Updated: 2019-11-06

Section 3. REMARKS

1. All previous versions of this Product Data Sheet shall cease to be valid
2. Data given in this Product Data Sheet is in accordance with current knowledge and published in good faith. KLIMAS Sp. z o.o. is not responsible for correctness and quality of the fixing if recommendations regarding method of use and installation are not followed.

All rights reserved The sheet may be disclosed only in the form as delivered. No part (contents such as text, graphics, logos, figures, pictures, and any other data) given in this document may be modified or published whatsoever in part, without prior authorisation. Any trademarks, graphic symbols, trade names, logos and other data are protected by copyright and are property of their owner. Created: 2016-01-20 Updated: 2019-11-06