KLIMAS Sp. z o.o.
ul. Wincentego Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów
tel. +48 34 3777 100, fax +48 34 328 01 73

CE 16

DECLARATION OF PERFORMANCE No 26/SZ/16

1. Unique identification code of the product-type: **WB6P, WB6Px, WB6P-D, A2-WB6P**
2. Intended use/es: **Fastening screws for metal members and sheeting**
3. Manufacturer: **KLIMAS Sp. z o.o.**
   ul. Wincentego Witosa 135/137
   Kuźnica Kiedrzyńska 42-233 Mykanów
4. Authorised representative: **not applicable**
5. System/s of AVCP: **system 2+**
6. European Assessment Document:
   a) **European Assessment Document (EAD) 330046-01-0602 „Fastening screws for metal members and sheeting"**
   b) **European Technical Assessments – ETA-16/0443 of 30/06/2016**
   c) **Instytut Techniki Budowlanej**
   d) **Identification number of notified body- 1488**
7. Declared performance/s:


Self-drilling screws with hexagon head and sealing washer WB6P-6,3 x L, WB6Px-6,3 x L, WB6P-D-6,3 x L

Material

Fastener:	carbon steel – SAE1022 or 19MnB4 quenched, tempered and galvanized
Washer:	EPDM sealing ring with metal top made of aluminium, coated carbon steel or stainless steel
Component I:	S280GD, S320GD or S350GD – EN 10346
Component II:	structural timber – EN 14081

Drilling capacity: -

Timber substructures
For timber substructures performance assessed with
$M_{y,Rk}$ = 8,91 Nm
$f_{ax,k}$ = 16,586 N/mm² for $l_{ef} \geq 30$ mm

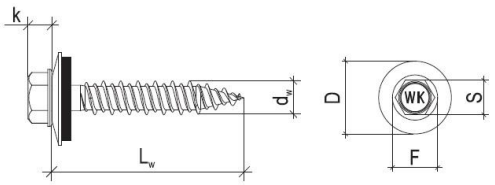

d_w = 6,3 mm
L_w = 19-90 mm
s = 10 mm
k = 5,3 mm

Characteristic resistance of shear and pull-out load

$t_{N,II}$ [mm]	0,50	0,55	0,63	0,75	0,88	1,00	1,25	1,50	Wood class ≥ C24		
$M_{t,nom}$	3 Nm								20 mm	30 mm	
Resistance of shear load $V_{R,k}$ [kN] for $t_{N,I}$ [mm] 0,50	—	—	—	—	—	—	—	—	—	1,35*	*bearing resistance of component I
0,55	—	—	—	—	—	—	—	—	—	1,35*	
0,63	—	—	—	—	—	—	—	—	—	1,70*	
0,75	—	—	—	—	—	—	—	—	—	2,10*	
0,88	—	—	—	—	—	—	—	—	—	2,10*	
1,00	—	—	—	—	—	—	—	—	—	2,10*	
1,13	—	—	—	—	—	—	—	—	—	2,10*	
1,25	—	—	—	—	—	—	—	—	—	2,10*	
1,50	—	—	—	—	—	—	—	—	—	2,10*	
1,75	—	—	—	—	—	—	—	—	—	2,10*	
2,00	—	—	—	—	—	—	—	—	—	2,10*	

KLIMAS Sp. z o.o.
ul. Wincentego Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów
tel. +48 34 3777 100, fax +48 34 328 01 73

CE 16

DECLARATION OF PERFORMANCE No 26/SZ/16

Resistance of pull-out load $N_{R,k}$ [kN] for $t_{N,I}$ [mm]												
0,50	—	—	—	—	—	—	—	—	—	3,13*	*bearing resistance of component II
0,55	—	—	—	—	—	—	—	—	—	3,13*	
0,63	—	—	—	—	—	—	—	—	—	3,13*	
0,75	—	—	—	—	—	—	—	—	—	3,13*	
0,88	—	—	—	—	—	—	—	—	—	3,13*	
1,00	—	—	—	—	—	—	—	—	—	3,13*	
1,13	—	—	—	—	—	—	—	—	—	3,13*	
1,25	—	—	—	—	—	—	—	—	—	3,13*	
1,50	—	—	—	—	—	—	—	—	—	3,13*	
1,75	—	—	—	—	—	—	—	—	—	3,13*	
2,00	—	—	—	—	—	—	—	—	—	3,13*	

Self-drilling screws with hexagon head and sealing washer A2-WB6P-6,3 x L

Material
Fastener: stainless steel – SAE 304 bi-metal


Washer: EPDM sealing ring with metal top
made of aluminium or stainless steel

Component I: S280GD, S320GD or S350GD – EN 10346

Component II: structural timber – EN 14081

Drilling capacity: -

Timber substructures
For timber substructures performance assessed with
$M_{y,Rk}$ = 6,83 Nm
$f_{ax,k}$ = 16,586 N/mm² for $l_{ef} \geq 30$ mm

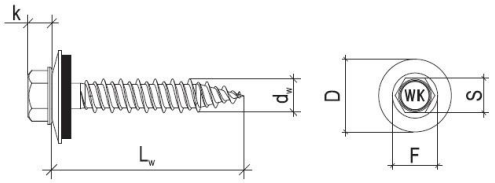

d_w = 6,3 mm
L_w = 19-90 mm
s = 10 mm
k = 5,3 mm

Characteristic resistance of shear and pull-out load

$t_{N,II}$ [mm]	0,50	0,55	0,63	0,75	0,88	1,00	1,25	1,50	Wood class ≥ C24		
$M_{t,nom}$	3 Nm								20 mm	30 mm	
Resistance of shear load $V_{R,k}$ [kN] for $t_{N,I}$ [mm]											
0,50	—	—	—	—	—	—	—	—	—	1,35*	*bearing resistance of component I
0,55	—	—	—	—	—	—	—	—	—	1,35*	
0,63	—	—	—	—	—	—	—	—	—	1,70*	
0,75	—	—	—	—	—	—	—	—	—	2,10*	
0,88	—	—	—	—	—	—	—	—	—	2,10*	
1,00	—	—	—	—	—	—	—	—	—	2,10*	
1,13	—	—	—	—	—	—	—	—	—	2,10*	
1,25	—	—	—	—	—	—	—	—	—	2,10*	
1,50	—	—	—	—	—	—	—	—	—	2,10*	
1,75	—	—	—	—	—	—	—	—	—	2,10*	
2,00	—	—	—	—	—	—	—	—	—	2,10*	

KLIMAS Sp. z o.o.
ul. Wincentego Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów
tel. +48 34 3777 100, fax +48 34 328 01 73

CE 16

DECLARATION OF PERFORMANCE No 26/SZ/16

Resistance of pull-out load $N_{R,k}$ [kN] for $t_{N,i}$ [mm]												
	0,50	—	—	—	—	—	—	—	—	—	3,13*	*bearing resistance of component II
	0,55	—	—	—	—	—	—	—	—	—	3,13*	
	0,63	—	—	—	—	—	—	—	—	—	3,13*	
	0,75	—	—	—	—	—	—	—	—	—	3,13*	
	0,88	—	—	—	—	—	—	—	—	—	3,13*	
	1,00	—	—	—	—	—	—	—	—	—	3,13*	
	1,13	—	—	—	—	—	—	—	—	—	3,13*	
	1,25	—	—	—	—	—	—	—	—	—	3,13*	
	1,50	—	—	—	—	—	—	—	—	—	3,13*	
	1,75	—	—	—	—	—	—	—	—	—	3,13*	
	2,00	—	—	—	—	—	—	—	—	—	3,13*	

8. Appropriate Technical Documentation and/or Specific Technical Documentation: **not applicable**

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Kuźnica Kiedrzyńska
24.08.2016r.
(place and date of issue)

Adam Szczepanowski
DORADCA TECHNICZNY
mgr inż. Adam Szczepanowski
- 333 -

(signature)