Technický a zkušební ústav stavební Praha, s.p.
Prosecká 811/76a
190 00 Prague
Czech Republic
T: +420 286 019 400
W: www.tzus.cz

Designated according to Article 29 of Regulation (EU) No 305/2011

Member of EOTA
www.eota.eu

European Technical Assessment

ETA 14/0425
of 28/04/2020

General Part

Technical Assessment Body issuing the European Technical Assessment Technický a zkušební ústav stavební Praha, s.p.	
Trade name of the construction product	DMX®
Product family to which the construction product belongs	Product area: 13 Three-Dimensional Nailing Plates
Manufacturer	DOMAX Sp.z o.o. Aleja Parku Krajobrazowego 109 84-207 Koleczkowo Łężyce Republic of Poland
Manufacturing plant	DOMAX Sp.z o.o. Aleja Parku Krajobrazowego 109 84-207 Koleczkowo Łężyce Republic of Poland
This European Technical Assessment contains	65 pages including 6 annexes, which form an integral part of this European Technical Assessment
This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of	ETAG 015 used as European Assessment Document (EAD)
This version replaces	ETA 14/0425, version 01, issued on 13/11/2014

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body - Technical and Test Institute for Construction Prague. Any partial reproduction has to be identified as such.

1 Technical description of the product

The three-dimensional nailing plates DMX® are one-piece, non-welded or welded (KKB, PS, SDP 90 A, SDP 90 B, SDP 100 A, SDP 100 B, SDP 120 A, SDP 120 B, SDSP 70 A, SDSP 70 B) elements, made of the cold-formed steel sheet grade DX51D according to EN 10346 with the zinc coating mass of 275 g/m^2, electrogalvanized steel DC01 according to EN 10131 with corrosion protection Fe/Zn 12 or S235 according to EN 10025-2 with minimum 12 μm of zinc layer. Elements SD and SDS have extra powder coating 60 μm (see list below). The three-dimensional nailing plates DMX® correspond to the drawings and dimensions given in Annex 1.

Technical description of the product

Type of Domax connector	Made of	Kind of corrosion protection
KLR	DX51D	Z275
KP	DX51D	Z275
KPK	DX51D	Z275
KPL	DX51D	Z275
KR	KR 1 – DC01 KR 2 – DX51D KR 3 – DX51D	Fe/Zn 12 Z275 Z275
KRD	DX51D	Z275
LU	DX51D	Z275
WBC	DX51D	Z275
WBU	DX51D	Z275
ŁB	S235	Fe/Zn 12
NT	DX51D	Z275
KKB	S235	Fe/Zn 12
PS	S235 / B500	Fe/Zn 12
KPS	DX51D	Z275
SD	SDLZ 1 – DX51D SDKLR 1 – DX51D SDKL 1 – DX51D SDP 90 A – S235 SDP 90 B – S235 SDP 100 A – S235 SDP 100 B – S235 SDP 120 A – S235 SDP 120 B – S235 SDD 85 A – DX51D SDD 85 B – DX51D	Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm
SDS	SDSP 70 A – S235 SDSP 70 B – S235 SDSKW 2 – DX51D SDSKW 8 – DX51D SDSKP 1 – DX51D SDSKP 5 – DX51D SDSKM 7 – DX51D SDSWBZ 10 – DX51D SDSWBZ 11 – DX51D SDSWBZ 14 – DX51D SDSWBZ 21 – DX51D SDSWBZ 26 – DX51D SDSWBZ 30 – DX51D	Fe/Zn 12 + Powder Coating 60 µm Fe/Zn 12 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm Z275 + Powder Coating 60 µm

1.1 Identification

The identification parameters and reference to product specifications for identifying the materials and components which constitute the three dimensional nailing plates are given in Annex 1.

2 Specification of the intended use(s) in accordance with the applicable European Assessment Document (hereinafter EAD)

The DMX® three-dimensional nailing plates are intended to be used in timber to timber connections as well as connections between a timber joist and a concrete structure or a steel member. For connecting the mutually perpendicular, load-bearing, solid timber elements, in side-grain to side-grain configurations, in joints for which requirements for mechanical resistance and stability in the sense of the basic requirement 1 of Regulation (EU) No 305/2011 shall be fulfilled.

Ring shank nails according to EN 14592 with the diameter of 4 mm and characteristic tensile capacity $F_{ax,Rk}$ not less than 1.80 kN shall be used for connections made with the DMX® three-dimensional nailing plates.

In respect of the requirements concerning corrosion resistance, DMX® three-dimensional nailing plates are for use in timber structures subjected to the internal conditions defined by service classes 1, 2 and 3 (connectors with additional powder coating) according to EN 1995-1-1 (Eurocode 5), in corrosion aggressiveness categories C1 and C2 according to EN ISO 12944-2, without action of acid gases or vapours.

The provisions made in this European Technical Approval are based on an assumed working life of the product of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer or approval body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

The assessment of the fitness of the DMX® three-dimensional nailing plates for the intended use has been made in compliance with the ETAG 015 "*Three-dimensional nailing plates*" used as European Assessment Document (EAD).

2.1 Installation of three-dimensional nailing plates

The fitness for use of the DMX® three-dimensional nailing plates can only be assumed if the following conditions of installation are met:

- installation is carried out by appropriately qualified personnel under the supervision of the person qualified for this work,
- the original three-dimensional nailing plates only are used, supplied by the manufacturer together with the appropriate ring shank nails defined in clause 2.2.2,
- three-dimensional nailing plates installation is in accordance with the manufacturer's installation guide,
- before placing the three-dimensional nailing plates, the characteristics of timber members (type, class and moisture content) in which the nailing plates are to be placed are checked to ensure that they are identical or better than the characteristics of timber members used in testing in which the characteristic load-carrying capacities were determined,
- timber member placed in three-dimensional nailing plate does not contain the wanes and the gap between the connected elements does not exceed 3 mm.

3 Performance of the product and references to the methods used for its assessment

The assessment of the fitness for use of the three dimensional nailing plates according to the basic work requirements (BWR) were carried out in compliance with ETAG 015.

The European Technical Assessment is issued for the three dimensional nailing plates on the basis of agreed data and information, deposited at Technický a zkušební ústav stavební Praha, s.p., which identifies three dimensional nailing plates that has been assessed and judged. Changes to the plates or production process which could result in this deposited data and information being incorrect should be notified to Technický a zkušební ústav stavební Praha, s.p. before the changes are introduced. Technický a zkušební ústav stavební Praha, s.p. will decide whether or not such changes affect the ETA and consequently the validity of the CE marking on the basis of the ETA and if so whether further assessment or alternations to the ETA shall be necessary.

Table 1 Essential characteristics of the product

	Essential characteristic	Performance
3.1 BWR 1: Mechanical resistance and stability		
3.1.1	Joint strength	See Annex 3
3.1.2	Joint stiffness	NPA
3.1.3	Joint ductility in cyclic testing	NPA
3.2 BWR 2: Safety in case of fire		
3.2.1	Reaction to fire	The steel elements are classified as class A1 of reaction to fire (non-combustible products) in accordance with EN 13501-1+A1 and to European Commission Decision 96/603/EC amended by European Commission Decision 2000/605/EC.
3.2.2	Resistance to fire	NPA
3.3 BWR 3: Hygiene, health and the environment		
3.3.1	Content, emission and/or release of dangerous substances	See 3.3.1
BWR 4: Safety and accessibility in use		
Not relevant		
BWR 5: Protection against noise		
Not relevant		
BWR 6: Energy economy and heat retention		
Not relevant		
BWR 7: Sustainable use of natural resources		
Not relevant		

3.1 Mechanical resistance and stability (BWR 1)

3.1.1 Joint strength

The characteristic load-carrying capacities of joints loaded according to static diagrams (shown in Annex 2), determined by tests carried out according to ETAG 015, clause 5.1.3, are given in Annex 3. The characteristic load-carrying capacities of joints for other load direction shall be calculated on the basis of EN 1995-1-1 (Eurocode 5) or according to national regulations. The design values shall be determined according to EN 1995-1-1 (Eurocode 5).

Following the requirements of ETAG 015 for the minimum number of specimens for determining the characteristic load-bearing capacities through testing the applicant provided the laboratory with 5 specimens of each test assembly distinguished by a connector type, configuration of the connection and static scheme (direction of force actions).

The modifications of standard procedures applied come from the requirements of ETAG 015. The procedure specified in standard ref. 6 is modified as required in EOTA TR 016 *Method of testing Three-Dimensional Nailing Plates* with examples, namely the procedure corresponding to the case "*Test specimens fulfil EN ISO 8970*", which as stated above was relevant in all cases.

As agreed in between the applicant and the laboratory the manufacture, conditioning and transportation of the test assemblies into the laboratory was carried out by the applicant under specified conditions.

The conditions were as follows:
The timber members used – sawn timber blanks of European whitewood, grade C24, free from major defects in the area of the connector. Selection of timber members within a test group (the five specimens) referring to densities should comply with the requirements of EN ISO 8970. During testing of connectors at Technický a zkušební ústav stavební Praha, s.p. were used a timber specimens with characteristic density 350 kg/m^3.
The samples came in four successive deliveries in condition "fit for direct testing" meaning that conditioning the timber elements to equilibrium moisture content in line with the requirements of Cl. 2.4.1.1.3.3. ETAG 015 was carried out by the applicant. The completed and conditioned test assemblies were delivered protected by a plastic wrap.

Conditioning in the laboratory consisted in equalisation of temperatures of the specimens and the ambient temperature by storing in the laboratory for 3 days as a minimum, during which time the specimens remained wrapped in plastic cover. In the majority of cases the term of storing was much longer.

Dimensions of the timber members, relative moisture content and weight of the assemblies were determined for control whether the density of timber blanks complies with the requirements of EN ISO 8970. This was carried out with specimens unwrapped just before the load testing of each specimen. It is stated that in the majority of cases the requirement of the standard have been met. In several cases when the mean wood density was above the scope stated by the standard, allowance was made in line with the respective provision of EOTA TR 016.

3.1.2 Joint stiffness

No performance assessed.

3.1.3 Joint ductility in cyclic testing

No performance assessed.

3.2 Safety in case of fire (BWR 2)

3.2.1 Reaction to fire

The steel elements are classified as class A1 of reaction to fire (non-combustible products) in accordance with EN 13501-1+A1 and to European Commission Decision 96/603/EC amended by European Commission Decision 2000/605/EC.

3.2.2 Resistance to fire

Performance in relation to fire resistance would be determined for the complete structural element with any associated finishes, therefore there is no performance assessed option used to this Basic Work Requirement.

3.3 Hygiene, health and the environment (BWR 3)

3.3.1 Content, emission and/or release of dangerous substances

The manufacturer submit a written declaration whether or not and in which concentrations the three dimensional nailing plates contain substances which are classified as dangerous according to Directive 67/548/EEC and European Commission Regulation No 1272/2008.
In addition to the specific clauses relating to dangerous substances, there may be other requirements applicable to the products falling within their scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

3.4 Safety and accessibility in use (BWR 4)

Not relevant.

3.5 Protection against noise (BWR 5)

Not relevant.

3.6 Energy economy and heat retention (BWR 6)

Not relevant.

3.7 Sustainable use of natural resources (BWR 7)

For the sustainable use of natural resources no performance was assessed for this product.

3.8 Aspects of durability, serviceability and identification

3.8.1 Durability and serviceability

The DMX® three-dimensional nailing plates have been assessed as having satisfactory durability and serviceability when used in conditions defined by service classes 1 and 2 according to EN 1995-1-1 (Eurocode 5).

3.8.2 Identification

Each three-dimensional nailing plate is to be marked with the symbol and the product type designation according to the Annex 1.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base

According to the decision 1997/638/EC[1], of the European Commission the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011 and Commission delegated Regulation (EU) No 568/2014) given in the following table applies:

Product(s)	Intended use(s)	Level(s) or class(es)	Attestation of conformity system(s)
Shear plates, toothed-plate connectors, punched nail plates, nailing plates	For structural timber products		2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Issued in Prague on 28.04.2020

By
Mária Schaan
Head of the TAB

Annexes:

Annex 1	Product details and definitions
Annex 2	Loading and calculations according to static diagrams
Annex 3	The characteristic load carrying capacities of connectors
Annex 4	Nailing patterns
Annex 5	Specification of connection elements
Annex 6	Reference documents

[1] Official Journal of the European Communities L 268/36 of 19.9.1997

ANNEX 1

PRODUCT DETAILS AND DEFINITIONS

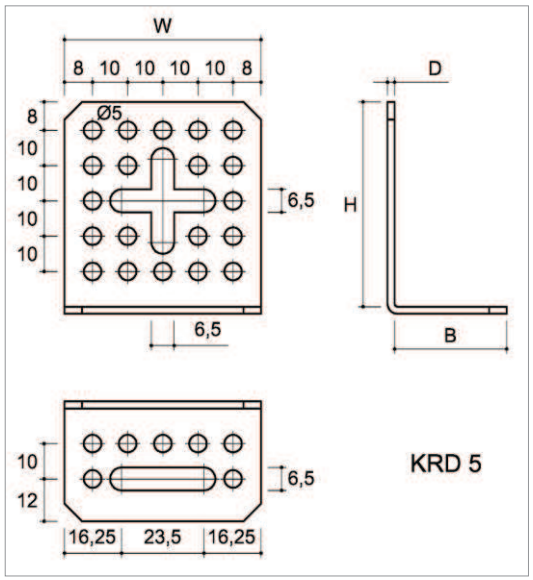


Figure 1 Type KRD 5

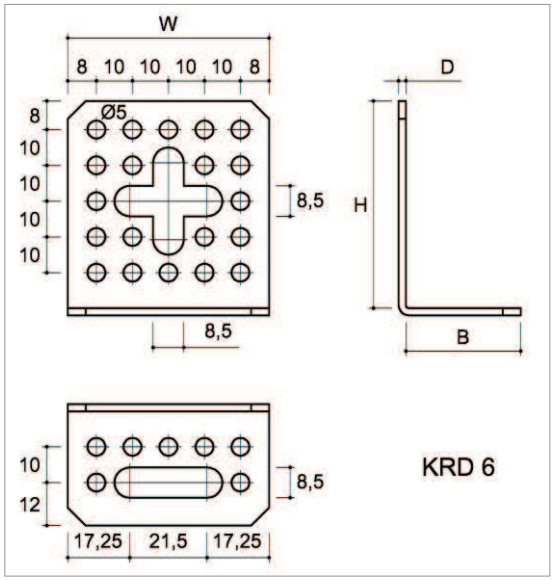


Figure 2 Type KRD 6

Table 2 KRD three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Number of holes
	W	H	B	D	ø 5
KRD 5	56	58	32	2	27
KRD 6	56	58	32	2	27

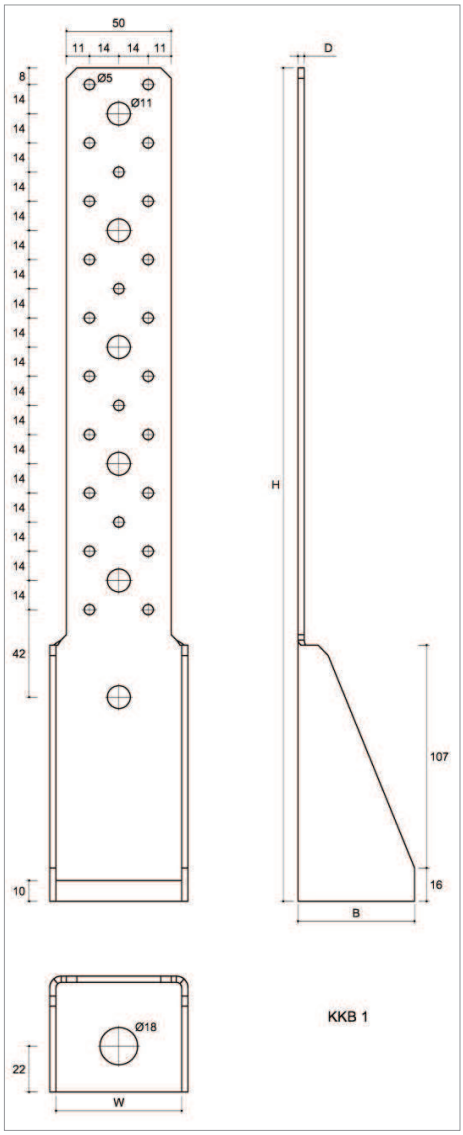


Figure 3 Type KKB 1

Table 3 KKB three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	B	D	ø 5	ø 11	ø 18
KKB 1	60	400	56	3	24	6	1

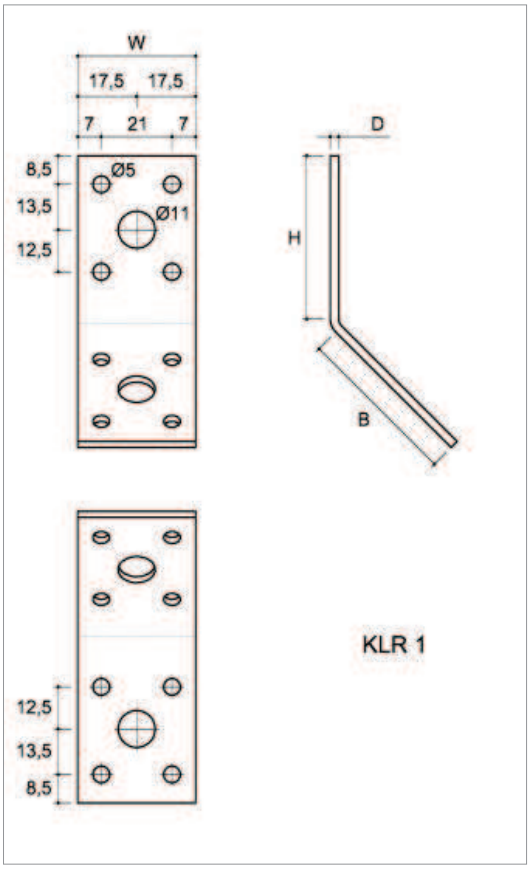


Figure 4 Type KLR 1

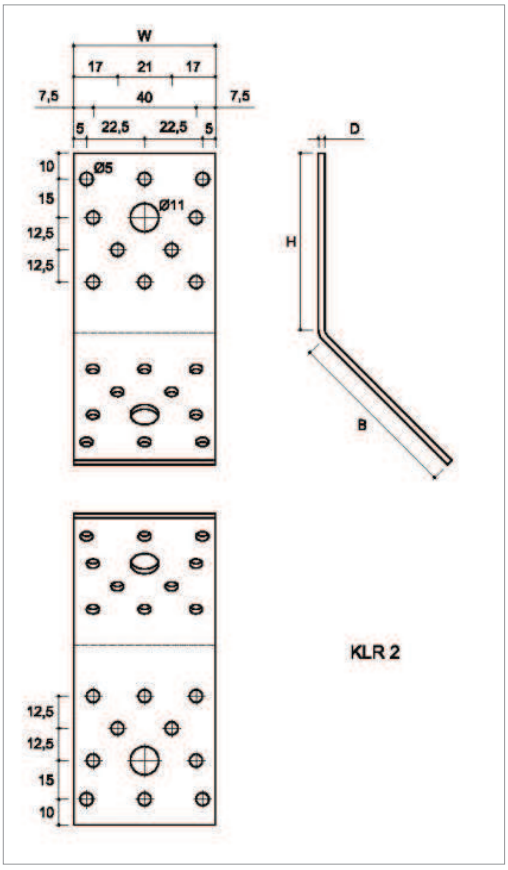


Figure 5 Type KLR 2

Table 4 KLR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
KLR 1	35	50	50	2.5	8	2
KLR 2	55	70	70	2.5	20	2

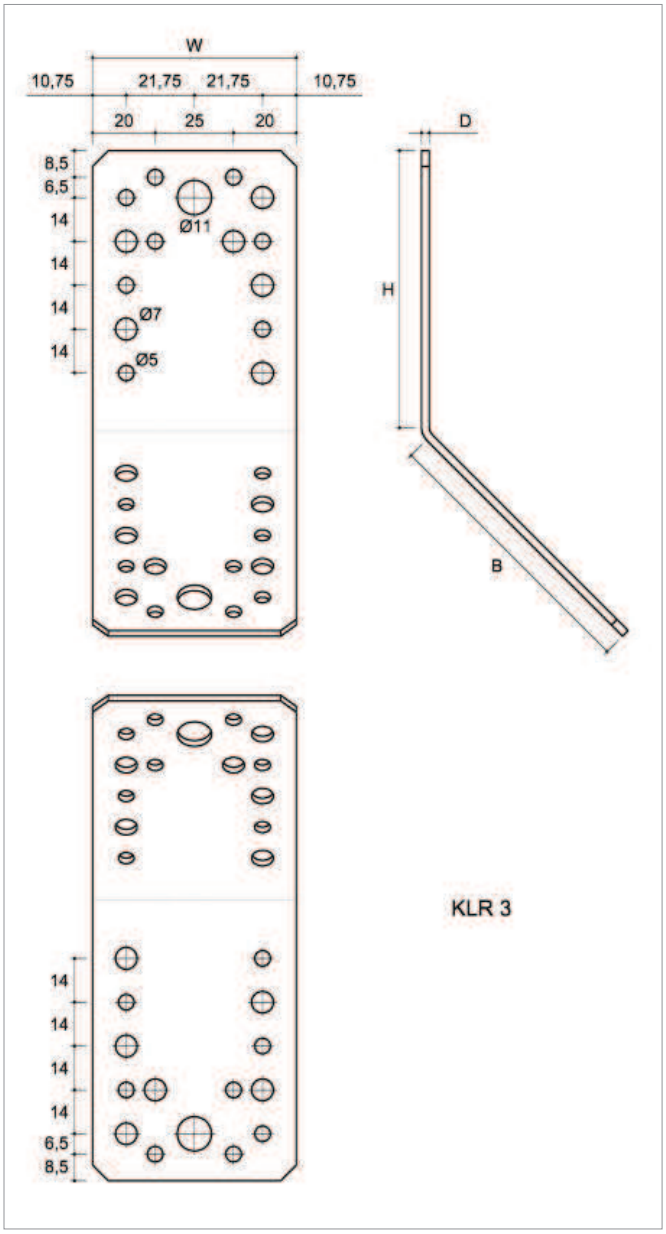


Figure 6 Type KLR 3

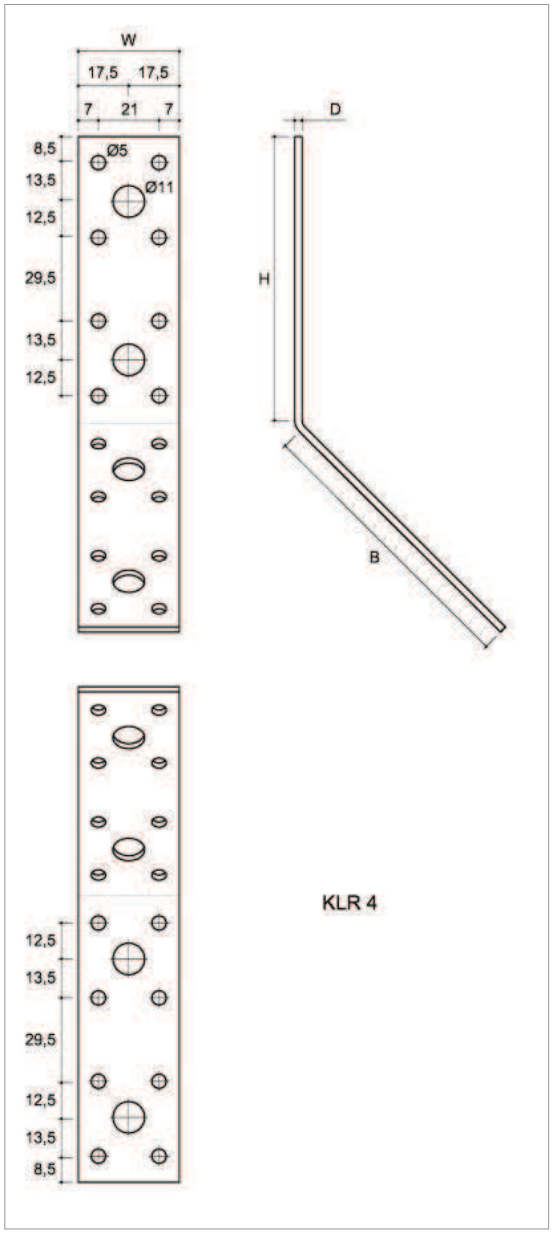


Figure 7 Type KLR 4

Table 5 KLR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	B	D	ø 5	ø 7	ø 11
KLR 3	65	90	90	2.5	16	12	2
KLR 4	35	100	100	2.5	16	-	4

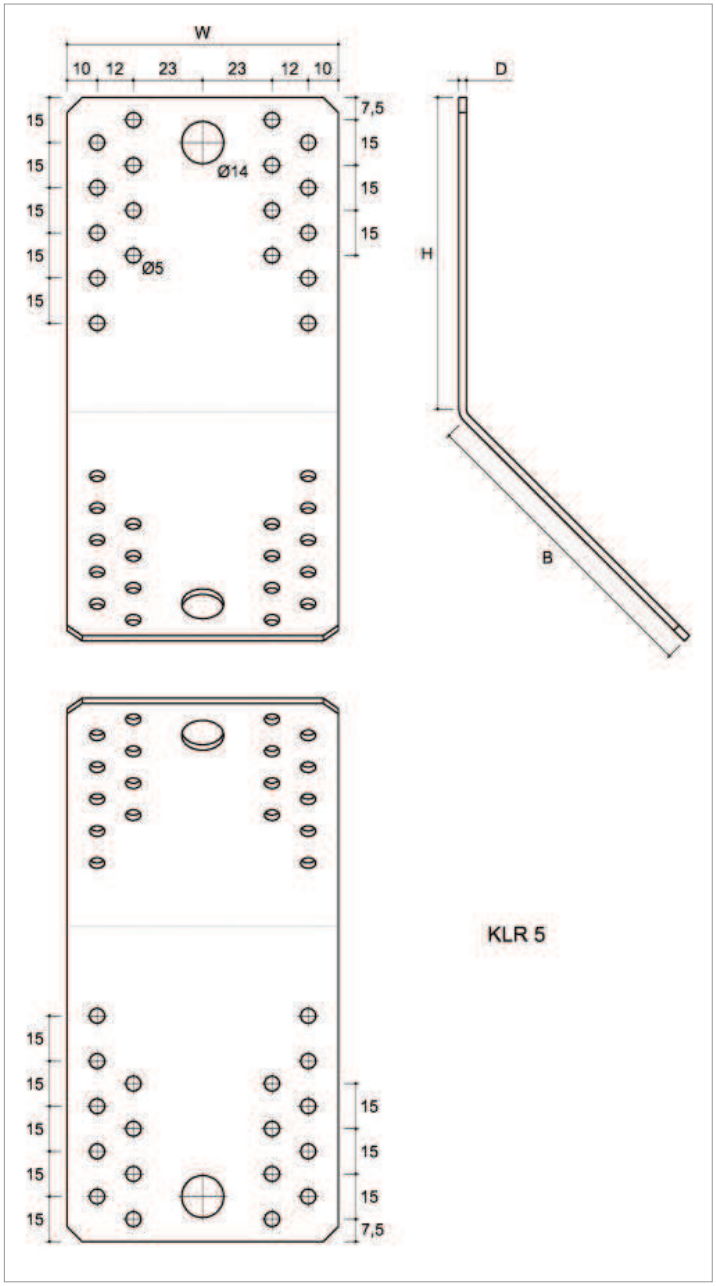


Figure 8 Type KLR 5

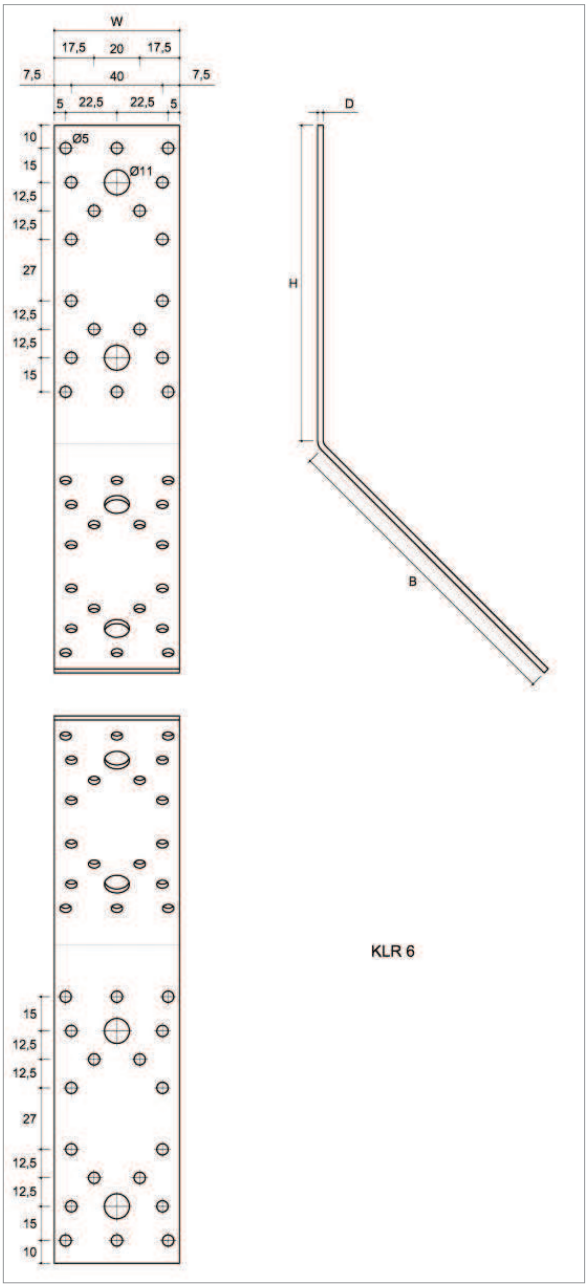


Figure 9 Type KLR 6

Table 6 KLR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	B	D	ø 5	ø 11	ø 14
KLR 5	90	105	105	2.5	36	-	2
KLR 6	55	140	140	2.5	36	4	-

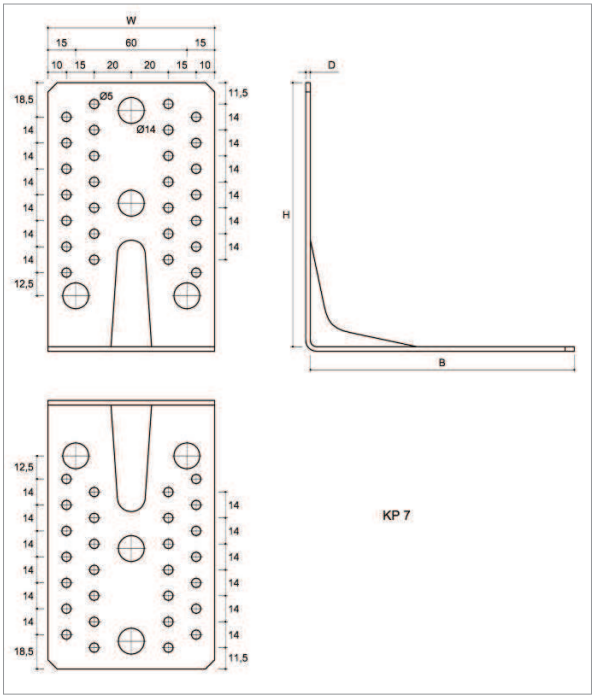


Figure 10 Type KP 7

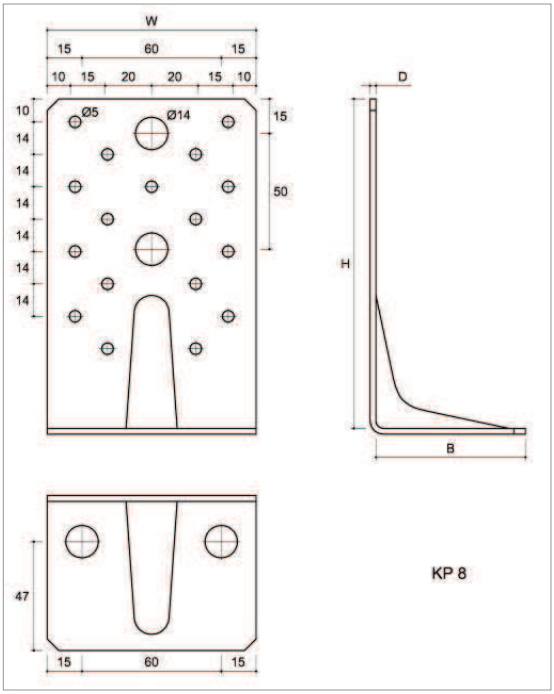


Figure 11 Type KP 8

Table 7 KP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 14
KP 7	90	143	143	2.5	56	8
KP 8	90	143	65	2.5	17	4

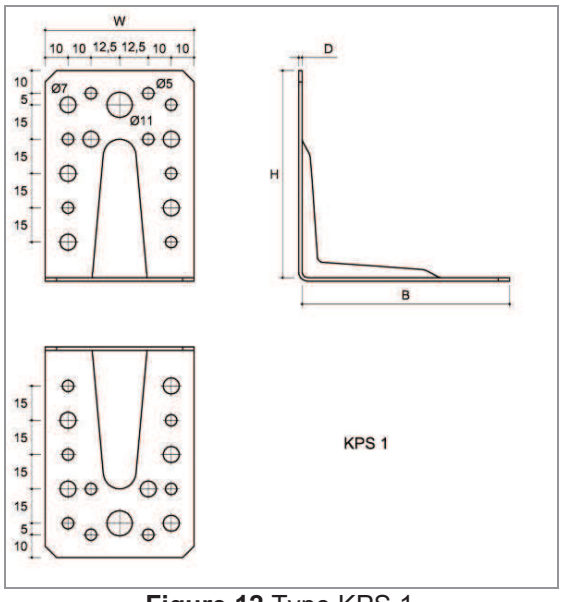


Figure 12 Type KPS 1

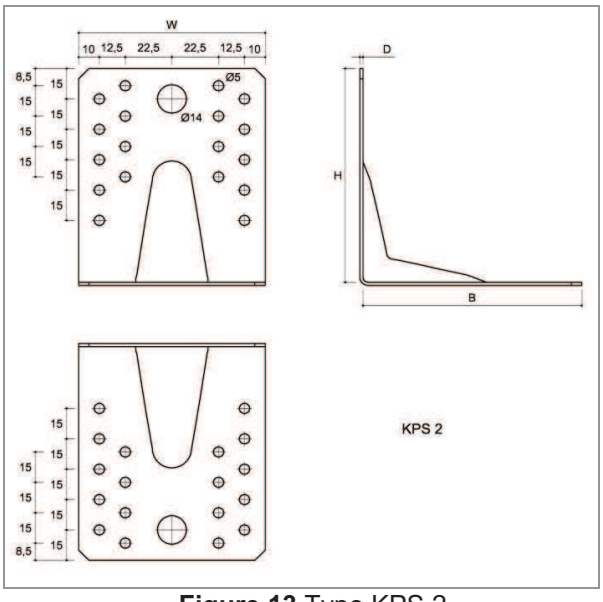


Figure 13 Type KPS 2

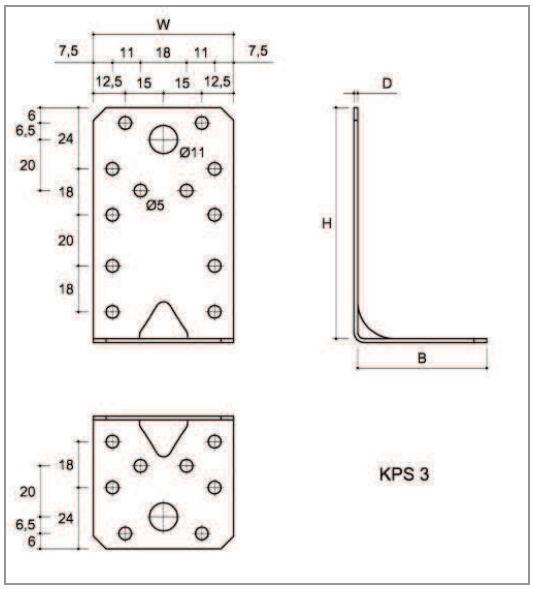


Figure 14 Type KPS 3

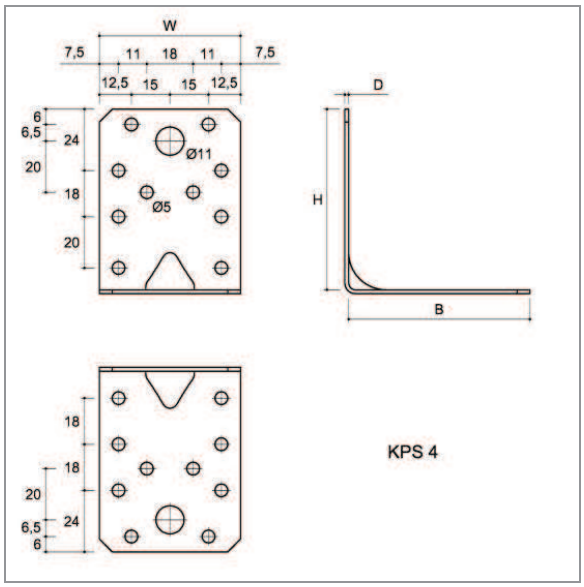


Figure 15 Type KPS 4

Table 8 KPS three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings			
	W	H	B	D	ø 5	ø 7	ø 11	ø 14
KPS 1	65	90	90	1,5	16	12	2	-
KPS 2	90	105	105	1,5	36	-	-	2
KPS 3	55	90	50	1,5	20	-	2	-
KPS 4	55	70	70	1,5	20	-	2	-

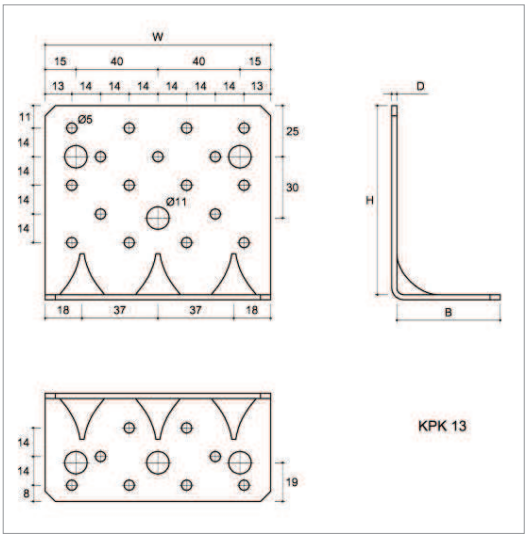


Figure 16 Type KPK 13

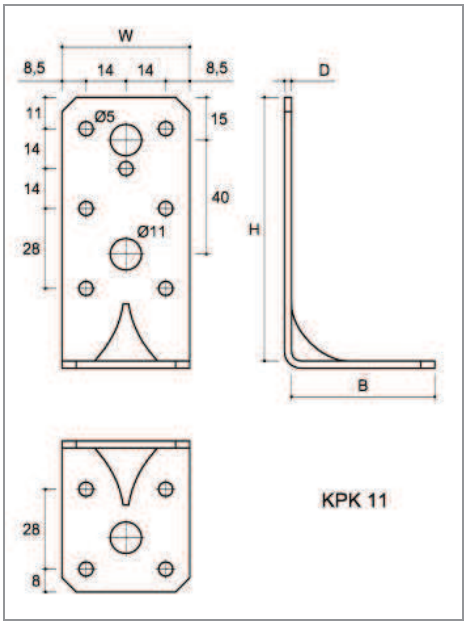


Figure 17 Type KPK 11

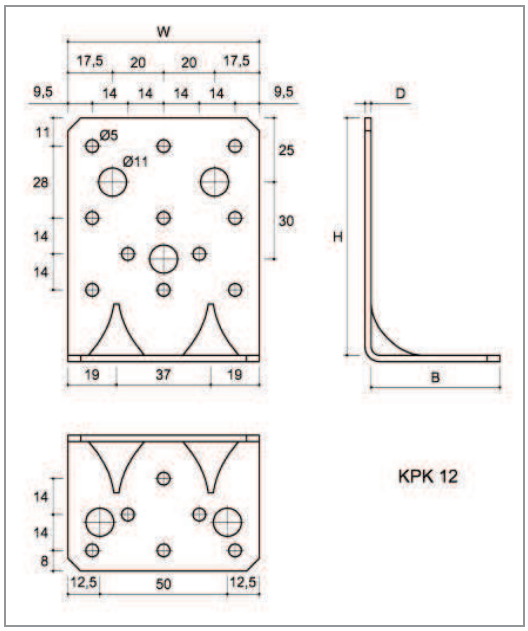


Figure 18 Type KPK 12

Table 9 KPK three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
KPK 11	45	93	50	2.5	11	3
KPK 12	75	93	50	2.5	17	5
KPK 13	110	93	50	2.5	25	6

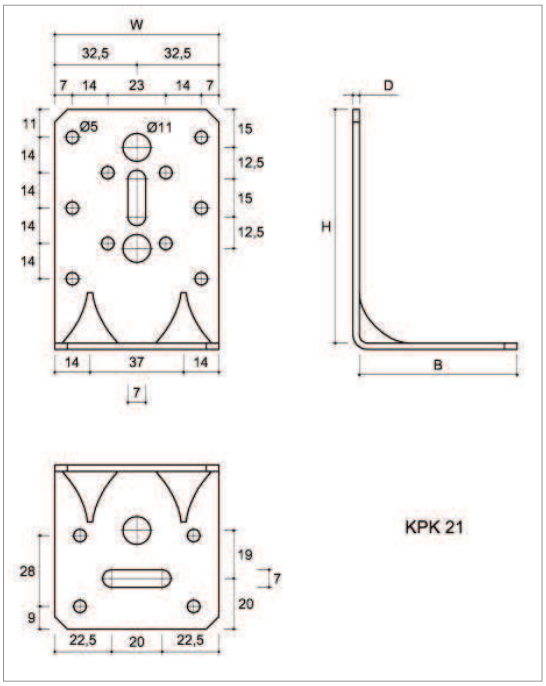


Figure 19 Type KPK 21

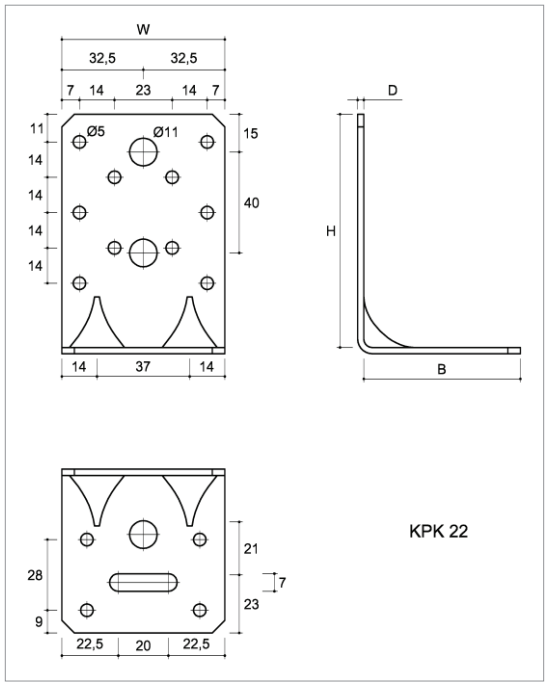


Figure 20 Type KPK 22

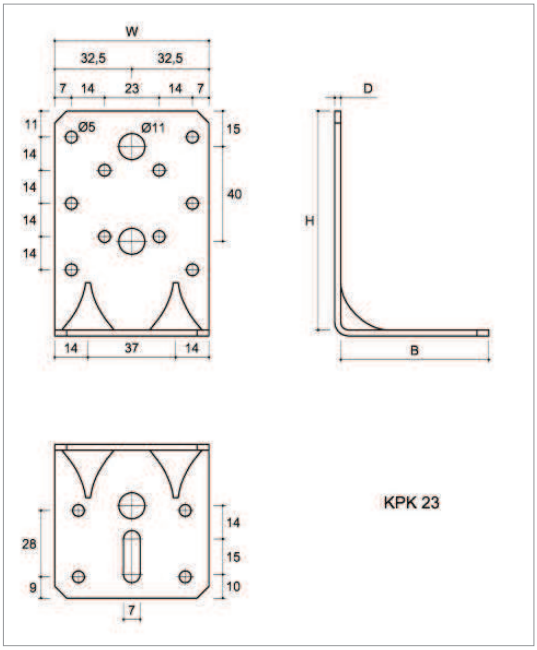


Figure 21 Type KPK 23

Table 10 KPK three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
KPK 21	65	93	63	2.5	14	3
KPK 22	65	93	63	2.5	14	3
KPK 23	65	93	63	2.5	14	3

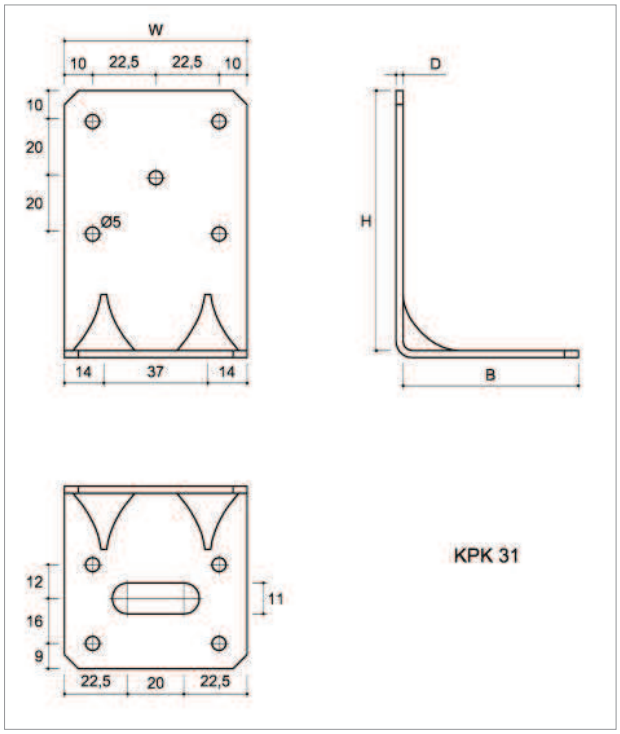


Figure 22 Type KPK 31

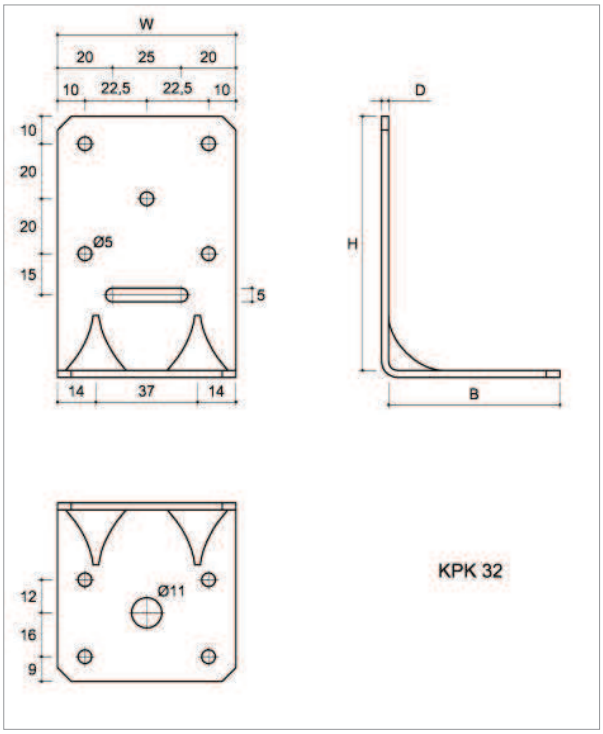


Figure 23 Type KPK 32

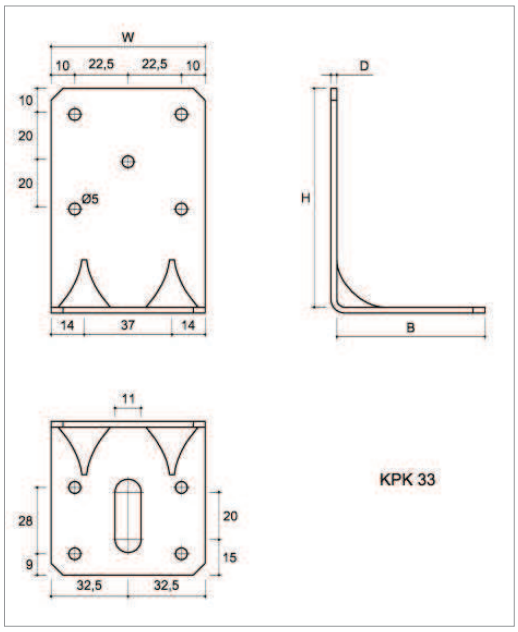


Figure 24 Type KPK 33

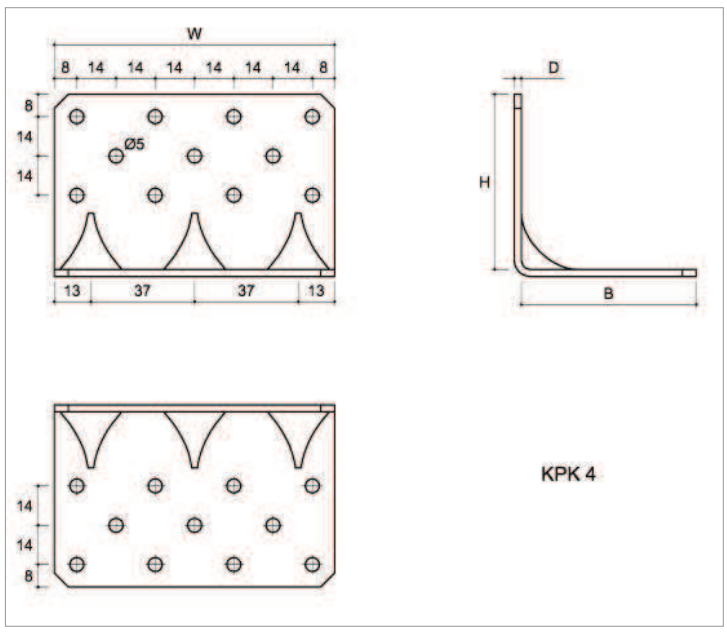


Figure 25 Type KPK 4

Table 11 KPK three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
KPK 31	65	93	63	2.5	9	-
KPK 32	65	93	63	2.5	9	1
KPK 33	65	93	63	2.5	9	-
KPK 4	100	63	63	2.5	22	-

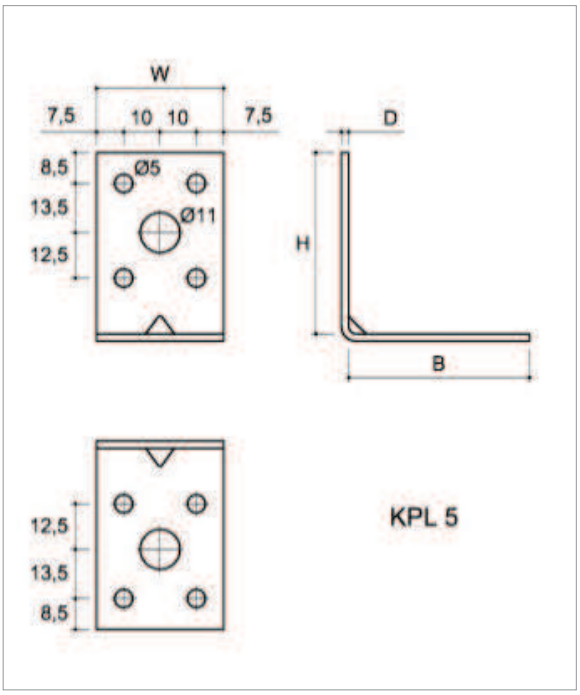


Figure 26 Type KPL 5

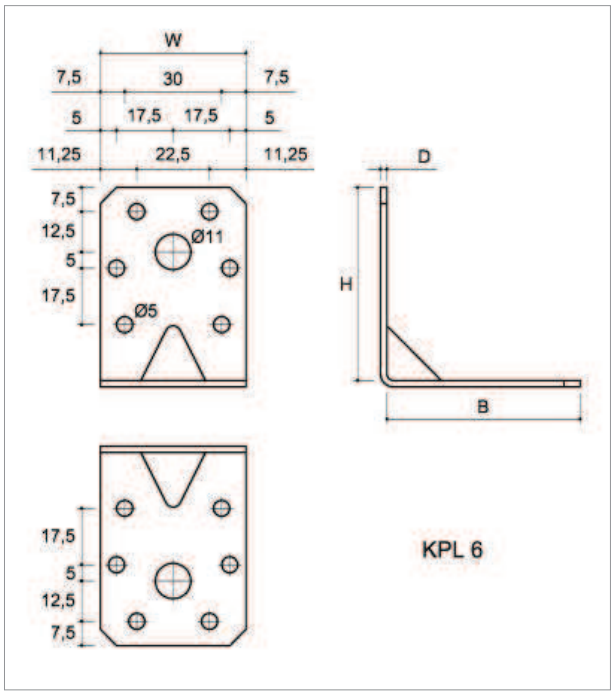


Figure 27 Type KPL 6

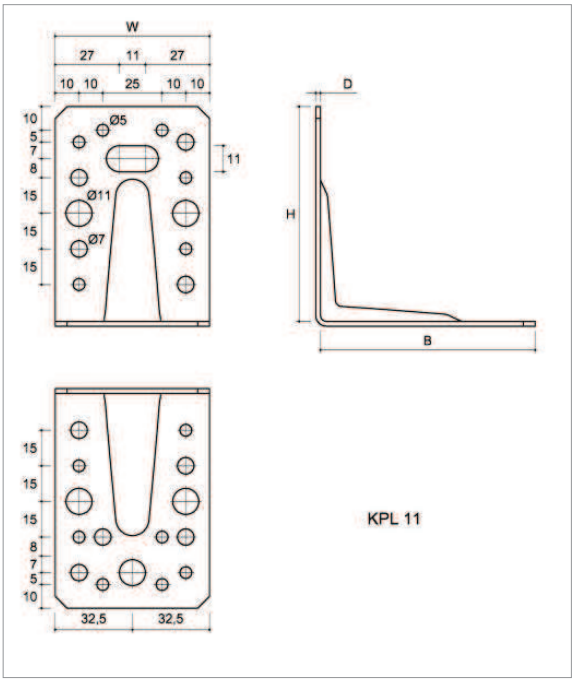


Figure 28 Type KPL 11

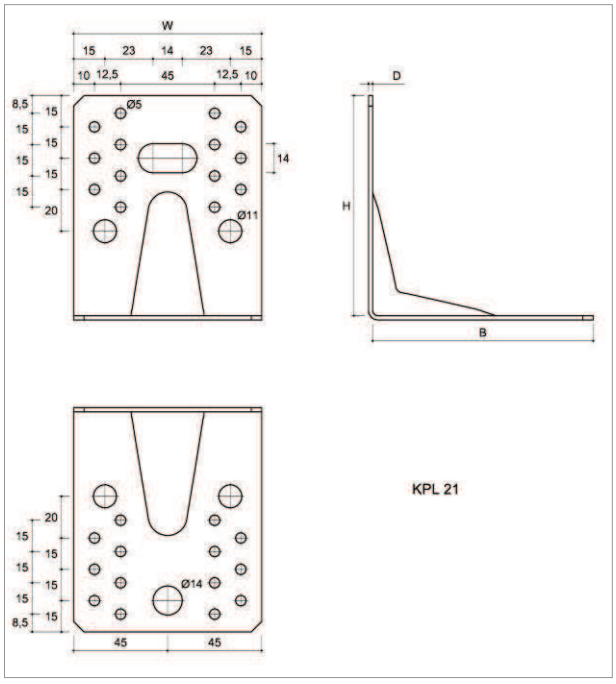


Figure 29 Type KPL 21

Table 12 KPL three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings			
	W	H	B	D	ø 5	ø 7	ø 11	ø 14
KPL 5	35	50	50	2	8	-	2	-
KPL 6	45	60	60	2	12	-	2	-
KPL 11	65	90	90	2	13	9	5	-
KPL 21	90	105	105	2	28	-	4	1

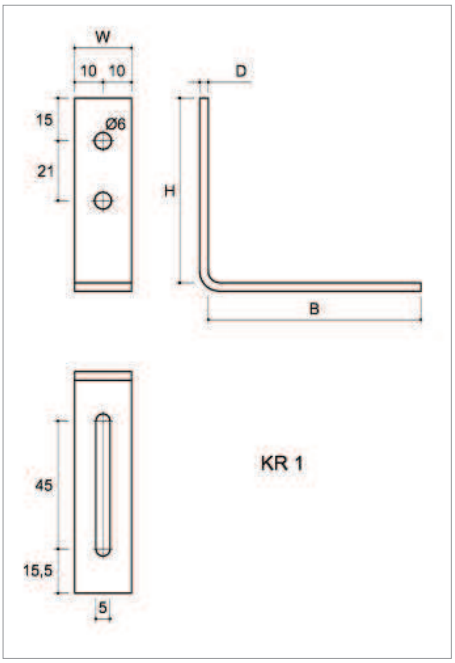


Figure 30 Type KR 1

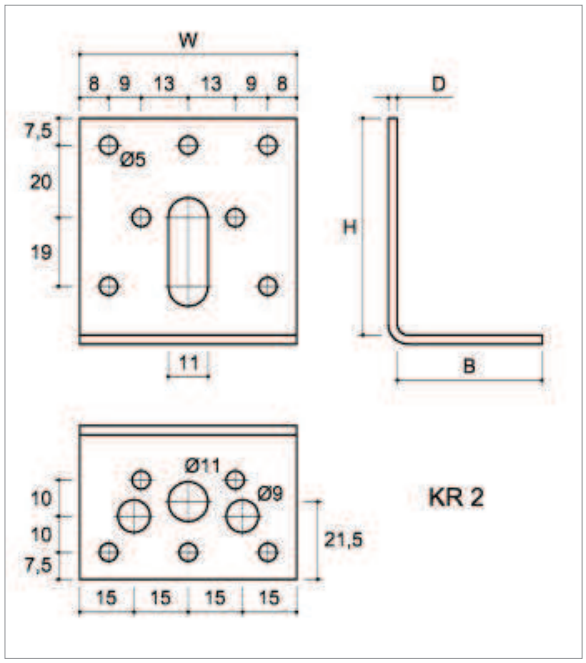


Figure 31 Type KR 2

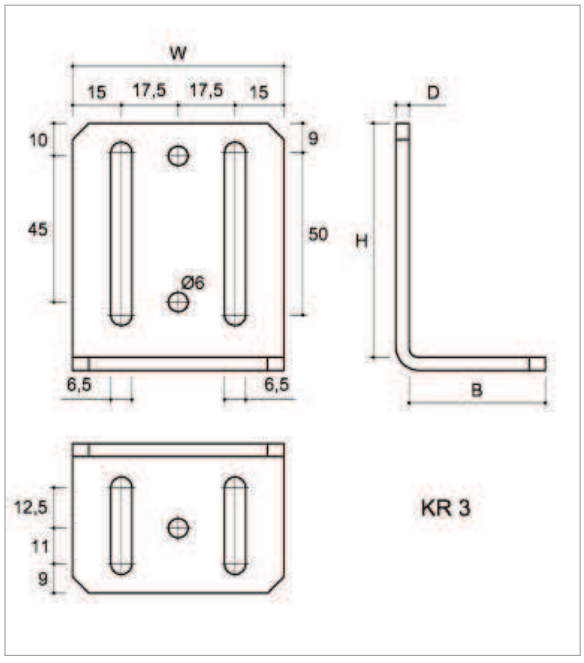


Figure 32 Type KR 3

Table 13 KR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings			
	W	H	B	D	ø 5	ø 6	ø 9	ø 11
KR 1	20	65	75	3	-	2	-	-
KR 2	60	60	40	2.5	12	-	2	1
KR 3	65	72	42	4	-	3	-	-

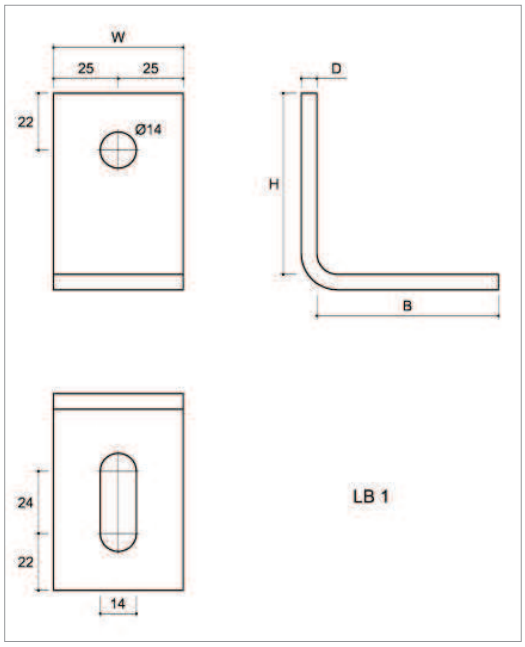


Figure 33 Type LB 1

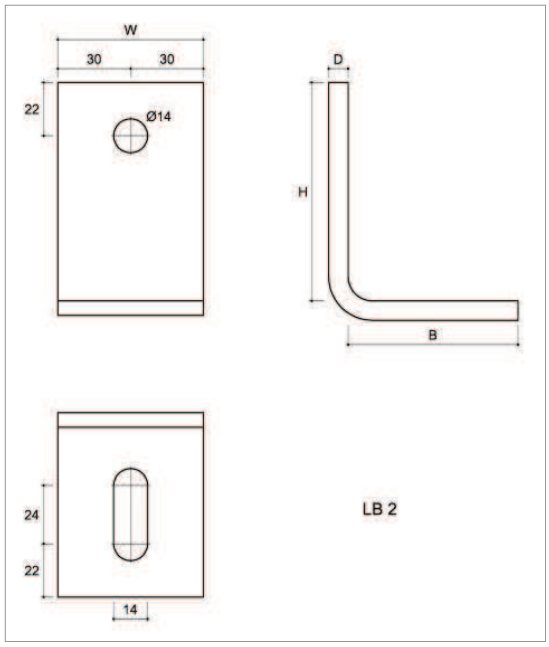


Figure 34 Type LB 2

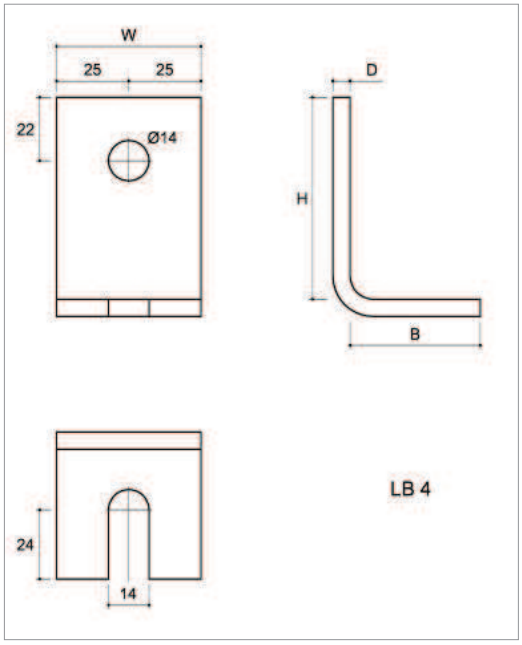


Figure 35 Type LB 4

Table 14 LB three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings
	W	H	B	D	ø 14
LB 1	50	70	70	6	1
LB 2	60	90	70	8	1
LB 4	50	70	45	6	1

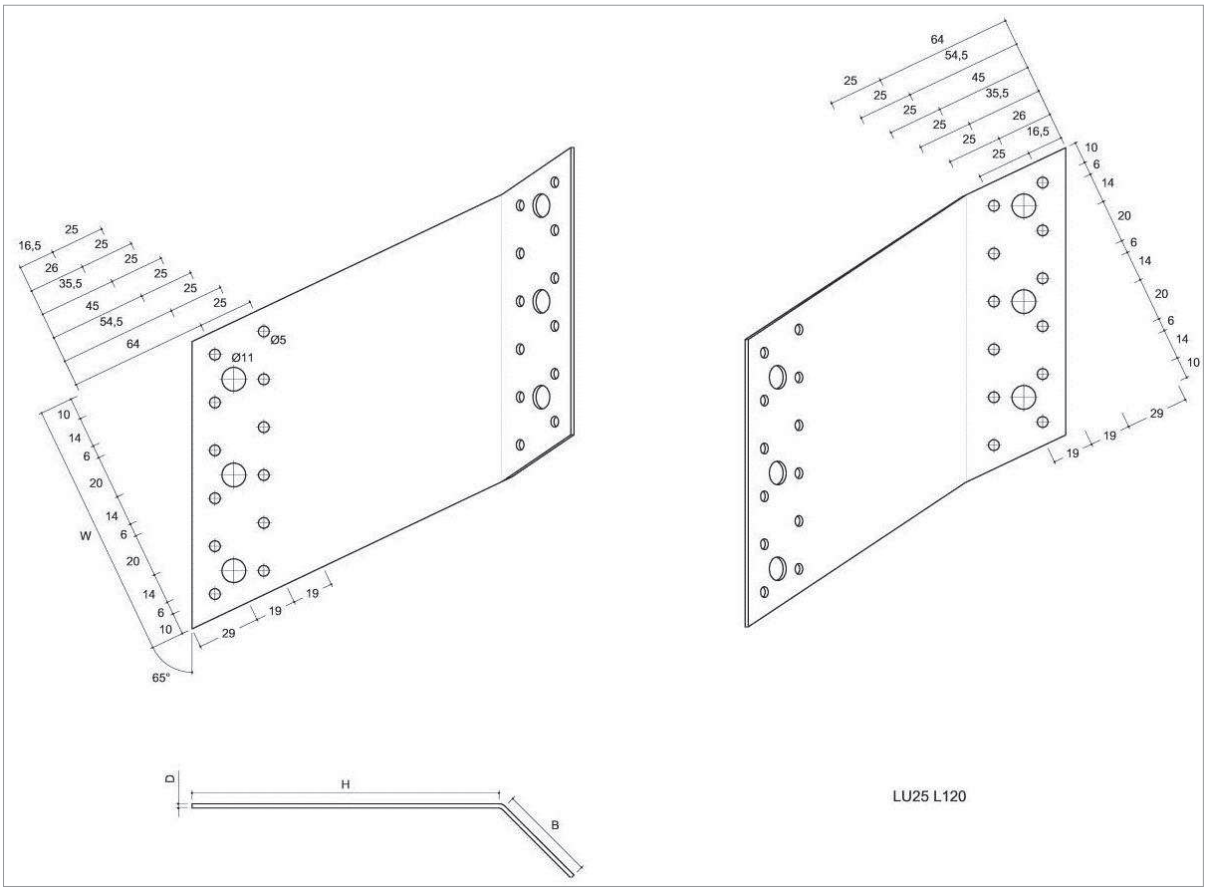


Figure 36 Type LU25 L120

Table 15 LU25 three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
LU25 L80	80	142	45	2	16	4
LU25 R80	80	142	45	2	16	4
LU25 L120	120	142	45	2	24	6
LU25 R120	120	142	45	2	24	6

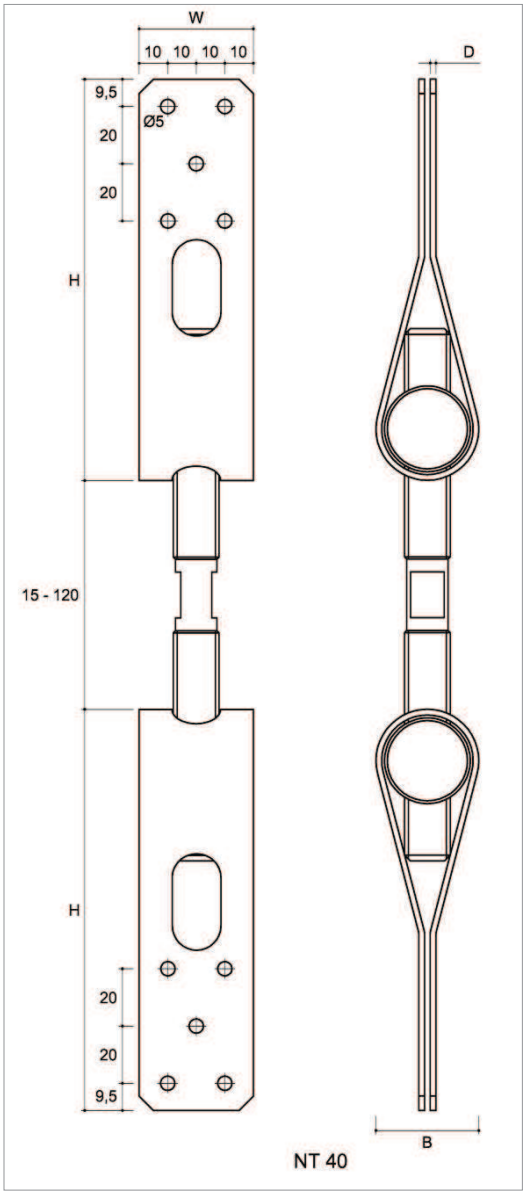


Figure 37 Type NT 40

Table 16 NT three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings
	W	H	B	D	ø 5
NT 25	30	137	25	1.5	12
NT 40	40	140	36	2	10
NT 60	60	140	36	2	14

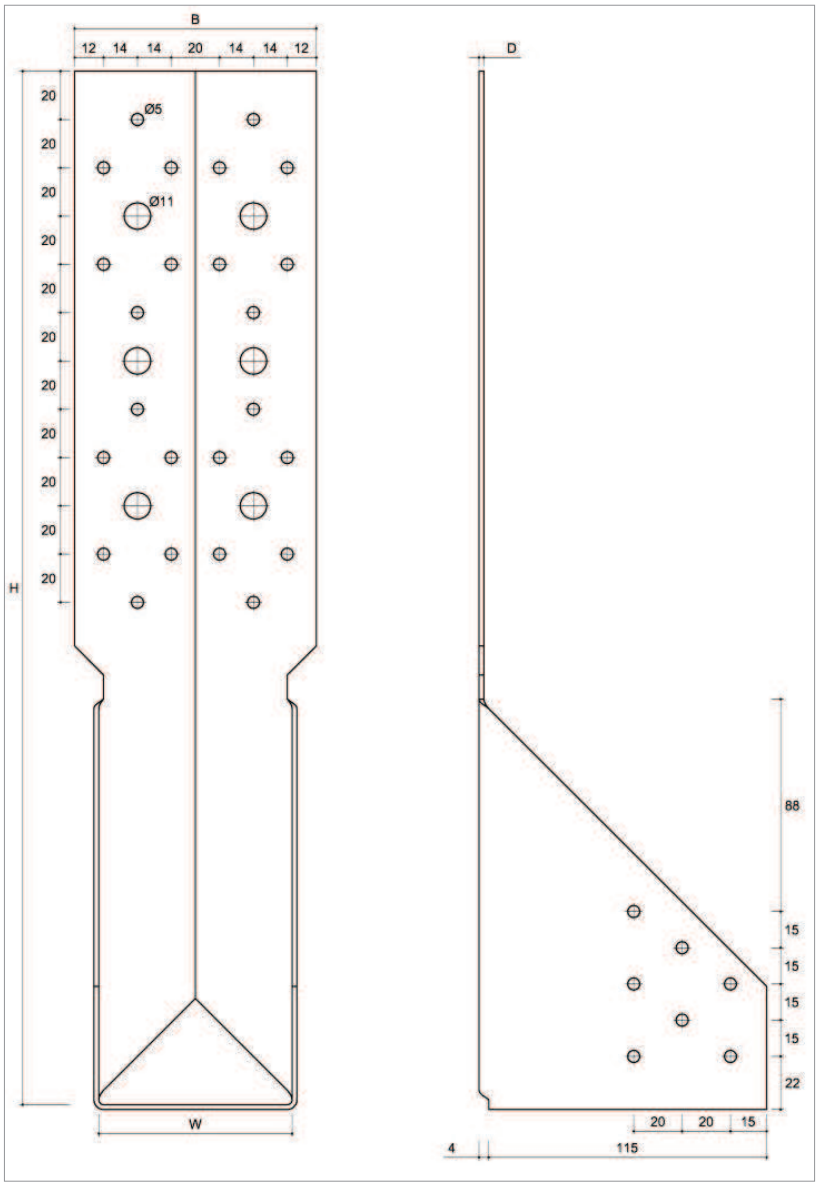


Figure 38 Type WBC 80

Table 17 WBC three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
WBC 80	80	428	100	2	38	6
WBC 92	92	443	114	2	42	8
WBC 100	100	443	120	2	42	8
WBC 120	120	505	148	2	48	10
WBC 137	137	515	160	2	52	12

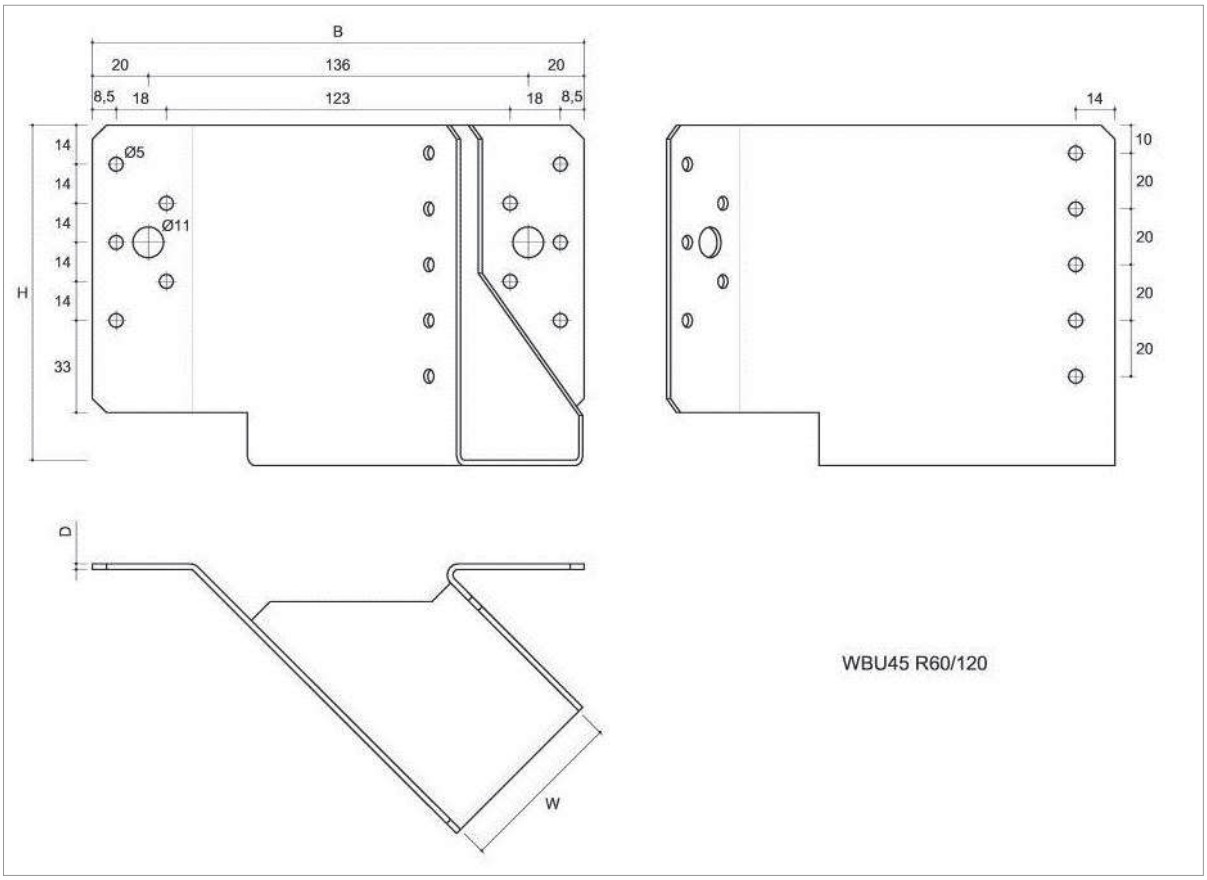


Figure 39 Type WBU 45 R60/120

Table 18 WBU 45 three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 11
WBU45 R45/105 WBU45 L45/105	45	105	155	2	12	2
WBU45 R50/105 WBU45 L50/105	50	105	162	2	12	2
WBU45 R60/120 WBU45 L60/120	60	120	176	2	15	2

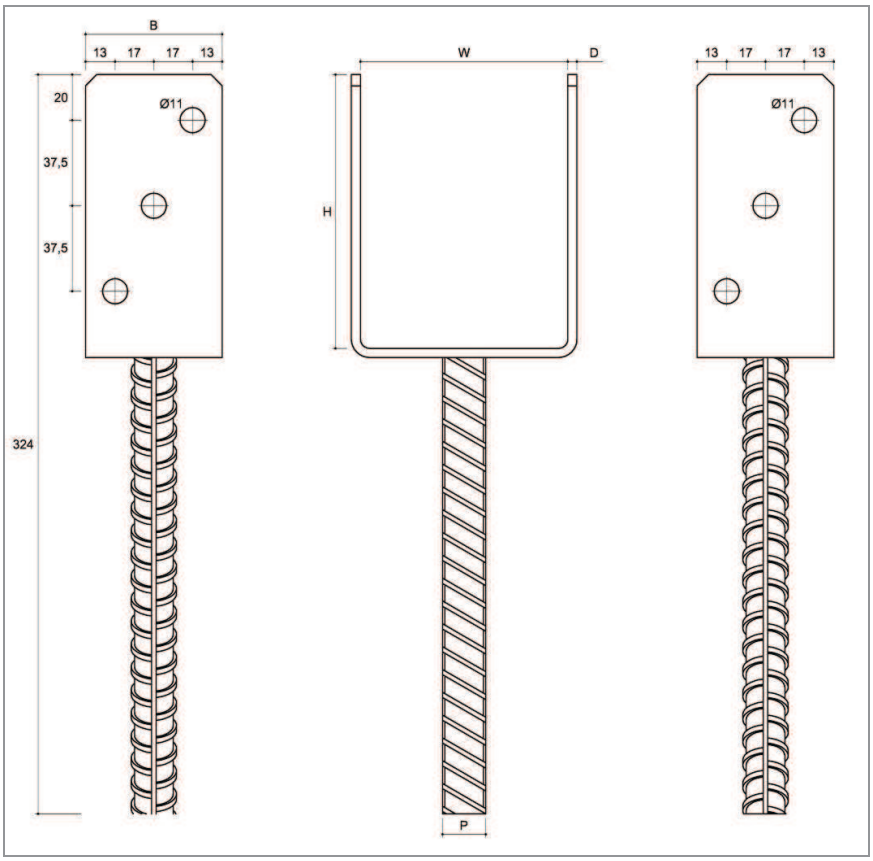


Figure 40 Type PS 90

Table 19 PS three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm					Quantity of openings
	W	H	B	D	P	ø 11
PS 60	61	120	60	4	ø 16	6
PS 70	71	120	60	4	ø 16	6
PS 80	81	120	60	4	ø 18	6
PS 90	91	120	60	4	ø 18	6
PS 100	101	120	60	4	ø 18	6
PS 120	121	120	60	4	ø 18	6
PS 140	141	120	60	4	ø 18	6

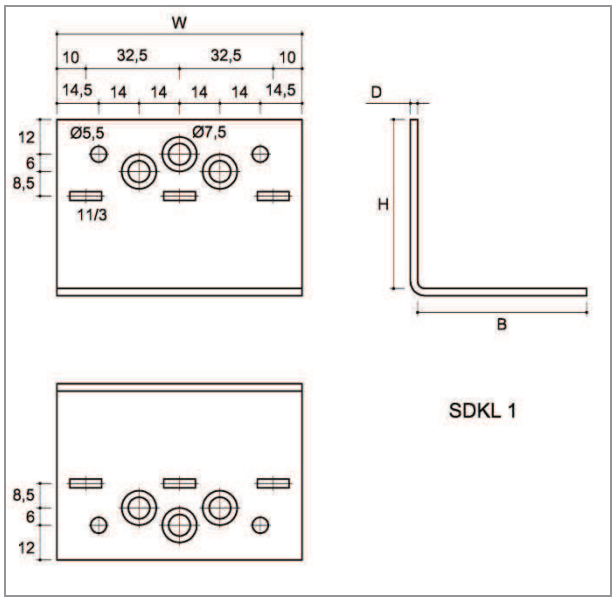


Figure 41 Type SDKL 1

Table 20 SDKL three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	B	D	ø 5.5	ø 7.5	11/3
SDKL 1	85	58	58	2,5	4	6	6

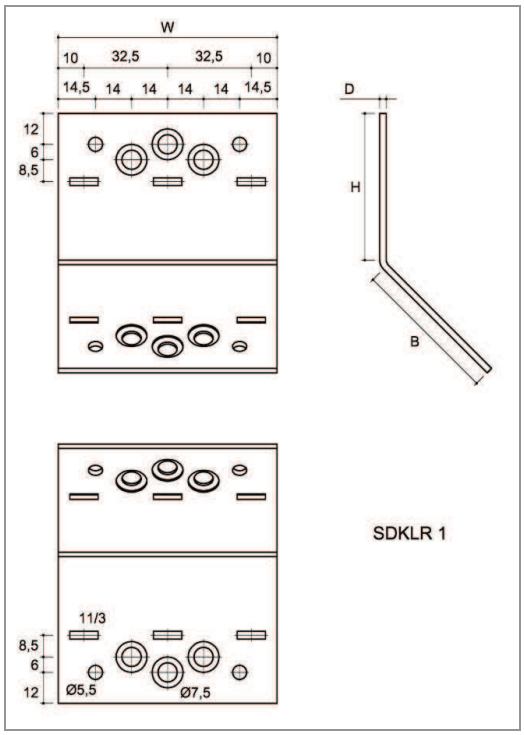


Figure 42 Type SDKLR 1

Table 21 SDKLR three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	B	D	ø 5.5	ø 7.5	11/3
SDKLR 1	85	57	57	2,5	4	6	6

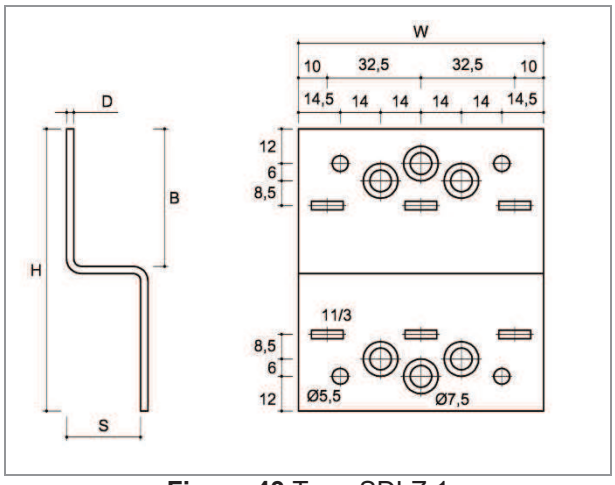


Figure 43 Type SDLZ 1

Table 22 SDLZ 1 three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm					Quantity of openings		
	W	H	B	S	D	ø 5.5	ø 7.5	11/3
SDLZ 1	85	96,5	47	24	2,5	4	6	6

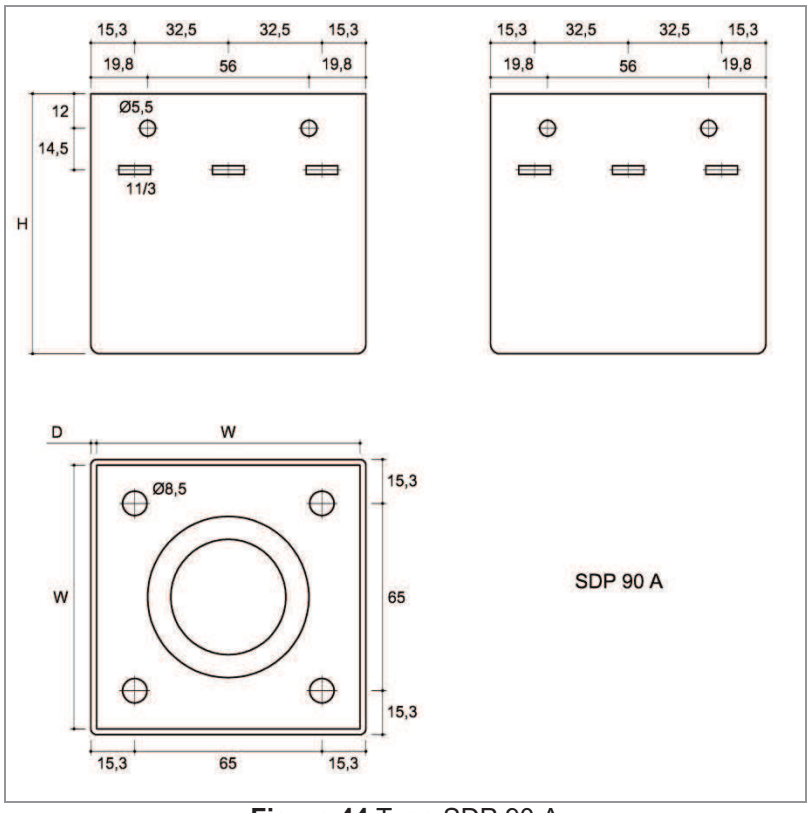


Figure 44 Type SDP 90 A

Table 23 SDP 90 A three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm			Quantity of openings		
	W	H	D	ø 5.5	ø 8.5	11/3
SDP 90 A	91	90	2	8	4	12
SDP 100 A	101	90	2	8	4	12
SDP 120 A	121	90	2	8	4	12

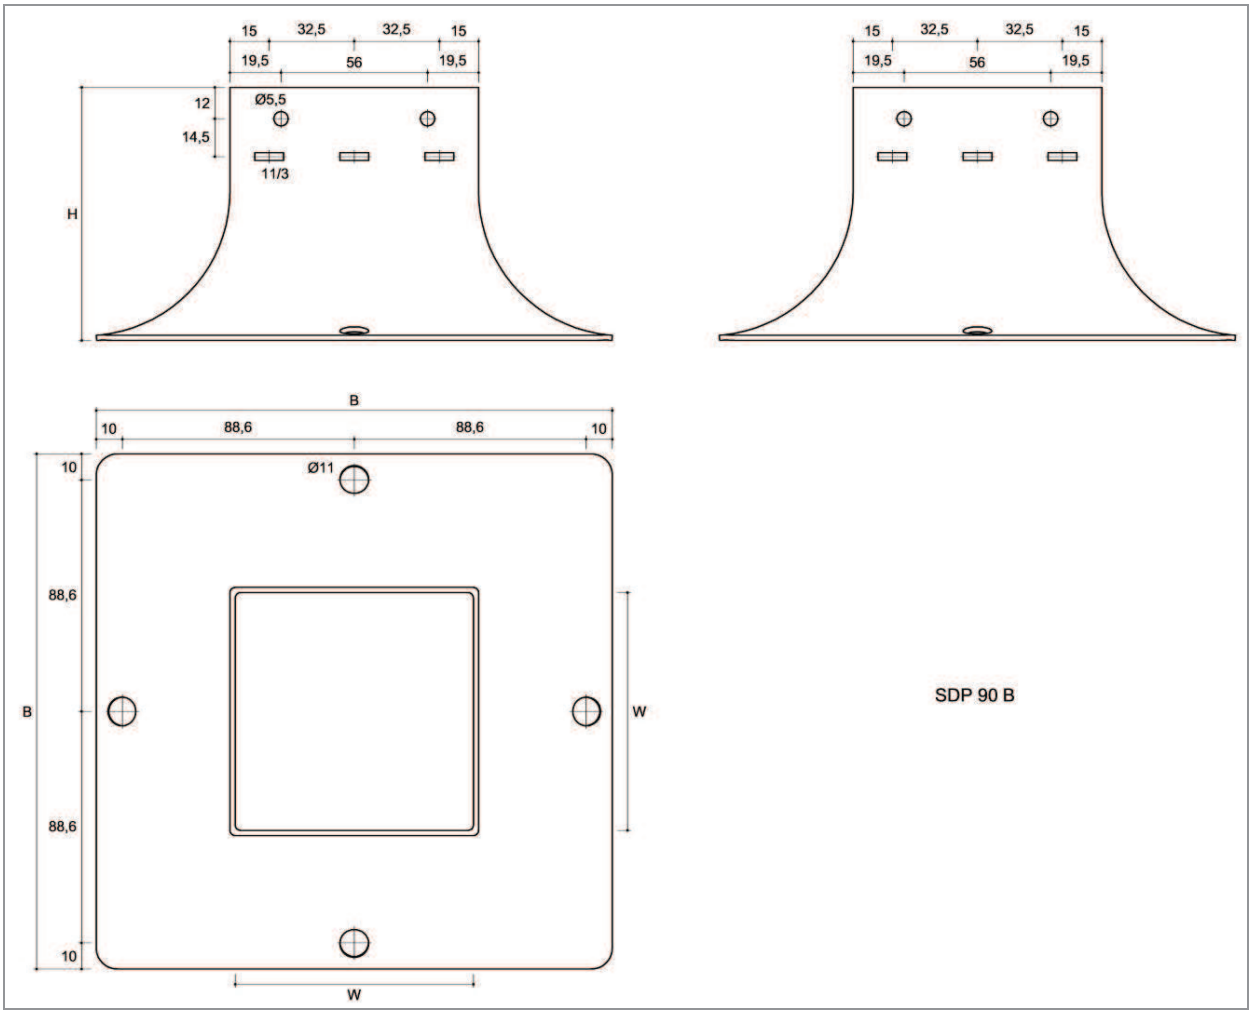


Figure 45 Type SDP 90 B

Table 24 SDP 90 B three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	D	B	ø 5.5	ø 11	11/3
SDP 90 B	91	97	2	197	8	4	12
SDP 100 B	101	97	2	207	8	4	12
SDP 120 B	121	97	2	227	8	4	12

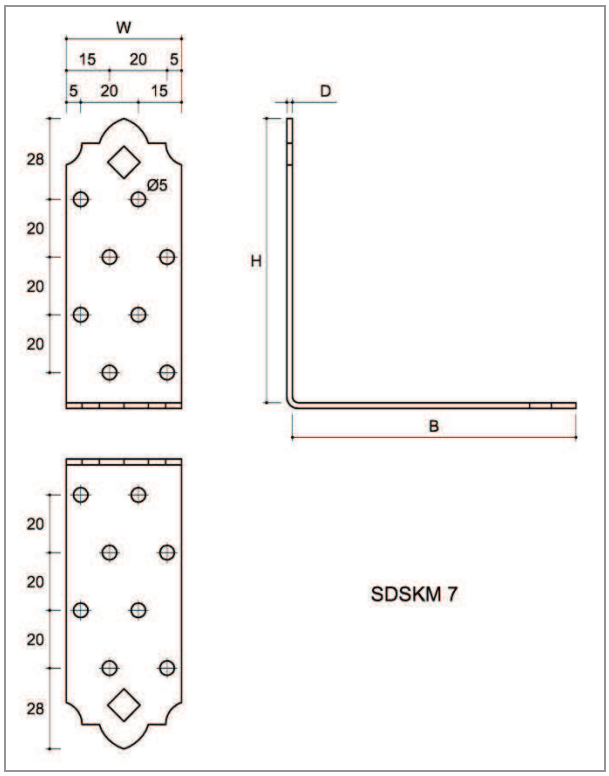


Figure 46 Type SDSKM 7

Table 25 SDSKM three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings
	W	H	B	D	ø 5
SDSKM 7	40	98	98	2	16

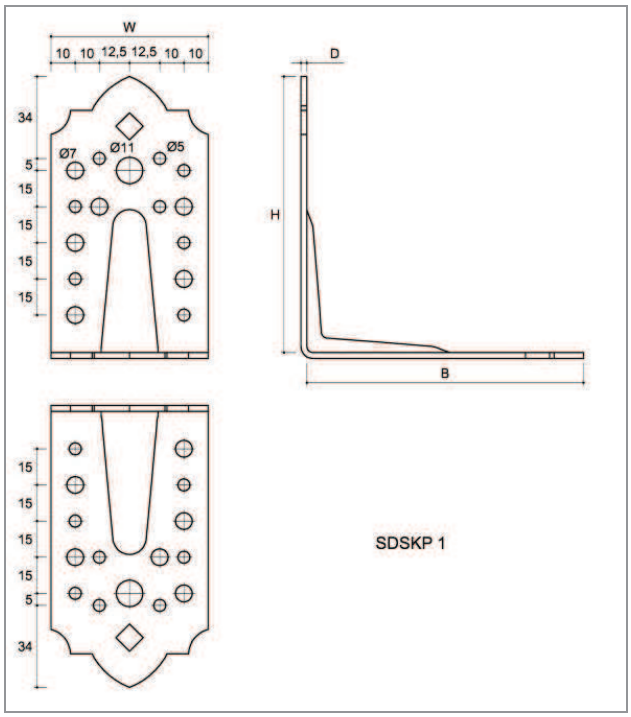


Figure 47 Type SDSKP 1

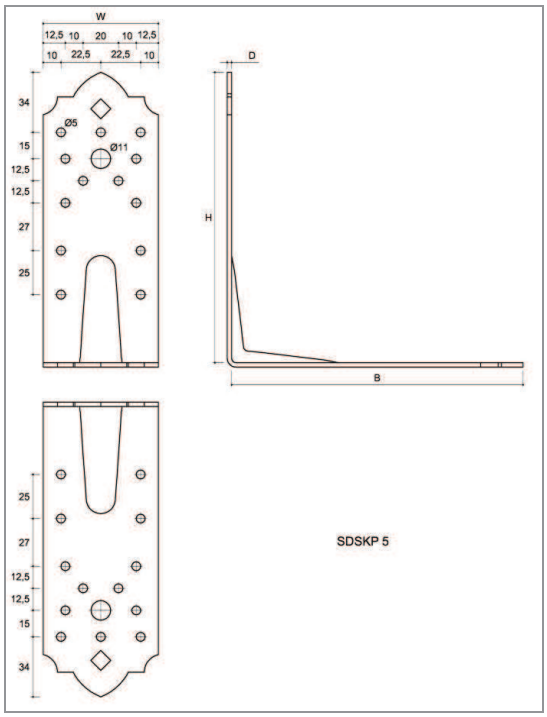


Figure 48 Type SDSKP 5

Table 26 SDSKP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings		
	W	H	B	D	ø 5	ø 7	ø 11
SDSKP 1	65	115	115	2,5	16	12	2
SDSKP 5	65	165	165	2,5	26	-	2

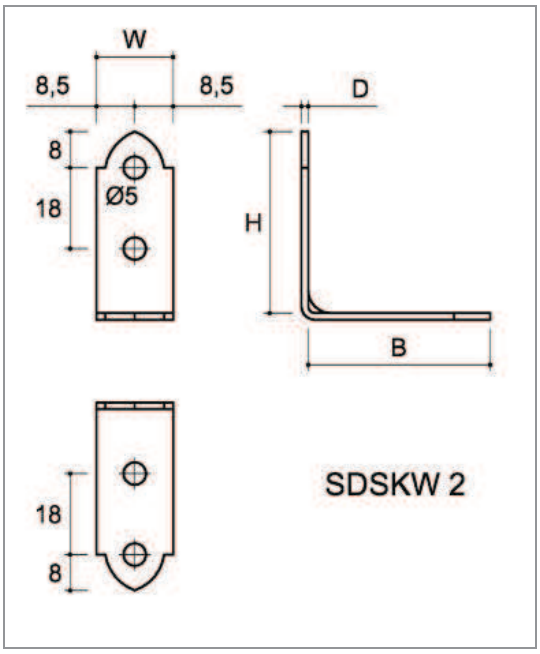


Figure 49 Type SDSKW 2

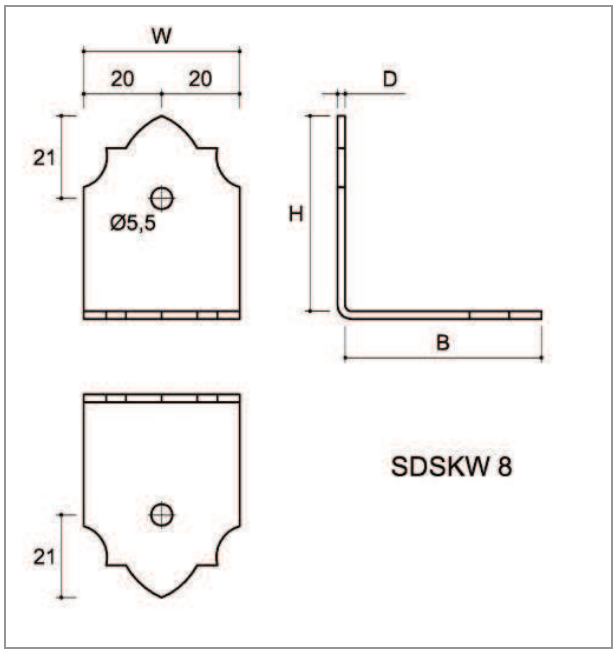


Figure 50 Type SDSKW 8

Table 27 SDSKW three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	B	D	ø 5	ø 5.5
SDSKW 2	17	40	40	1,5	4	-
SDSKW 8	40	50	50	2	-	2

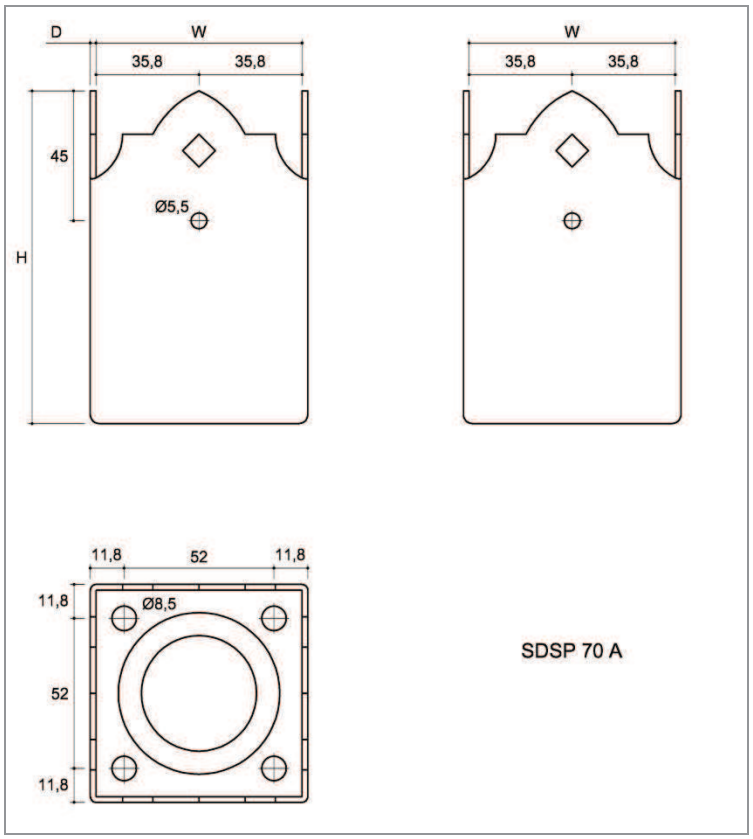


Figure 51 Type SDSP 70 A

Table 28 SDSP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm			Quantity of openings	
	W	H	D	ø 5.5	ø 8.5
SDSP 70 A	71	115	2	4	4

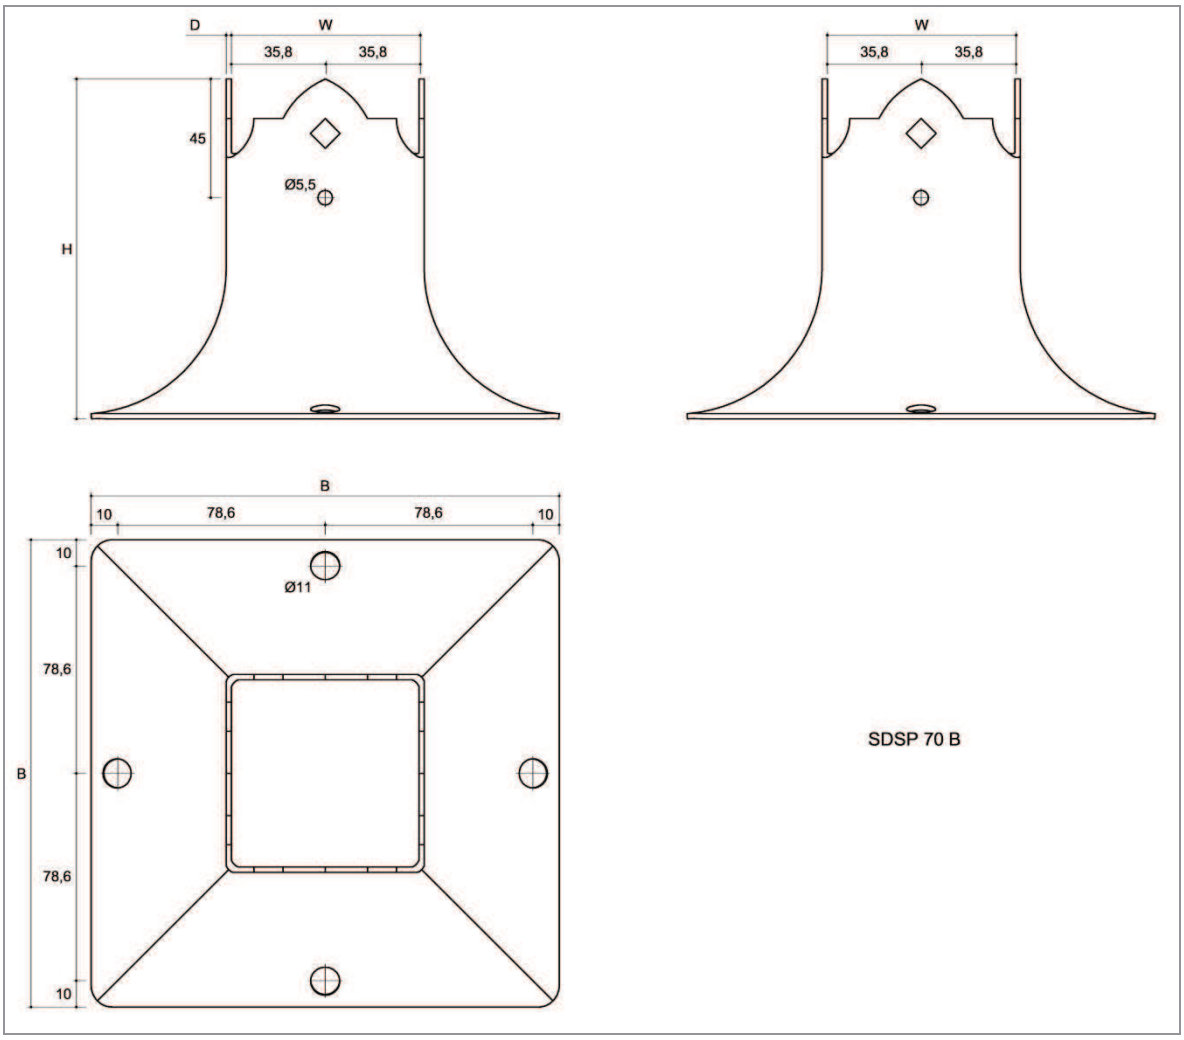


Figure 52 Type SDSP 70B

Table 29 SDSP three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm				Quantity of openings	
	W	H	D	B	ø 5.5	ø 11
SDSP 70 B	71	129	2	177	4	4

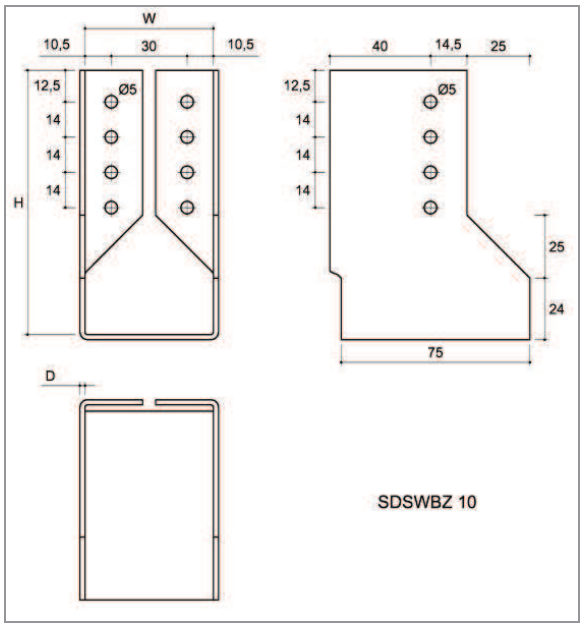


Figure 53 Type SDSWBZ 10

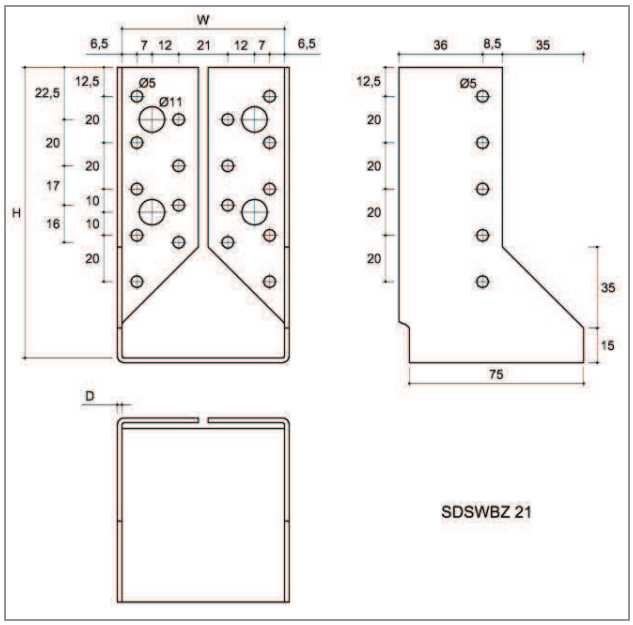


Figure 54 Type SDSWBZ 21

Table 30 SDSWBZ three-dimensional nailing plate symbols and dimensions

Symbol	Dimensions, mm			Quantity of openings	
	W	H	D	ø 5	ø 11
SDSWBZ 10	51	105	2	16	-
SDSWBZ 11	51	135	2	24	-
SDSWBZ 14	60	100	2	16	-
SDSWBZ 21	70	125	2	28	4
SDSWBZ 26	80	120	2	28	4
SDSWBZ 30	100	140	2	34	4

MASKING ELEMENTS

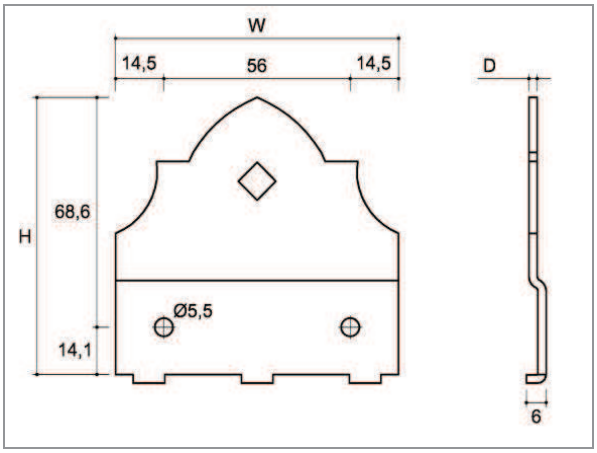


Figure 55 Type SDD 85 A

Table 31 SDD masking elements symbols and dimensions

Symbol	Dimensions, mm			Quantity of openings
	W	H	D	ø 5.5
SDD 85 A	85	83	2,5	2
SDD 85 B	85	83	2,5	2

CONNECTION ELEMENTS

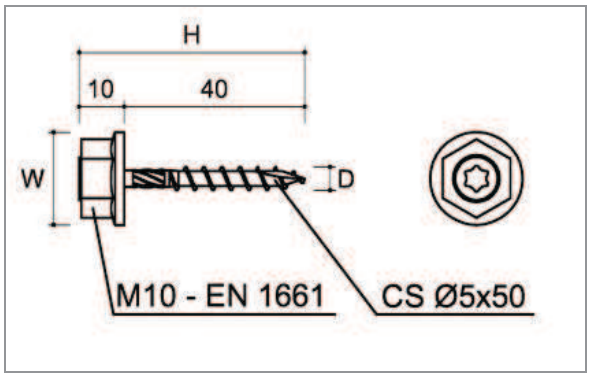


Figure 56 Type SDCS 50

Table 32 SDCS dowel type connector symbols and dimensions

Symbol	Dimensions, mm		
	W	H	D
SDCS 50	20.5	50	5.2

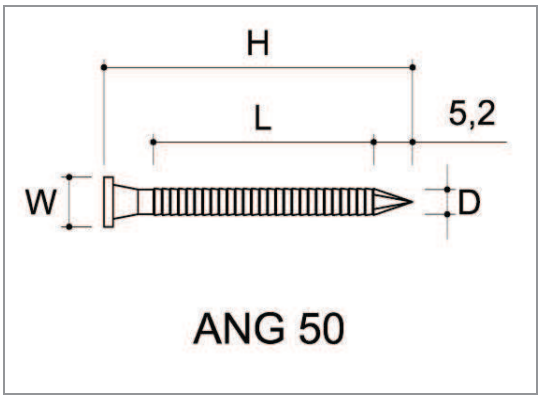


Figure 57 Type ANG 50

Table 33 Anchor dowel type connector symbols and dimensions

Symbol	Dimensions, mm			
	D	H	L	W
ANG 40	4	40	26.8	8
ANG 50	4	50	36.8	8

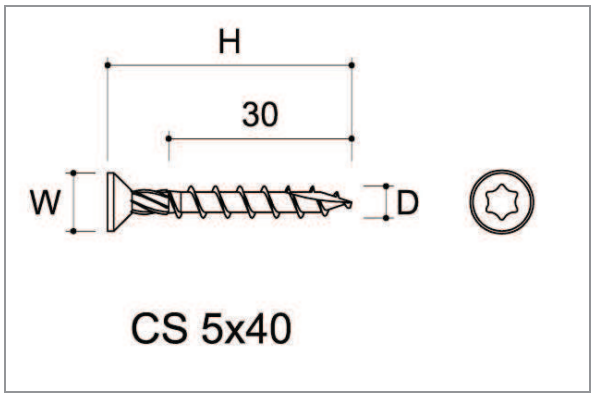


Figure 58 Type CS 5x40

Table 34 CS dowel type connector symbols and dimensions

Symbol	Dimensions, mm		
	D	H	W
CS 5x40	5	40	9.5
CS 5x50	5	50	9.5

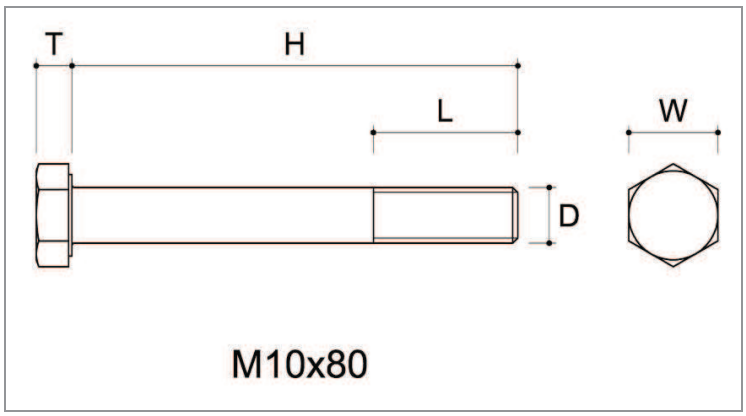


Figure 59 Type M10x80

Table 35 M bolt type connector symbols and dimensions

Symbol	Dimensions, mm					Standard
	D	H	L	W	T	
M5x16	M5	16	16	8	3.5	ISO 4017
M10x80	M10	80	26	16	6.4	ISO 4014
M12x90	M12	90	30	18	7.5	ISO 4014
M16x160	M16	160	44	24	10	ISO 4014

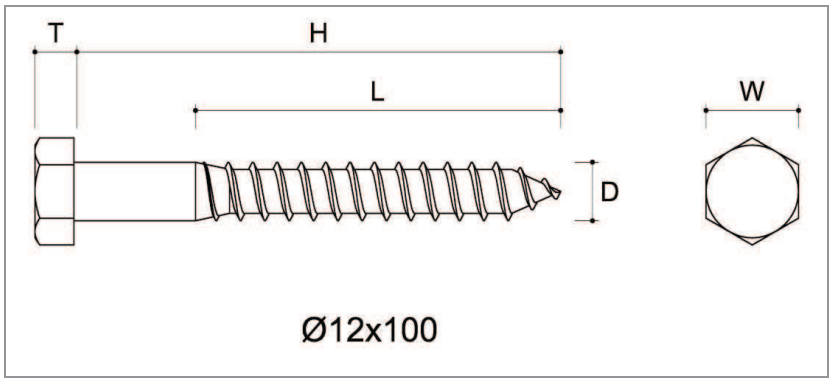


Figure 60 Type Ø12x100

Table 36 Ø12x100 type connector symbols and dimensions

Symbol	Dimensions, mm					Standard
	D	H	L	W	T	
Ø12x100	12	100	75	19	8	DIN 571

ANNEX 2

LOADING ACCORDING TO STATIC DIAGRAMS

(for selected elements)

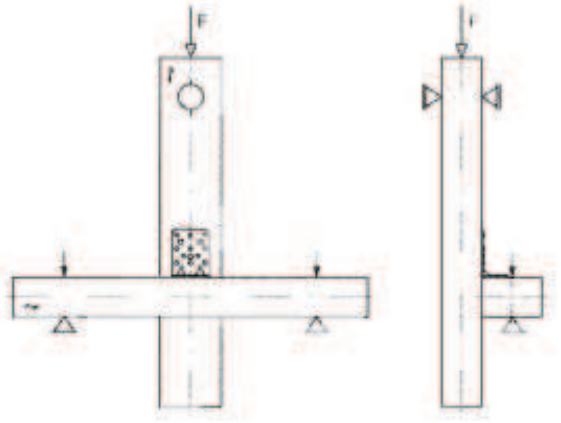
No.	Scheme	Connector types
1		KPK 11, 12, 13, 21, 22, 23 KPL 5, 6, 11, 21 KR 1, 2, 3 KRD 5, 6

Figure 61 Scheme 1

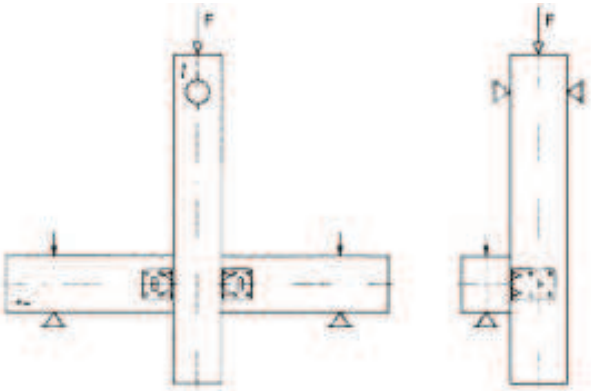
No.	Scheme	Connector types
2		KPK 31 KPK 32 KPK 33

Figure 62 Scheme 2

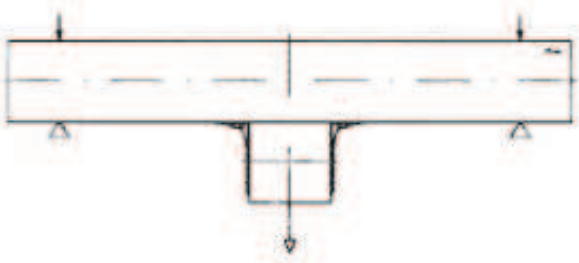
No.	Scheme	Connector types
3		KP 7 KP 8

Figure 63 Scheme 3

No.	Scheme	Connector types
4		KPK 4

Figure 64 Scheme 4

No.	Scheme	Connector types
5		KLR 1 KLR 2 KLR 3 KLR 4 KLR 5 KLR 6

Figure 65 Scheme 5

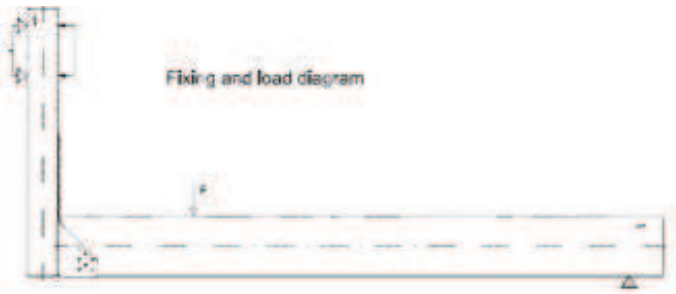
No.	Scheme	Connector types
6		WBC 80 WBC 92 WBC 100 WBC 120 WBC 137

Figure 66 Scheme 6

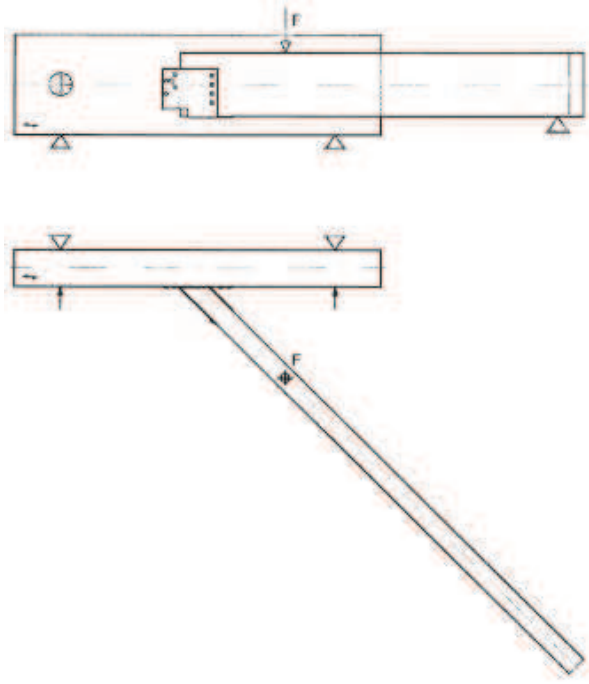
No.	Scheme	Connector types
7		WBU 45 R45-105; L45-105 R50-105; L50-105 R60-120; L60-120

Figure 67 Scheme 7

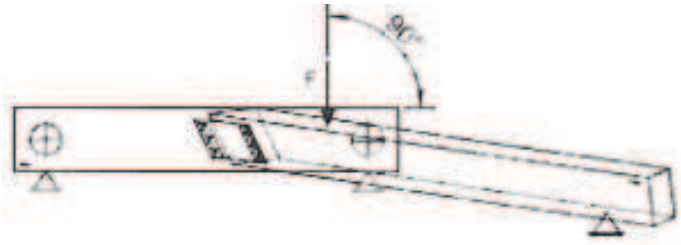
No.	Scheme	Connector types
8		LU 25 R80; L80 R120; L120

Figure 68 Scheme 8

CALCULATIONS ACCORDING TO STATIC DIAGRAMS

(for selected elements)

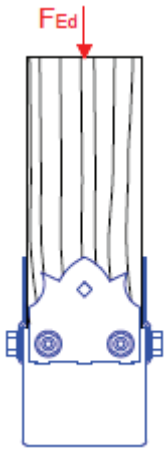
No.	Scheme	Connector types
9		SDP 90 A SDP 100 A SDP 120 A

Figure 69 Scheme 9

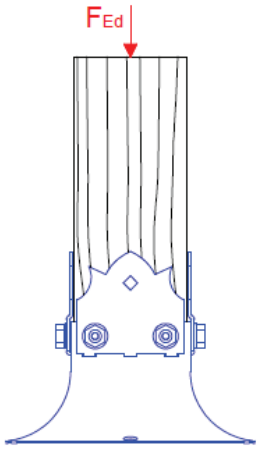
No.	Scheme	Connector types
10		SDP 90 B SDP 100 B SDP 120 B

Figure 70 Scheme 10


No.	Scheme	Connector types
11		SDSP 70 A

Figure 71 Scheme 11

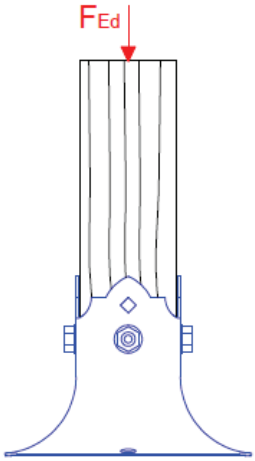
No.	Scheme	Connector types
12		SDSP 70 B

Figure 72 Scheme 12

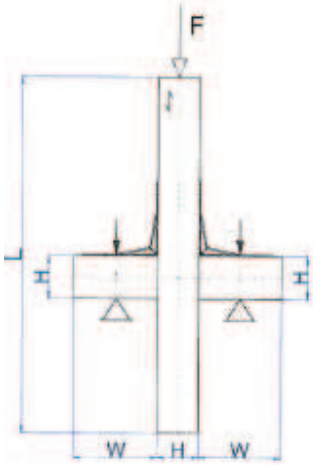
No.	Scheme	Connector types
13		KPS 1 KPS 2 KPS 3 KPS 4

Figure 73 Scheme 13

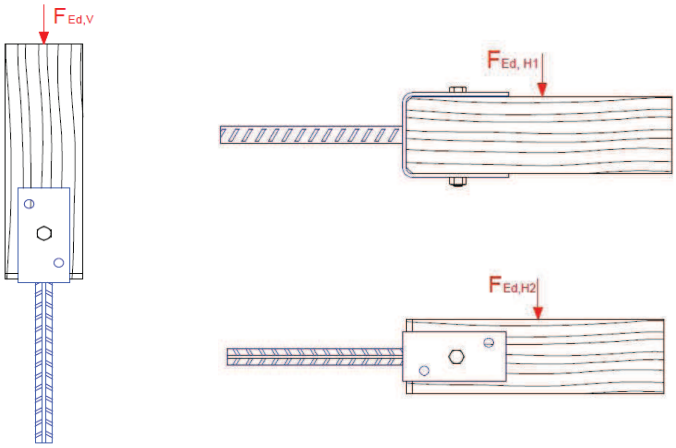
No.	Scheme	Connector types
14		PS 60 PS 70 PS 80 PS 90 PS 100 PS 120 PS 140

Figure 74 Scheme 14

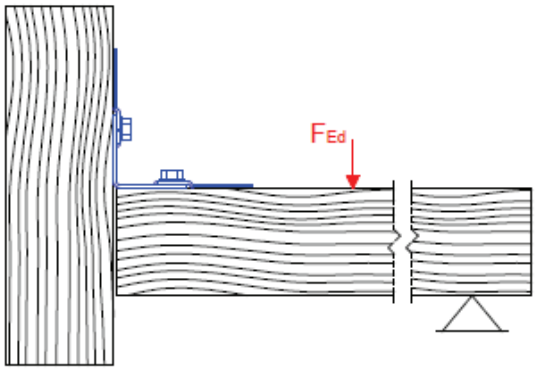
No.	Scheme	Connector types
15		SDKL 1 pull out

Figure 75 Scheme 15

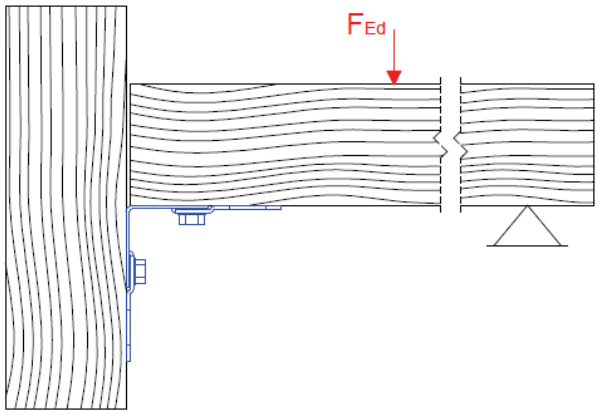
No.	Scheme	Connector types
16		SDKL 1 pressure

Figure 76 Scheme 16

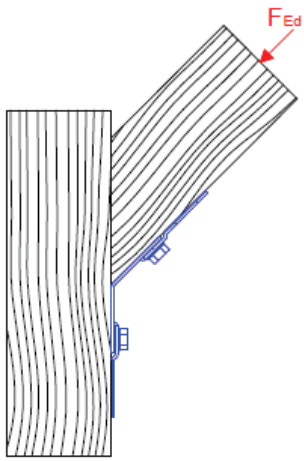
No.	Scheme	Connector types
17		SDKLR 1

Figure 77 Scheme 17

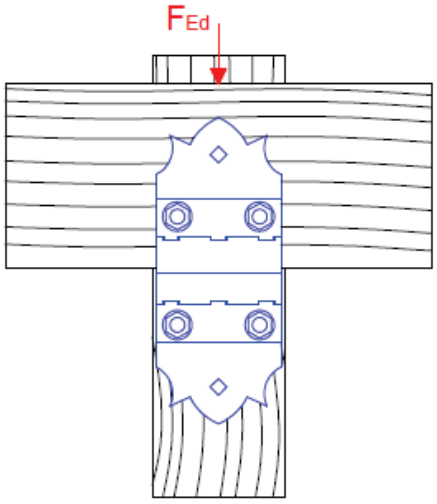
No.	Scheme	Connector types
18		SDLZ 1

Figure 78 Scheme 18

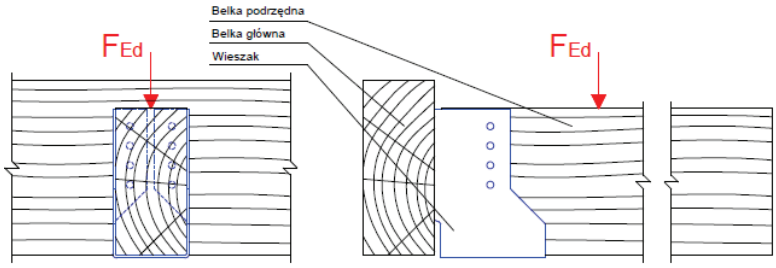
No.	Scheme	Connector types
19		SDSWBZ 10 SDSWBZ 11 SDSWBZ 14 SDSWBZ 21 SDSWBZ 26 SDSWBZ 30

Figure 79 Scheme 19

ANNEX 3

THE CHARACTERISTIC LOAD-CARRYING CAPACITIES OF CONNECTORS

Table 37

Type group	Type	Timber Moisture [%]	Density $\rho_{mean,\ 12\%}$ [kg·m^{-3}]	$P_{max,\ mean}$ [kN]	$P_{max,\ k}$ [kN]	Note No.
KP	KP 7	16.9	428.2	18.34	12.5	1
	KP 8	23.0	411.7	20.62	12.9	1
KPL	KPL 5	15.2	421.2	8.09	6.8	2
	KPL 6	12.9	422.8	9.49	6.2	2
	KPL 11	14.9	452.1	18.43	13.0	2
	KPL 21	15.6	472.7	21.23	17.1	2
KPK	KPK 4	14.3	416.8	15.85	12.7	2
	KPK 11	17.7	460.8	13.00	10.4	2
	KPK 12	14.3	460.9	17.32	13.5	2
	KPK 13	13.4	398.2	22.13	16.7	2
	KPK 21	12.3	468.5	13.53	10.8	2
	KPK 22	11.3	407.5	13.14	10.6	2
	KPK 23	11.3	460.9	12.79	9.0	2
	KPK 31	13.6	436.6	12.44	9.3	3
	KPK 32	12.2	424.8	12.62	10.5	3
	KPK 33	15.4	415.4	13.66	10.5	3
KLR	KLR 1	13.8	422.2	5.71	4.2	2
	KLR 2	15.5	429.7	10.95	7.9	2
	KLR 3	15.5	407.1	10.59	8.3	2
	KLR 4	15.7	468.1	6.35	5.1	2
	KLR 5	15.3	410.8	15.41	13.6	2
	KLR 6	16.0	497.6	9.98	7.2	2
KR	KR 1	13.4	438.8	6.74	5.1	2
	KR 2	14.6	396.2	12.29	6.7	2
	KR 3	14.7	408.7	7.53	6.3	2
WBC	WBC 80	14.7	423.2	42.06	34.9	2
	WBC 92	16.8	424.0	42.79	36.1	2
	WBC 100	14.9	423.6	42.71	26.8	2
	WBC 120	16.7	414.3	47.22	29.2	2
	WBC 137	14.9	428.4	52.44	42.1	2
WBU	WBU 45 R45-105	15.6	385.4	16.96	11.0	2
	WBU 45 R50-105	14.5	387.0	16.43	12.4	2
	WBU 45 R60-120	14.9	423.8	21.47	16.5	2
KRD	KRD 5	16.1	453.8	9.65	6.1	2
	KRD 6	16.1	430.8	8.74	6.1	2
LU	LU 25 R80	14.7	436.5	9.07	6.1	2
	LU 25 R120	14.6	414.5	14.76	12.3	2

Notes:
1 Given forces are per one connector (one angle bracket), the test connections consisted of two connectors, forces for the complete connections are twice as high
2 One connector
3 The forces are given for the complete connection consisting of two connectors, hence force per one connector (one angle bracket) is half of the given value

THE CHARACTERISTIC LOAD-CARRYING CAPACITIES OF JOINTS (LOADING)

Table 38

Type group	Type	Timber Moisture [%]	Density $\rho_{mean,\ 12\%}$ [kg·m^{-3}]	$P_{max,\ mean}$ [kN]	$P_{max,\ k}$ [kN]	Note No.
ŁB	ŁB 1	12.0	400.1	13.41	9.9	1
	ŁB 2	12.0	400.1	15.27	10.4	1
	ŁB 4	12.0	400.1	12.73	9.4	1
NT	NT 25			25.26	15.7	2
	NT 40			37.14	32.8	2
	NT 60			67.62	59.8	2
KKB	KKB 1	12.0	400.0	81.14	57.6	3

Notes:
1 Given forces are for one connector, the test connections consisted of two connectors, hence the force for the complete connection is twice the given
2 One connector loaded in tension
3 Given forces are for the complete connection, the test connections consisted of two connectors, hence force for one connector is half of the given

THE CHARACTERISTIC LOAD-CARRYING CAPACITIES OF JOINTS (CALCULATIONS)

Table 39

Type of connector	Load	Bearing Capacity [kN]		Method of determination	Document No.
		Timber	Steel		
SDLZ 1	shear	3.6		calculation	KAO-O-SOD-13
SDKLR 1	oblique	3.3		calculation	KAO-O-SOD-12
SDKL 1	pull out		1.1	calculation	KAO-O-SOD-10
	pressure	3.3		calculation	KAO-O-SOD-11
SDSP 70 A	pressure	34.8		calculation	KAO-O-SOD-23
SDSP 70 B	pressure	108.6		calculation	KAO-O-SOD-24
SDP 90 A	pressure	39.6		calculation	KAO-O-SOD-15
SDP 90 B	pressure	180.6		calculation	KAO-O-SOD-17
SDP 100 A	pressure	39.6		calculation	KAO-O-SOD-15
SDP 100 B	pressure	220.5		calculation	KAO-O-SOD-17
SDP 120 A	pressure	39.6		calculation	KAO-O-SOD-15
SDP 120 B	pressure	312.9		calculation	KAO-O-SOD-17
SDSKW 2	pressure	3.3		testing	KAO-O-SOD-21
SDSKW 8	pressure	3.5		testing	KAO-O-SOD-22
SDSKP 1	pressure	17.8		testing	KAO-O-SOD-21
SDSKP 5	pressure	10.9		testing	KAO-O-SOD-21
SDSKM 7	pressure	5.8		testing	KAO-O-SOD-21
SDSWBZ 10	pressure	9.6		calculation	KAO-O-SOD-18
SDSWBZ 11	pressure	12.3		calculation	KAO-O-SOD-19
SDSWBZ 14	pressure	9.3		calculation	KAO-O-SOD-20
SDSWBZ 21	pressure	17.2		testing	KAO-O-SOD-21
SDSWBZ 26	pressure	17.2		testing	KAO-O-SOD-21
SDSWBZ 30	pressure	22.4		testing	KAO-O-SOD-21

THE CHARACTERISTIC LOAD-CARRYING CAPACITIES OF JOINTS (CALCULATIONS)

Table 40

Type of connector	Characteristic bearing capacity [kN]	Document No.
	Timber	
PS 60	4.1	BPS-0001/13
PS 70	4.3	BPS-0002/13
PS 80	6.9	BPS-0003/13
PS 90	6.2	BPS-0004/13
PS 100	6.7	BPS-0005/13
PS 120	8.2	BPS-0006/13
PS 140	7.5	BPS-0007/13
KPS 1	16.3	KE1-0009/14
KPS 2	18.7	KE1-0010/14
KPS 3	12.6	KE1-0011/14
KPS 4	11.6	KE1-0012/14

Table 41 Overview of bearing capacities of connector type PS [kN]

Type of connector	Bearing capacity $N_{Rd,V}$ [kN] (calculation)		Bearing capacity $N_{Rd,H1}$ [kN] (calculation)		Bearing capacity $N_{Rd,H2}$ [kN] (testing)
	Bearing capacity of timber	Bearing capacity of steel	Bearing capacity of timber	Bearing capacity of steel	
PS 60	61.7	51.7	12.2	6.9	4.7
PS 70	86.6	51.7	12.2	6.9	4.4
PS 80	99.2	57.3	12.2	9.6	7.7
PS 90	111.8	57.3	12.2	9.6	6.8
PS 100	124.4	57.3	12.2	9.6	7
PS 120	149.6	57.3	12.2	9.6	9.1
PS 140	174.8	57.3	12.2	9.6	7.8

$N_{Rd,V}$ - Vertical load force, $N_{Rd,H1}$ - Horizontal load force, $N_{Rd,H2}$ - Vertical load force parallel to the side of base
Document No.: KAO-L-PS-01

For combinations of loads ($F_{Ed,V}$, $F_{Ed,H1}$, $F_{Ed,H2}$) a linear summation of the utilization ratios may be used. This method may be applied by using a following criteria:

$$\frac{F_{Ed,V}}{N_{Rd,V}} + \frac{F_{Ed,H1}}{N_{Rd,H1}} + \frac{F_{Ed,H2}}{N_{Rd,H2}} \leq 1$$

ANNEX 4

NAILING PATTERNS

It is always necessary to put nails in the black marked holes. This is the only one proper pattern because too many or too long nails can weaken the wood, it's quite close to edge (rule is stated below).

If t>60 [mm]
Then $0.5*t \geq t_1 \geq 0.35*t$

If t≤60 [mm]
Then $0.9*t \geq t_1 \geq 0.7*t$

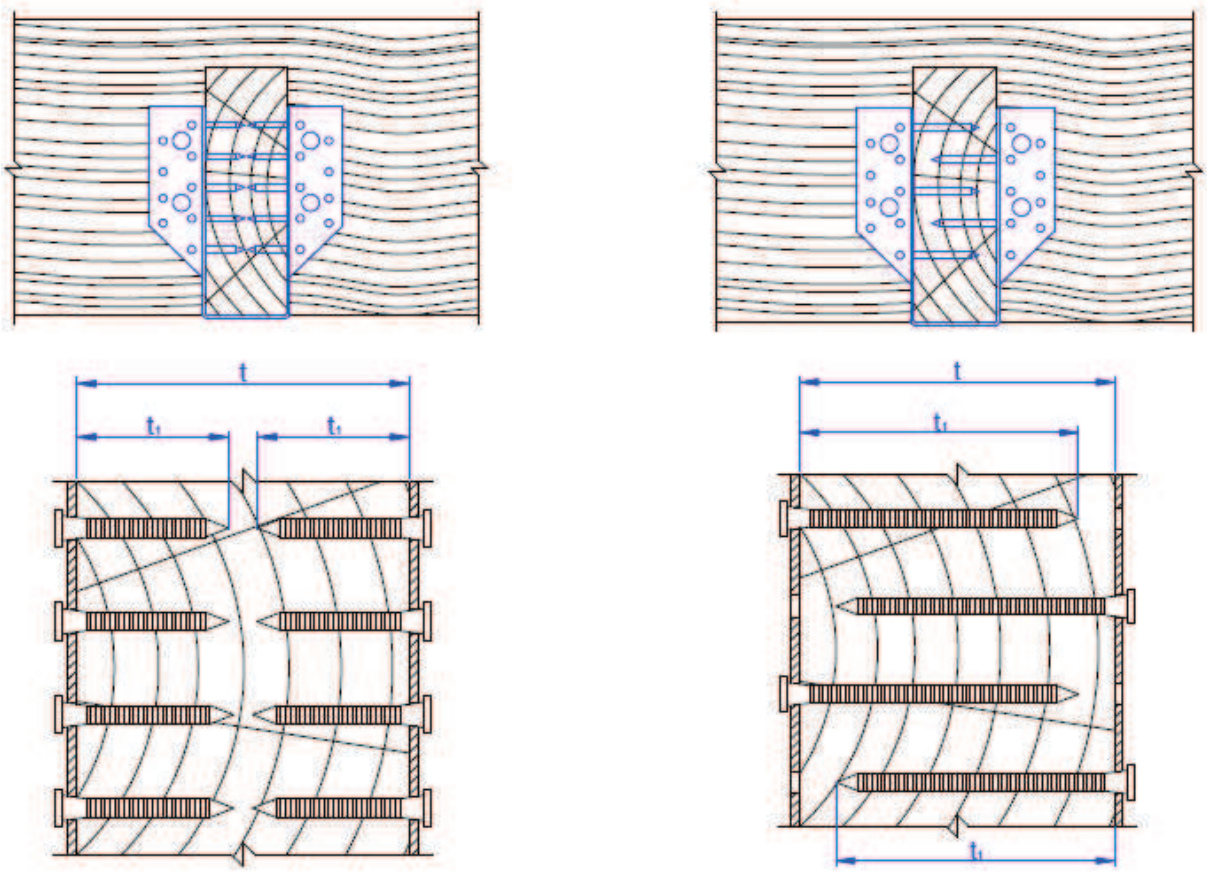


Figure 80 Rule for placement nails

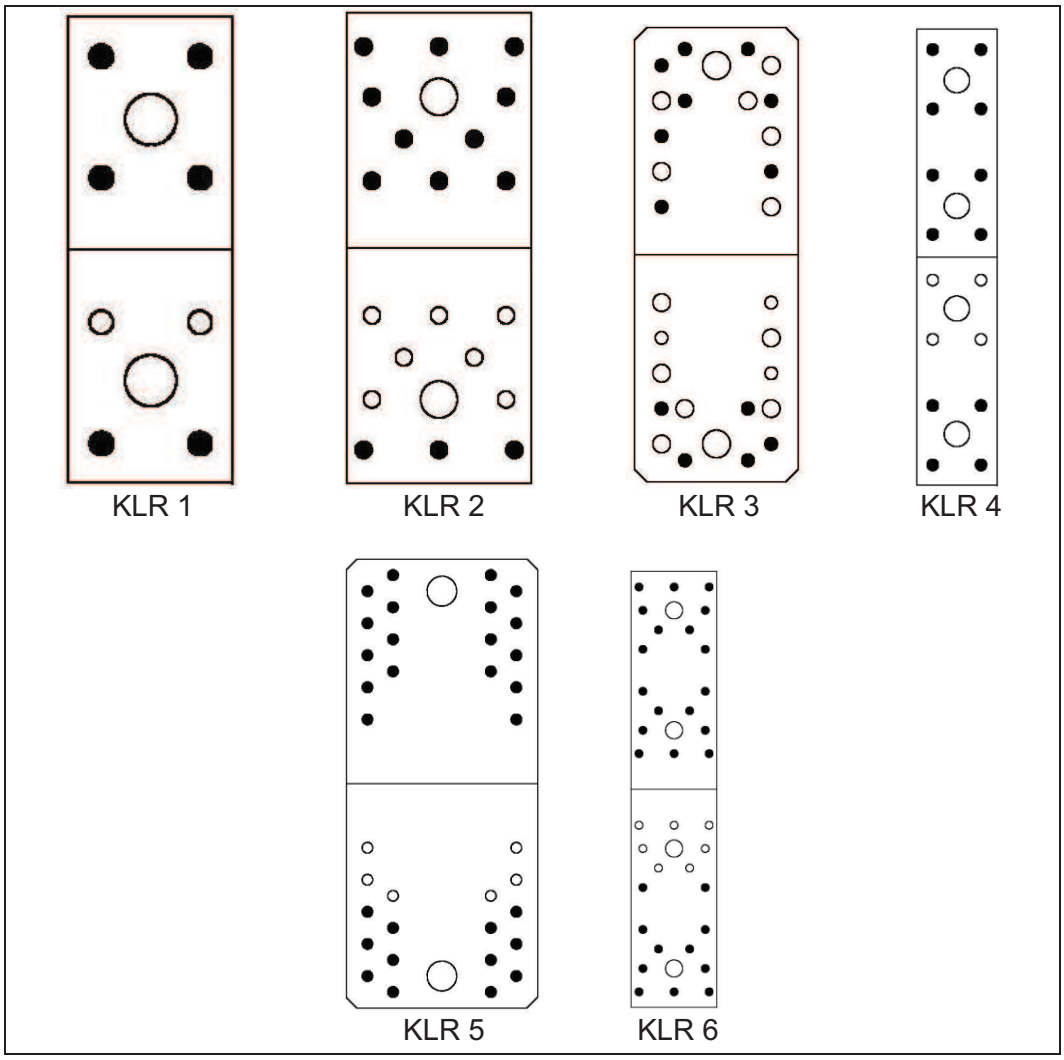


Figure 81 Type KLR

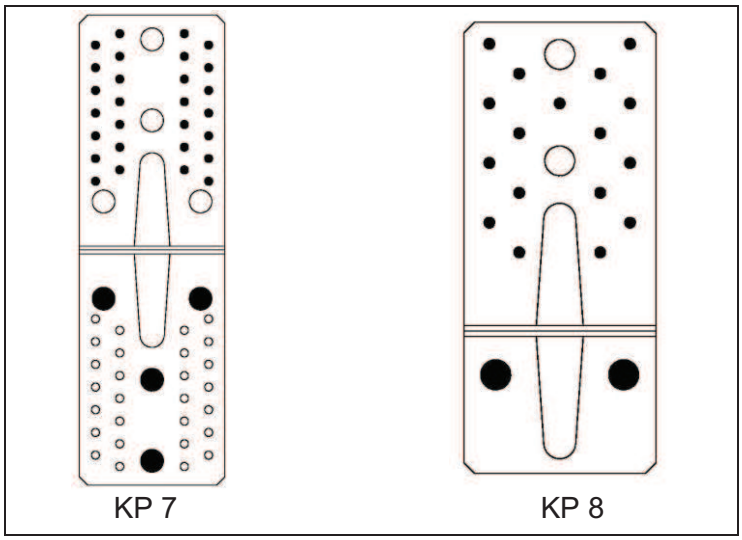


Figure 82 Type KP

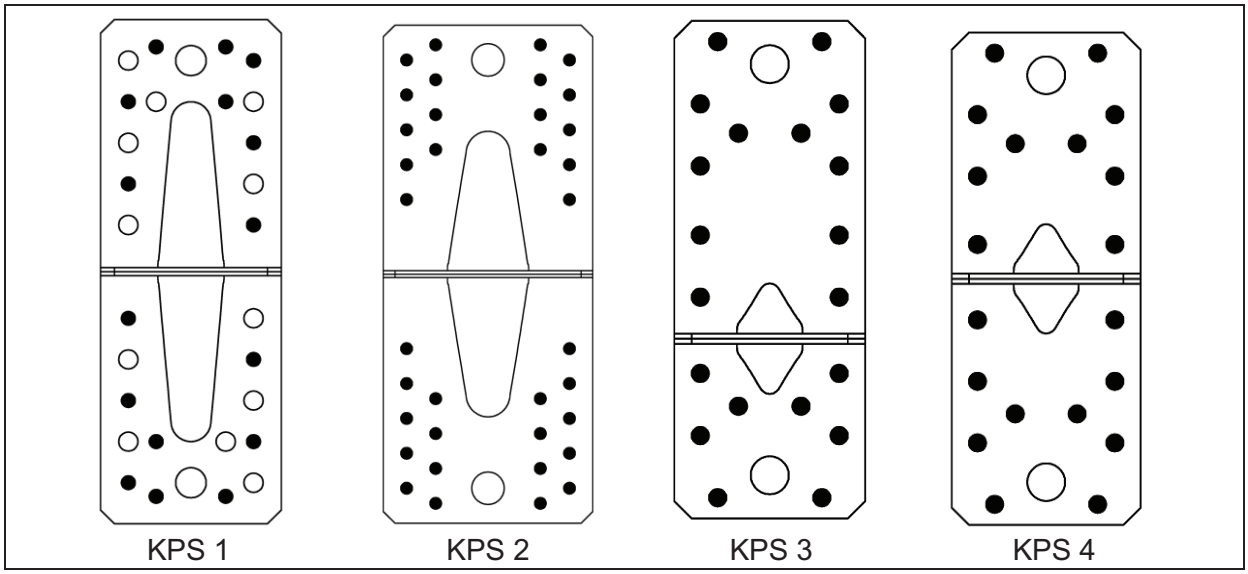


Figure 83 Type KPS

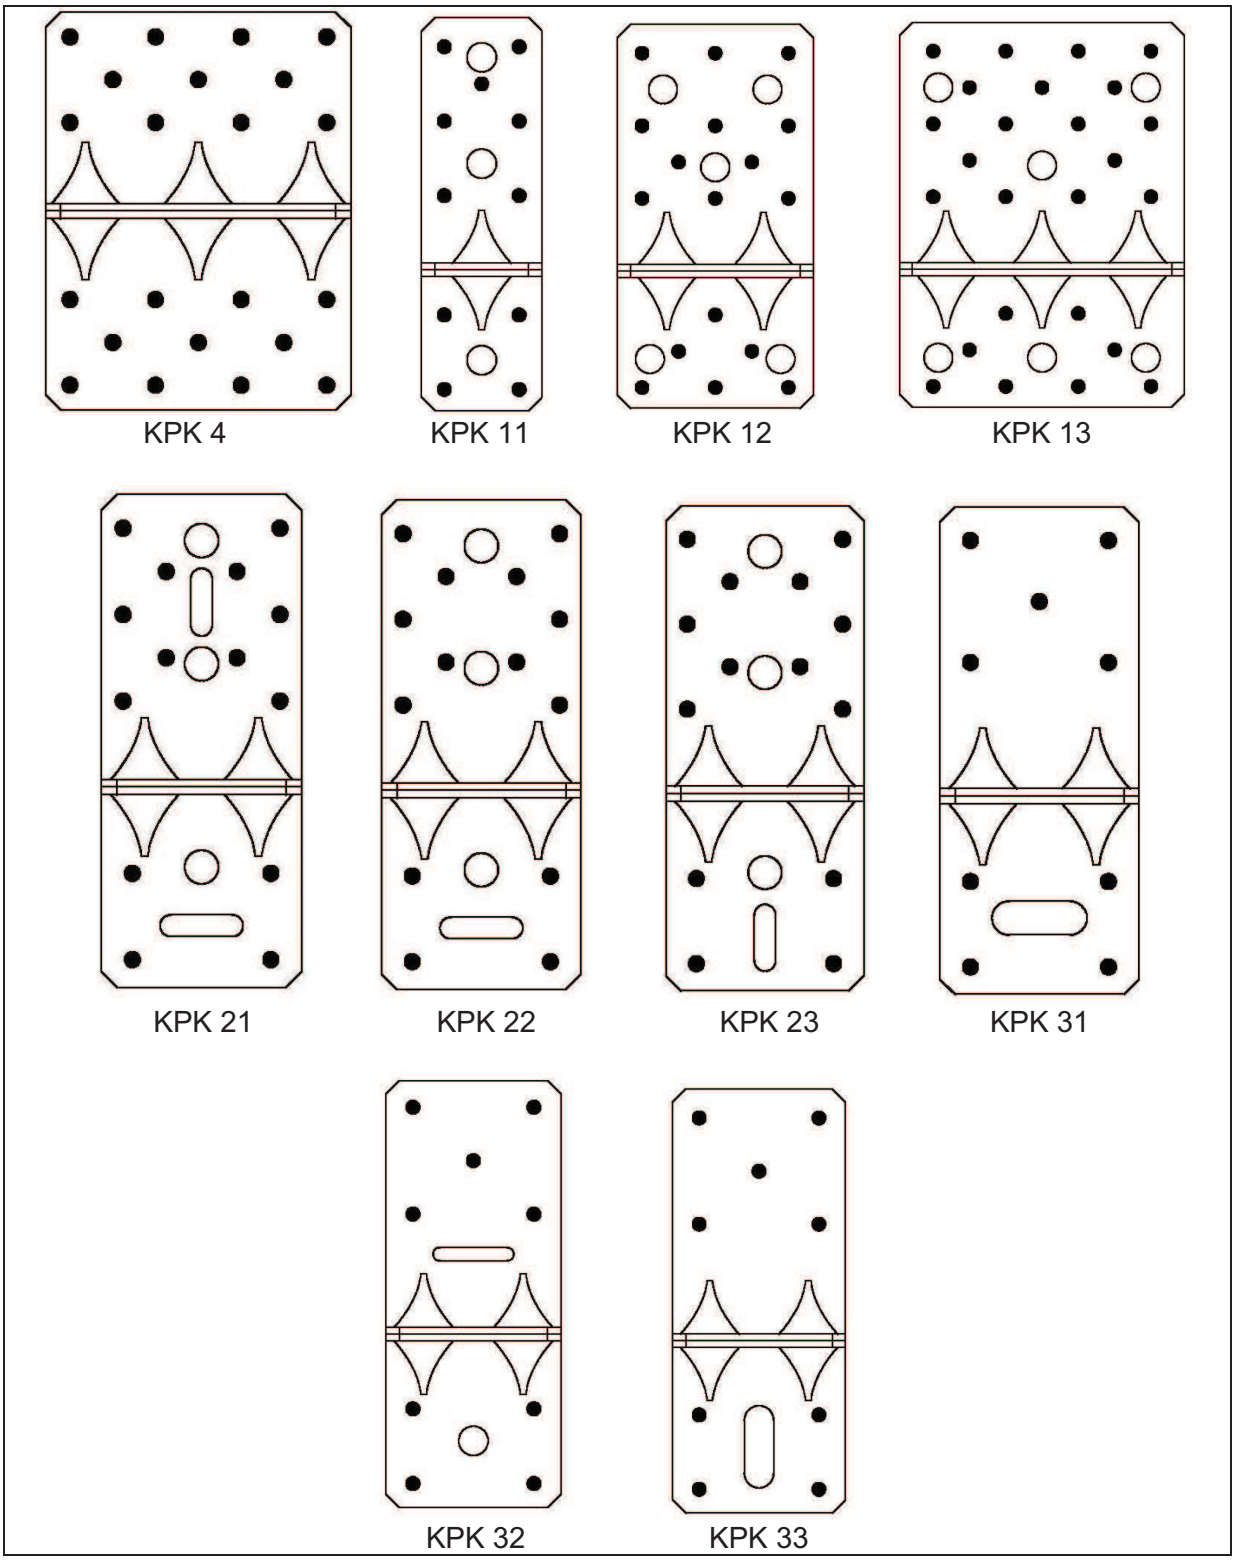


Figure 84 Type KPK

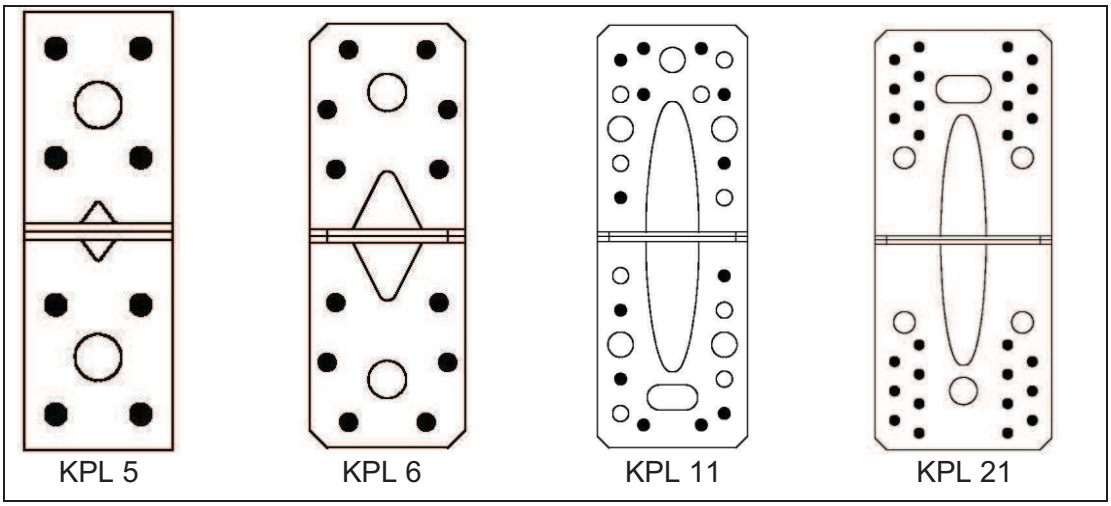


Figure 85 Type KPL

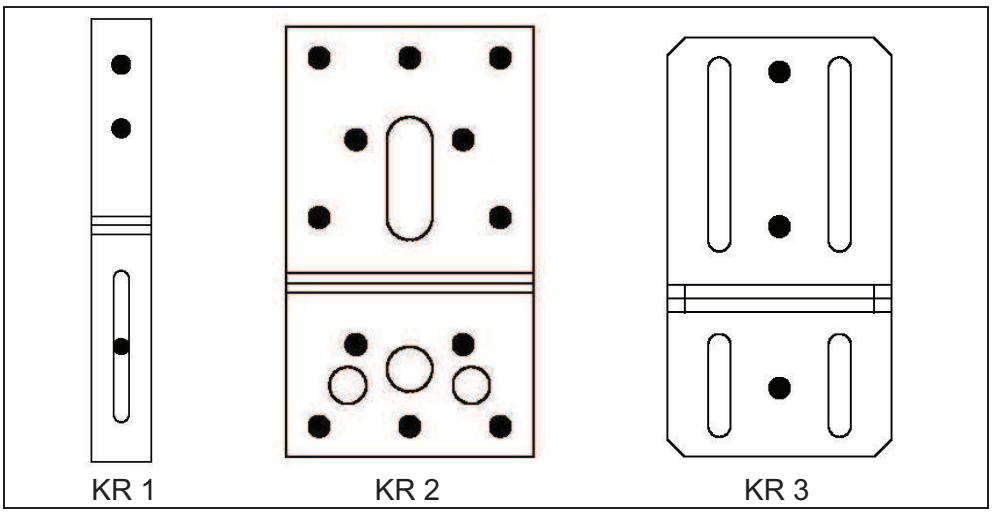


Figure 86 Type KR

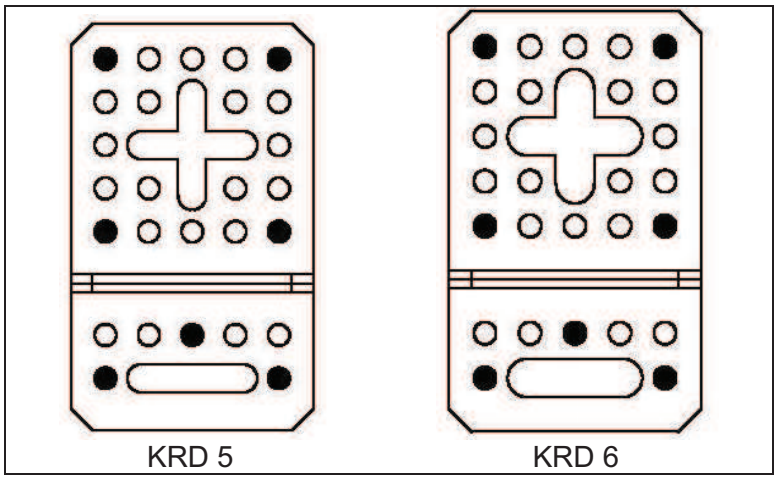


Figure 87 Type KRD

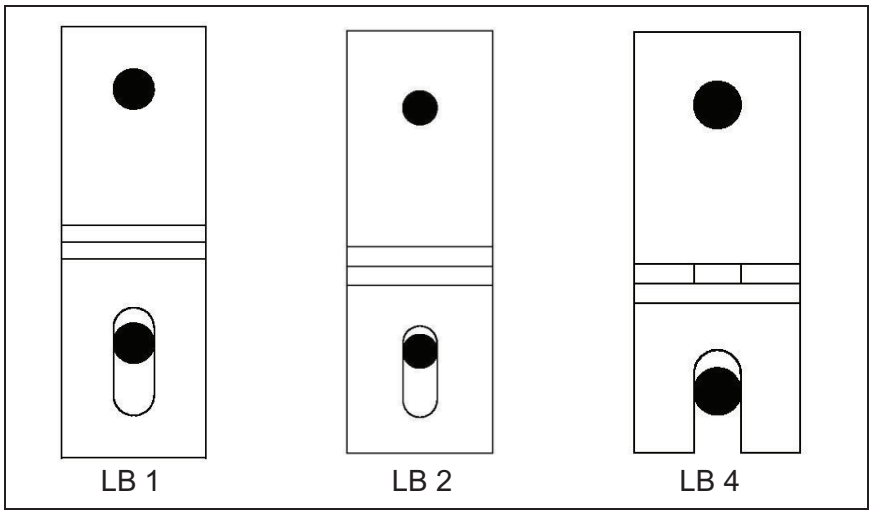


Figure 88 Type LB

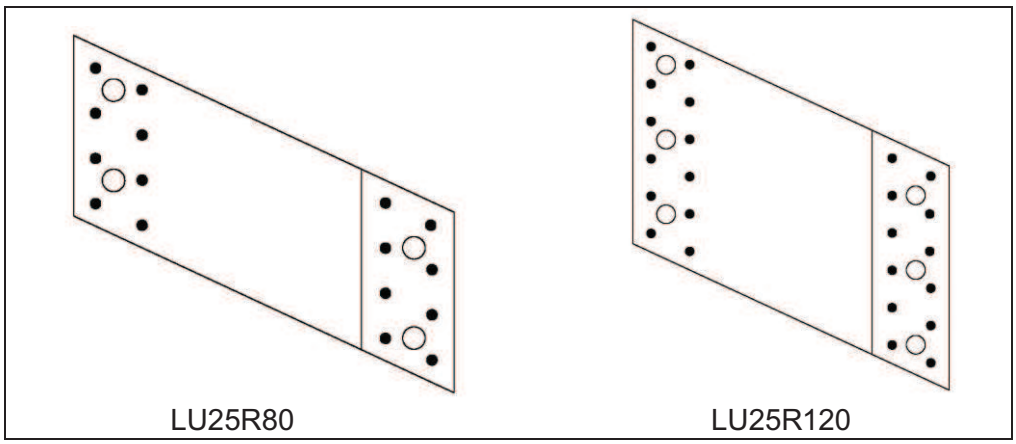


Figure 89 Type LU

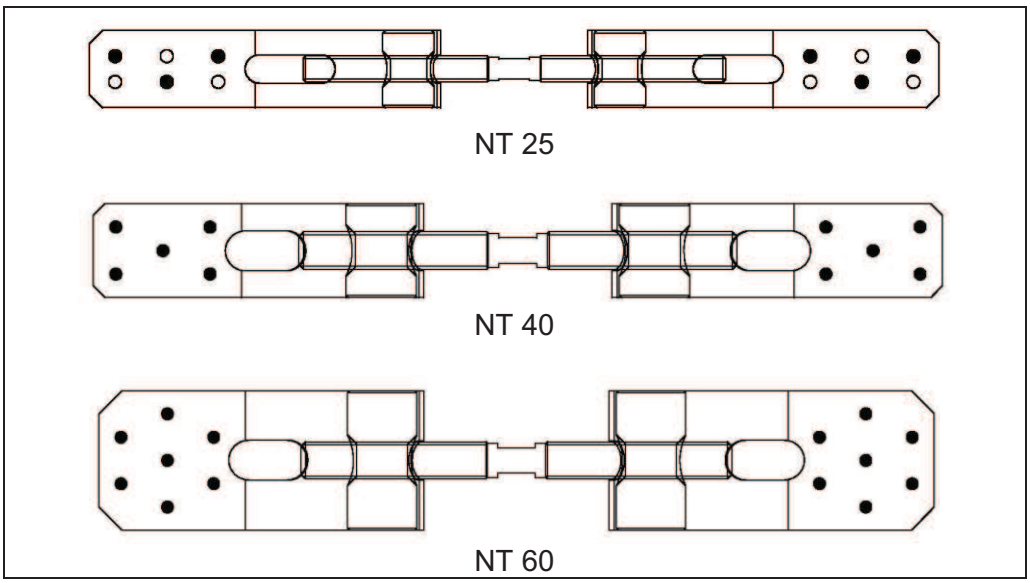


Figure 90 Type NT

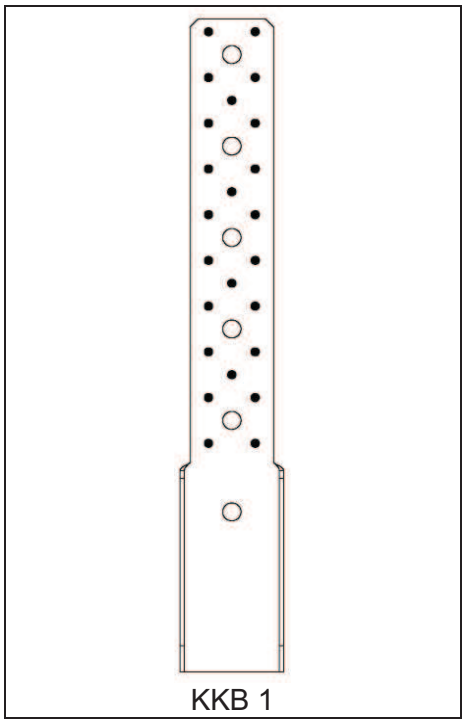


Figure 91 Type KKB

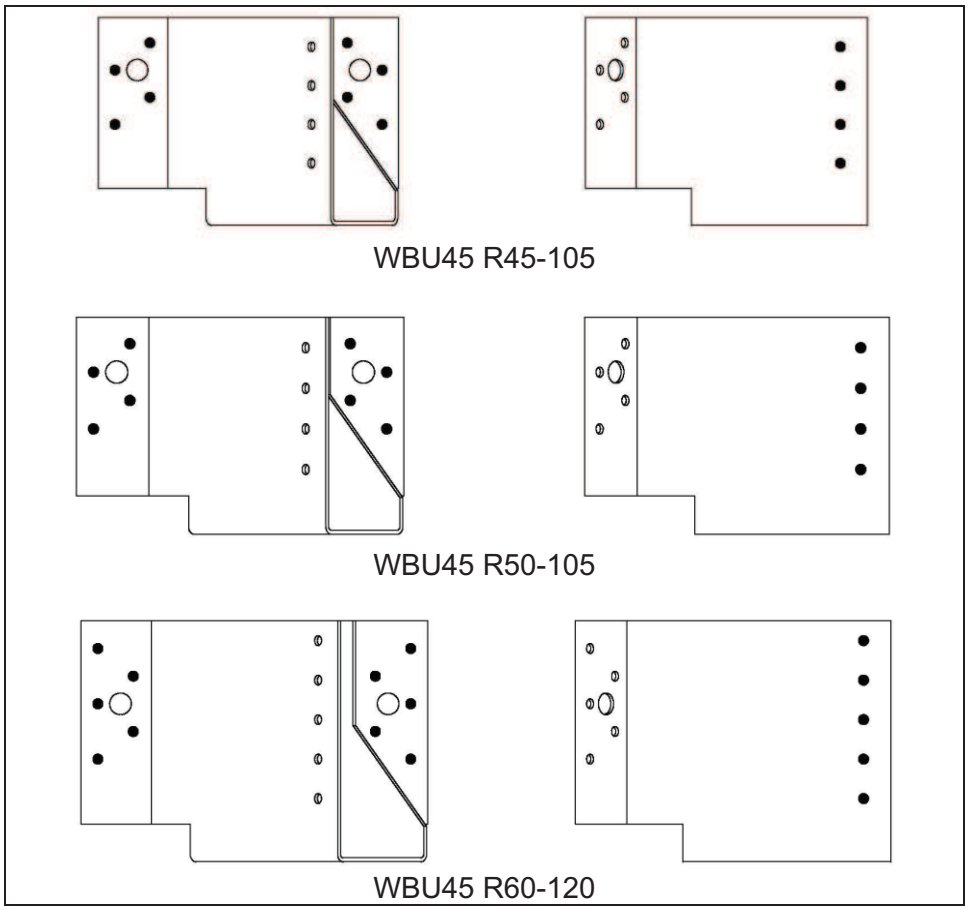


Figure 92 Type WBU

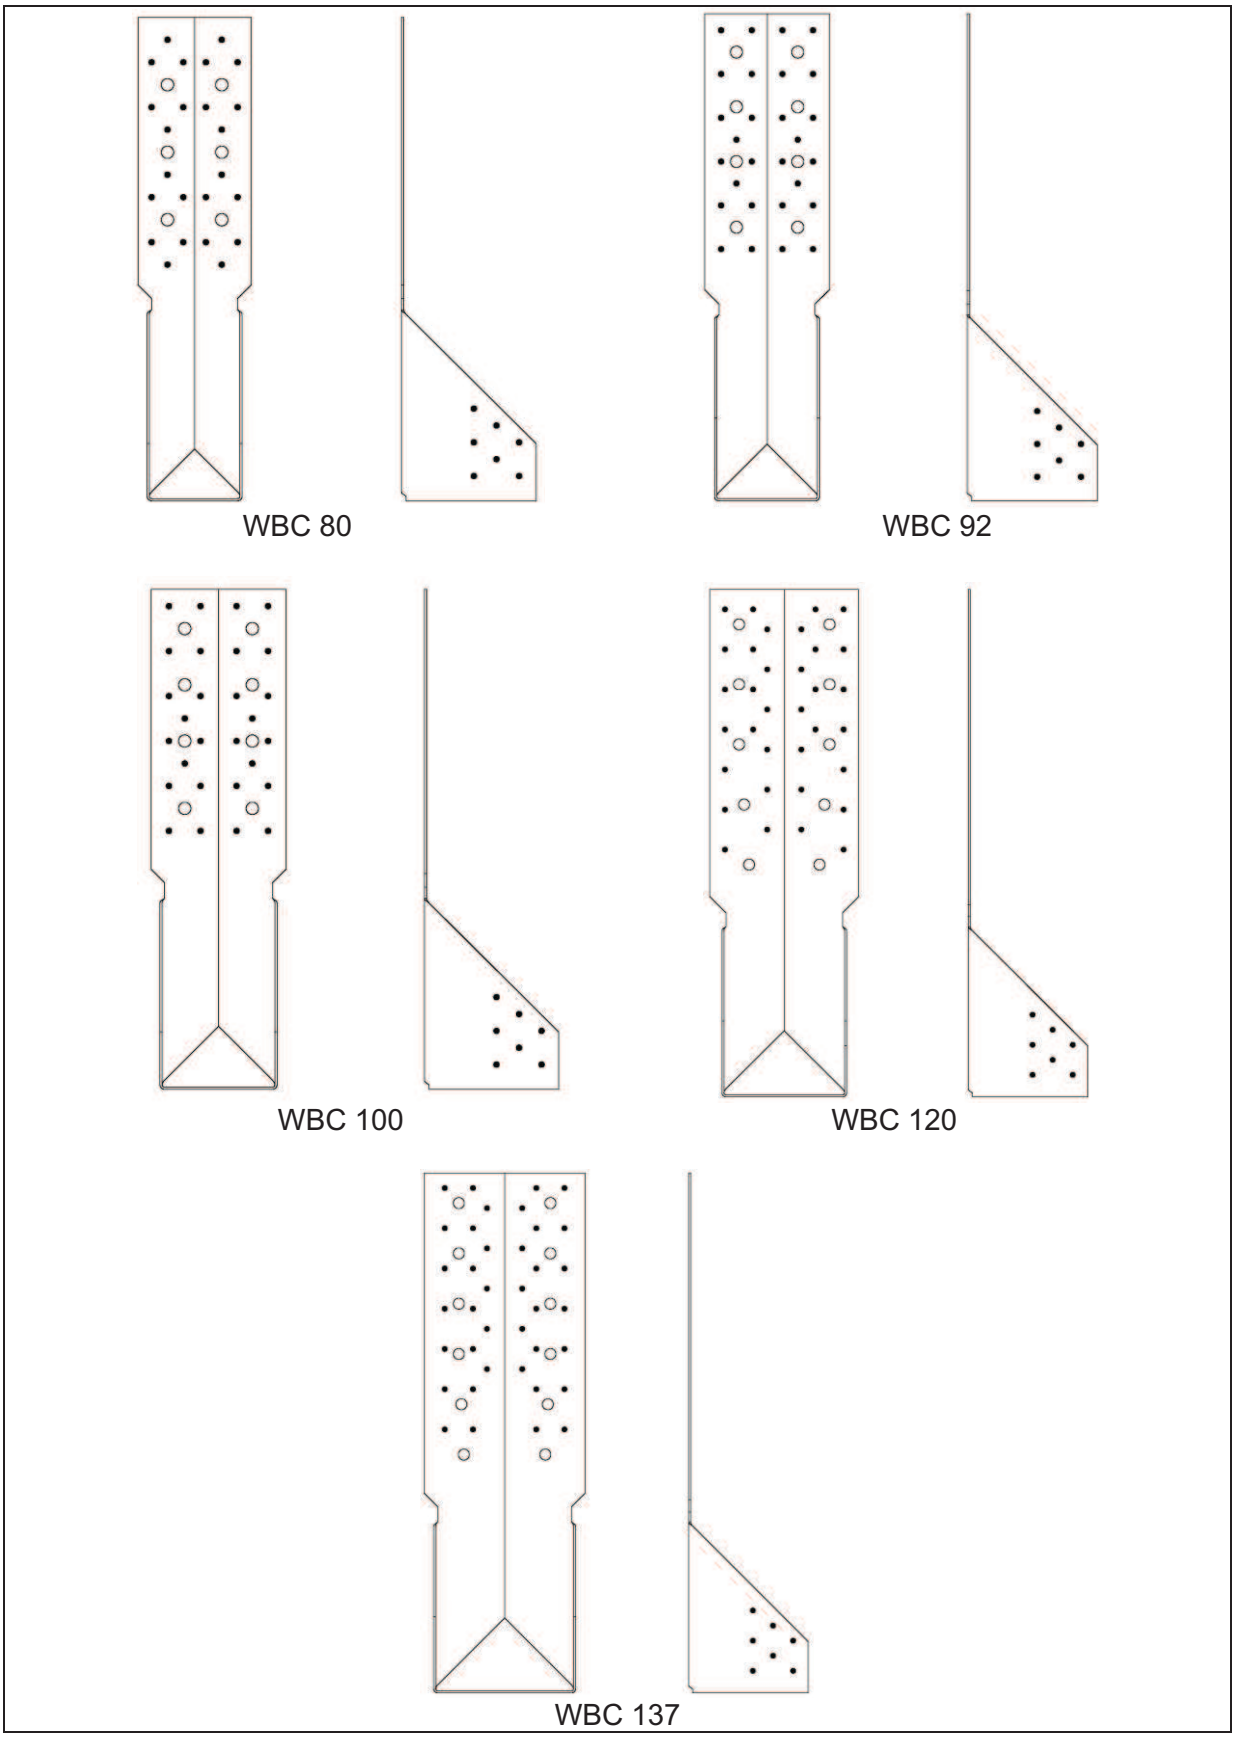


Figure 93 Type WBC

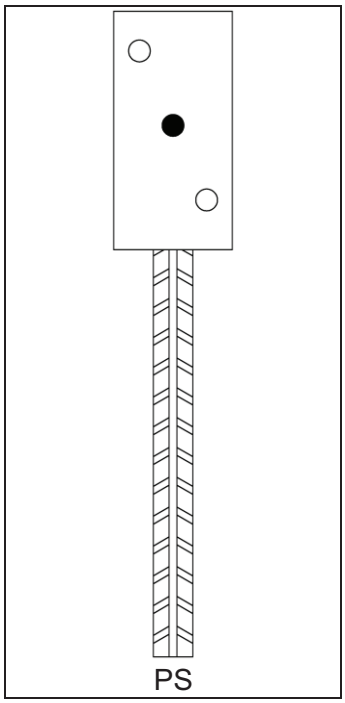
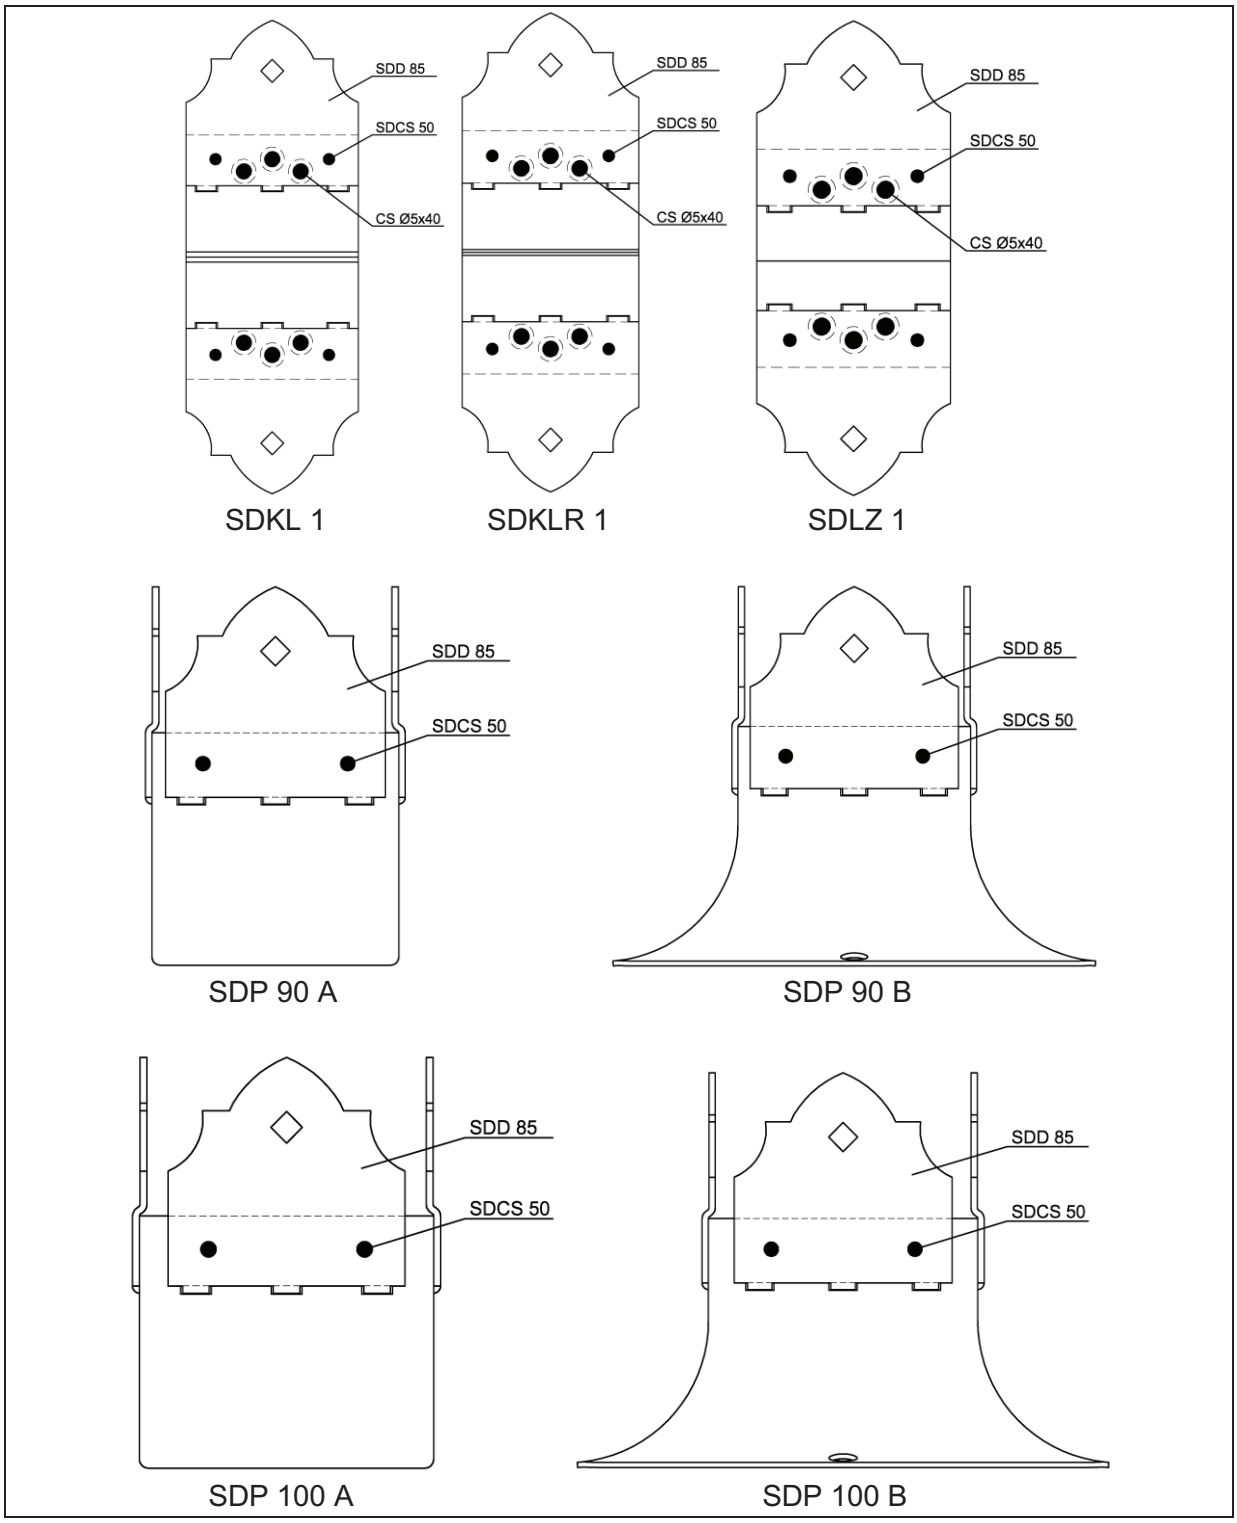


Figure 94 Type PS


SDD 85
SDCS 50
CS Ø5x40
SDKL 1
SDD 85
SDCS 50
CS Ø5x40
SDKLR 1
SDD 85
SDCS 50
CS Ø5x40
SDLZ 1
SDD 85
SDCS 50
SDP 90 A
SDD 85
SDCS 50
SDP 90 B
SDD 85
SDCS 50
SDP 100 A
SDD 85
SDCS 50
SDP 100 B




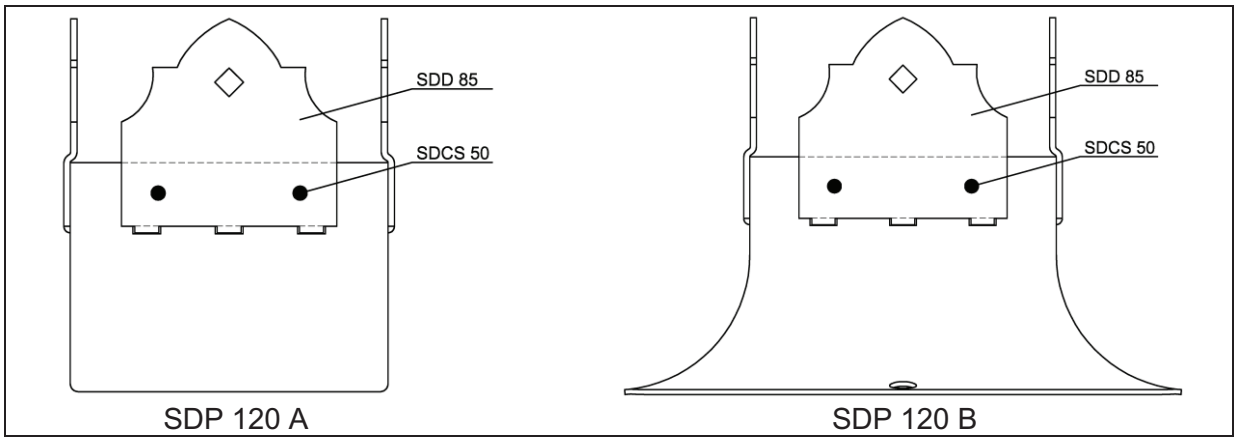


Figure 95 Type SD

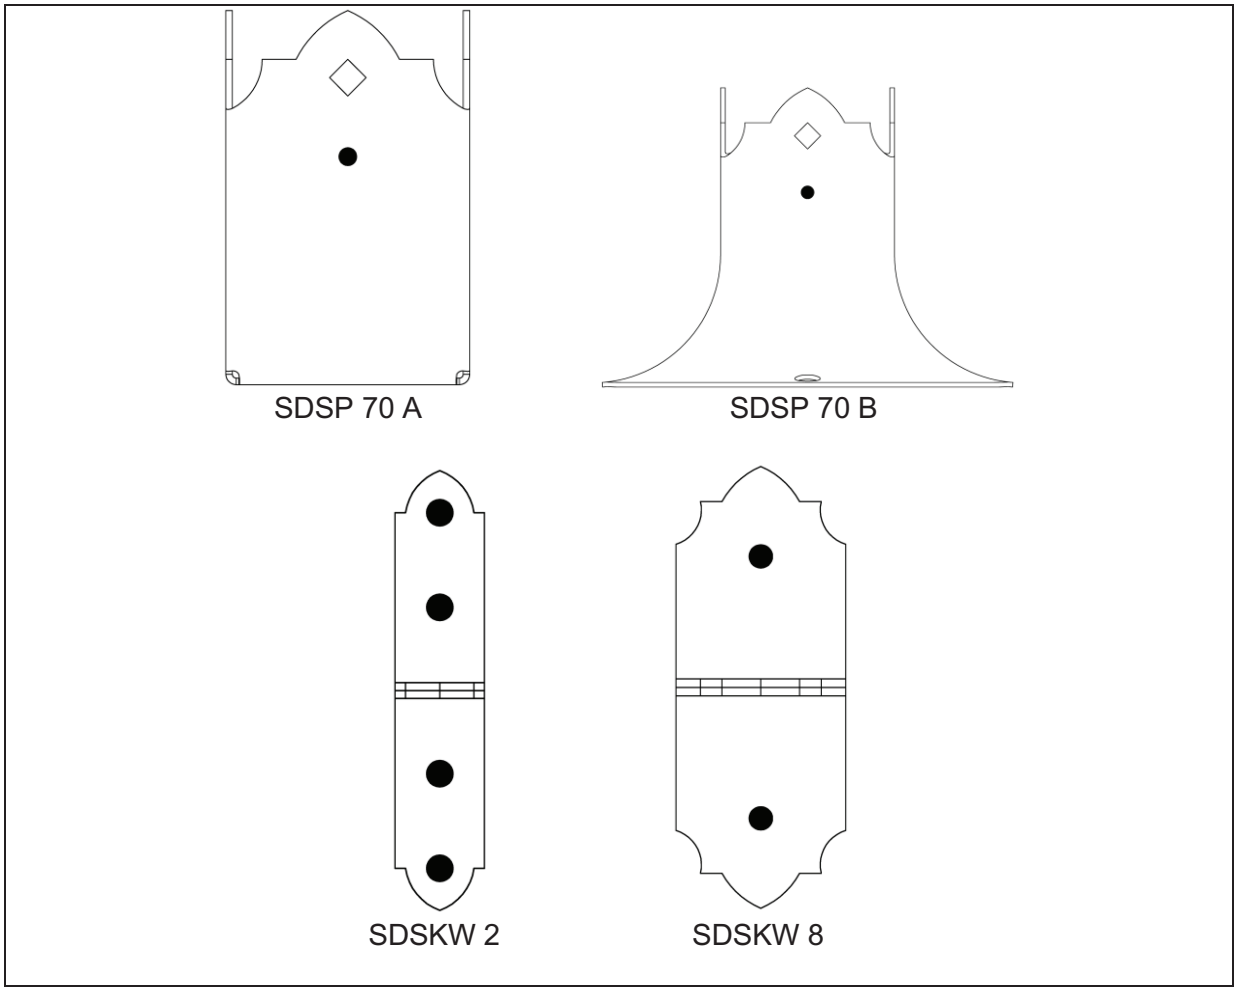


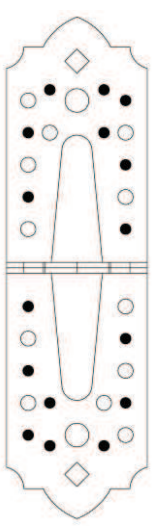


SDSKP 1




SDSKP 5




SDSKM 7

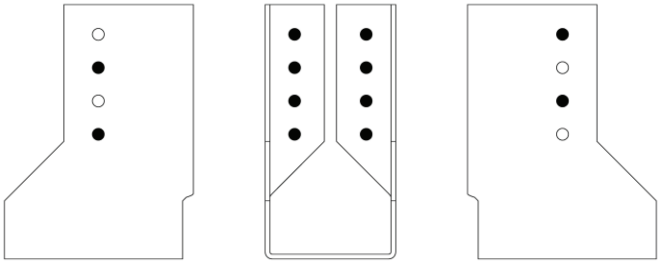

SDSWBZ 10

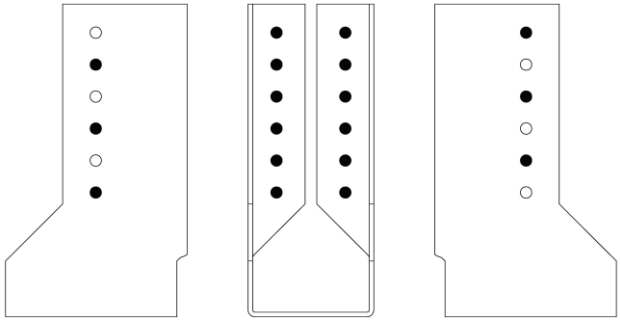

SDSWBZ 11

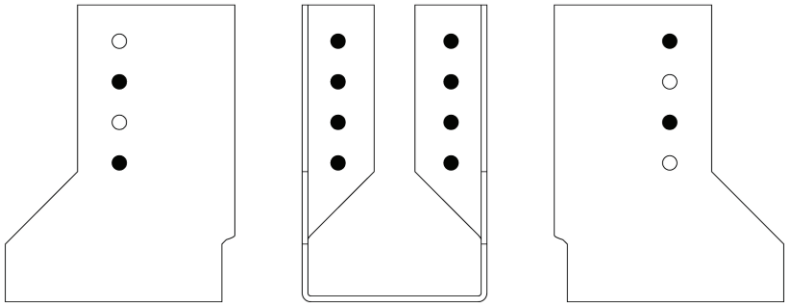

SDSWBZ 14

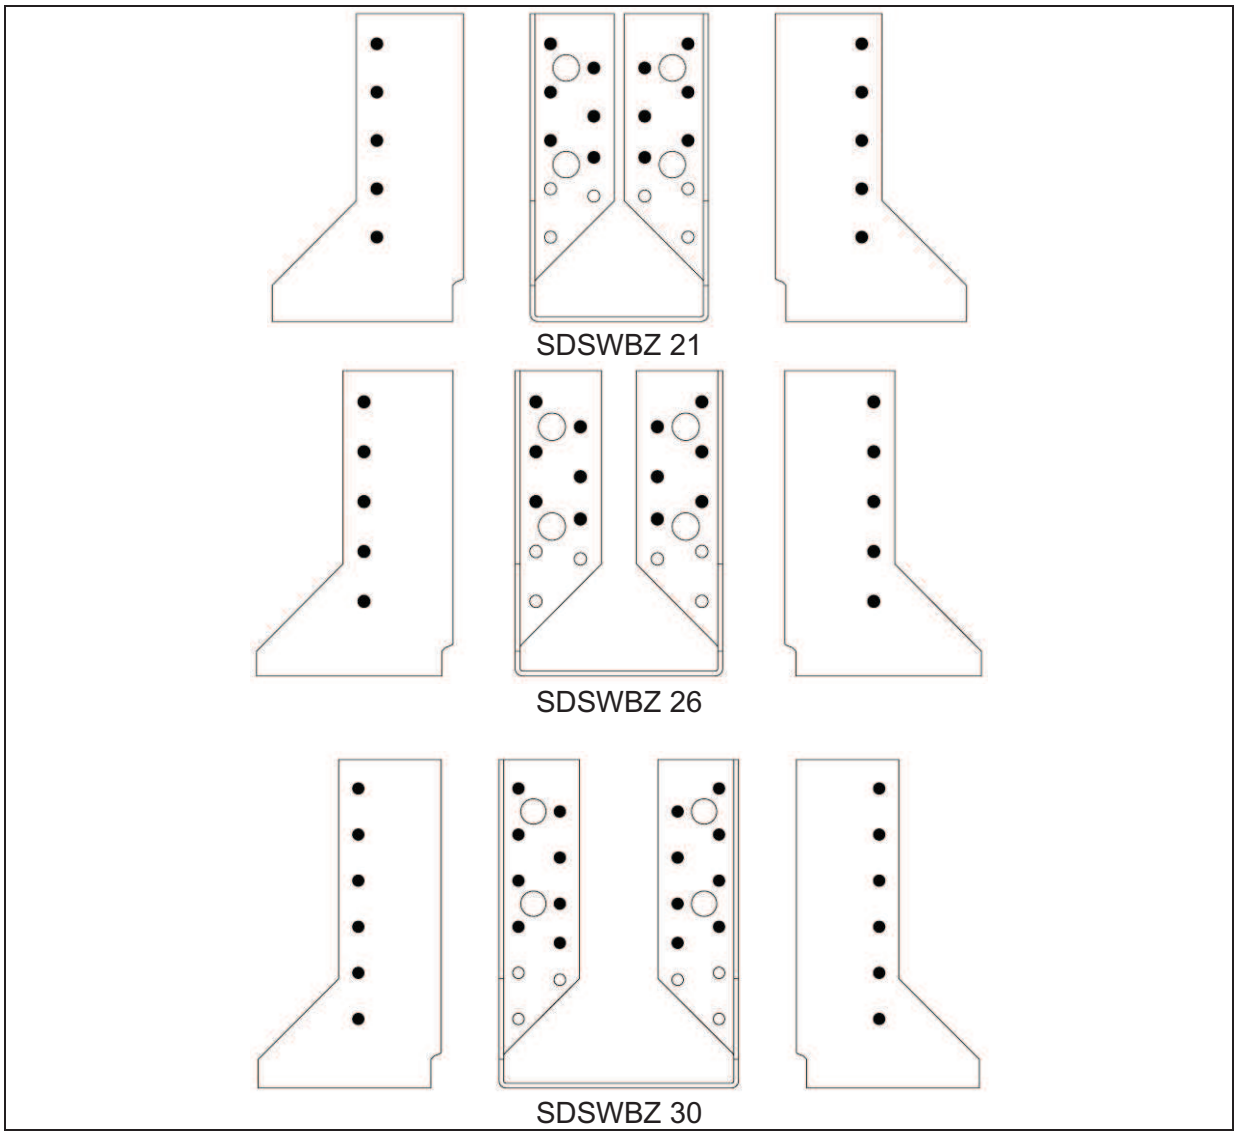


Figure 96 Type SDS

ANNEX 5

SPECIFICATION OF CONNECTION ELEMENTS

Table 42

Detail	Dowel type connectors	Connectors/Detail [pc.]	Connectors/Connection [pc.]
KLR 1	ANCHOR ø 4x50	6	6
KLR 2	ANCHOR ø 4x50	13	13
KLR 3	ANCHOR ø 4x50	13	13
KLR 4	ANCHOR ø 4x50	12	12
KLR 5	ANCHOR ø 4x50	30	30
KLR 6	ANCHOR ø 4x50	29	29
KP 7	ANCHOR ø 4x50 / DIN 571 ø12x100	28 / 4	56 / 8
KP 8	ANCHOR ø 4x50 / DIN 571 ø 12x100	17 / 2	34 / 4
KPK 4	ANCHOR ø 4x50	22	22
KPK 11	ANCHOR ø 4x50	11	11
KPK 12	ANCHOR ø 4x50	17	17
KPK 13	ANCHOR ø 4x50	25	25
KPK 21	ANCHOR ø 4x50	14	14
KPK 22	ANCHOR ø 4x50	14	14
KPK 23	ANCHOR ø 4x50	14	14
KPK 31	ANCHOR ø 4x50	9	18
KPK 32	ANCHOR ø 4x50	9	18
KPK 33	ANCHOR ø 4x50	9	18
KPL 5	ANCHOR ø 4x50	8	8
KPL 6	ANCHOR ø 4x50	12	12
KPL 11	ANCHOR ø 4x50	13	13
KPL 21	ANCHOR ø 4x50	28	28
KR 1	ANCHOR ø 4x50	3	3
KR 2	ANCHOR ø 4x50	12	12
KP 3	ANCHOR ø 4x50	3	3
KRD 5	ANCHOR ø 4x50	7	7
KRD 6	ANCHOR ø 4x50	7	7
SDLZ 1	SDCS 50 / CS ø 5x40	4 / 6	4 / 6
SDKLR 1	SDCS 50 / CS ø 5x40	4 / 6	4 / 6
SDKL 1	SDCS 50 / CS ø 5x40	4 / 6	4 / 6
SDSP 70 A	SDCS 50	4	4
SDSP 70 B	SDCS 50	4	4
SDP 90 A	SDCS 50	8	8
SDP 90 B	SDCS 50	8	8
SDP 100 A	SDCS 50	8	8
SDP 100 B	SDCS 50	8	8
SDP 120 A	SDCS 50	8	8
SDP 120 B	SDCS 50	8	8

Detail	Dowel type connectors	Connectors/Detail [pc.]	Connectors/Connection [pc.]
SDSKW 2	ANCHOR ø 4x50	4	8
SDSKW 8	SDCS 50	2	4
SDSKP 1	ANCHOR ø 4x50	16	32
SDSKP 5	ANCHOR ø 4x50	18	36
SDSKM 7	ANCHOR ø 4x50	12	24
SDSWBZ 10	ANCHOR ø 4x50 / ANCHOR ø 4x40	8 / 4	8 / 4
SDSWBZ 11	ANCHOR ø 4x50 / ANCHOR ø 4x40	12 / 6	12 / 6
SDSWBZ 14	ANCHOR ø 4x50 / ANCHOR ø 4x40	8 / 4	8 / 4
SDSWBZ 21	ANCHOR ø 4x50 / ANCHOR ø 4x40	12 / 10	12 / 10
SDSWBZ 26	ANCHOR ø 4x50 / ANCHOR ø 4x40	12 / 10	12 / 10
SDSWBZ 30	ANCHOR ø 4x50 / ANCHOR ø 4x40	16 / 12	16 / 12
PS 60	ISO 4014 M10x80-5.8	1	1
PS 70	ISO 4014 M10x90-5.8	1	1
PS 80	ISO 4014 M10x100-5.8	1	1
PS 90	ISO 4014 M10x110-5.8	1	1
PS 100	ISO 4014 M10x120-5.8	1	1
PS 120	ISO 4014 M10x140-5.8	1	1
PS 140	ISO 4014 M10x160-5.8	1	1
LU25 R80 (L80)	ANCHOR ø 4x50	16	16
LU25 R120 (L120)	ANCHOR ø 4x50	24	24
WBC 80	ANCHOR ø 4x50 / ANCHOR ø 4x40	24 / 14	24 / 14
WBC 92	ANCHOR ø 4x50 / ANCHOR ø 4x40	28 / 14	28 / 14
WBC 100	ANCHOR ø 4x50 / ANCHOR ø 4x40	28 / 14	28 / 14
WBC 120	ANCHOR ø 4x50 / ANCHOR ø 4x40	34 / 14	34 / 14
WBC 137	ANCHOR ø 4x50 / ANCHOR ø 4x40	38 / 14	38 / 14
WBU45 R45-105 (L45-105)	ANCHOR ø 4x50 / ANCHOR ø 4x40	8 / 4	8 / 4
WBU45 R50-105 (L50-105)	ANCHOR ø 4x50 / ANCHOR ø 4x40	8 / 4	8 / 4
WBU45 R60-120 (L60-120)	ANCHOR ø 4x50 / ANCHOR ø 4x40	10 / 5	10 / 5
KKB 1	ANCHOR ø 4x50 / ISO 4014 M16x160-5.8	24 / 1	48 / 2
LB 1	ISO 4014 M12x120-5.8 / ISO 4014 M12x90-5.8	1 / 1	1 / 2
LB 2	ISO 4014 M12x120-5.8 / ISO 4014 M12x90-5.8	1 / 1	1 / 2
LB 4	ISO 4014 M12x120-5.8 / ISO 4014 M12x90-5.8	1 / 1	1 / 2
NT 25	ISO 4017 M5x16-8.8	6	6
NT 40	ISO 4017 M5x16-8.8	10	10
NT 60	ISO 4017 M5x16-8.8	14	14
KPS 1	ANCHOR ø 4x50	16	32
KPS 2	ANCHOR ø 4x50	36	72
KPS 3	ANCHOR ø 4x50	20	40

Detail	Dowel type connectors	Connectors/Detail [pc.]	Connectors/Connection [pc.]
KPS 4	ANCHOR ø 4x50	20	40

ANNEX 6

REFERENCE DOCUMENTS

[1] Guideline for European Technical Approval of Three-dimensional nailing plates ETAG 015 (edition November 2012)

[2] Declaration about dangerous substances issued by DOMAX sp. z o.o.

[3] EN 26891:1991 Timber structures – Joints made with mechanical fasteners – General principles for the determination of strength and deformation characteristics

[4] EN ISO 8970:2010 Timber structures – Testing of joints made with mechanical fasteners – Requirements for wood density

[5] EN 384+A1:2019 Structural timber – Determination of characteristic values of mechanical properties and density

[6] EN 13183-2:2002 Moisture content of a piece of sawn timber - Part 2: Estimation by electrical resistance method

[7] EN 1309-1:1997 Round and sawn timber - Method of measurement of dimensions - Part 1: Sawn timber

[8] EN 14358:2006 Timber structures – Calculation and verification of characteristic values

[9] EOTA TR 016 "*Method of testing Three-Dimensional Nailing Plates* with examples", version February 2002

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base

According to the decision 1997/638/EC[1], of the European Commission the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011 and Commission delegated Regulation (EU) No 568/2014) given in the following table applies:

Product(s)	Intended use(s)	Level(s) or class(es)	Attestation of conformity system(s)
Shear plates, toothed-plate connectors, punched nail plates, nailing plates	For structural timber products		2+

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD

Issued in Prague on 28.04.2020

By
Mária Schaan
Head of the TAB

Annexes:

Annex 1	Product details and definitions
Annex 2	Loading and calculations according to static diagrams
Annex 3	The characteristic load carrying capacities of connectors
Annex 4	Nailing patterns
Annex 5	Specification of connection elements
Annex 6	Reference documents

[1] Official Journal of the European Communities L 268/36 of 19.9.1997

„Technický a zkušební ústav stavební Praha, s.p.“
Prosecká 811/76a
190 00 Praha,
Čekija
Tel.: +420 286 019 400
Interneto svetainė: www.tzus.cz

Designated according to Article 29 of Regulation (EU) No 305/2011

Priklauso
www.eota.eu

Europos techninis įvertinimas

ETA 14/0425, 2020-04-28

Bendroji dalis

Techninio vertinimo įstaiga, išduodanti Europos techninio vertinimo dokumentą „Technický a zkušební ústav stavební Praha, s.p.“	
Statybos produkto komercinis pavadinimas	„DMX®“
Produkto kategorija, kuriai priskirtas nurodytas statybos produktas	Produkto sritis: 13 Trimatės įkalamos plokštelės
Gamintojas	„DOMAX Sp.z o.o.“ Aleja Parku Krajobrazowego 109 84-207 Koleczkowo Łężyce Lenkijos Respublika
Gamykla	„DOMAX Sp.z o.o.“ Aleja Parku Krajobrazowego 109 84-207 Koleczkowo Łężyce Lenkijos Respublika
Šį Europos techninį vertinimą sudaro	65 lapų, įskaitant 6 priedus, kurie yra neatsiejama šio Europos techninio vertinimo dalis
Šis Europos techninis vertinimas išduotas vadovaujantis reglamentu (ES) Nr. 305/2011, remiantis	ETAG 015 naudojamas kaip Europos vertinimo dokumentas (EAD)
Ši redakcija pakeičia	ETA 14/0425, 01 redakciją, išleistą 2014-11-13

Šio Europos techninio vertinimo vertimai į kitas kalbas visiškai atitinka išduotą dokumento originalą ir turėtų būti juo laikomi.

Šis Europos techninis vertinimas yra perduodamas pilna apimti (įskaitant jo perdavimą elektroninio ryšio priemonėmis). (išskyrus aukščiau nurodytą(-us) konfidencialų(-ius) priedą(-us)). Vertinimo dalinės kopijos gali būti daromos tik esant rašytiniam Techninį vertinimą išdavusios organizacijos – „Prahos statybų technikos ir tyrimų instituto“ – sutikimui. Bet koks dalinis atgaminimas turi būti nurodomas kaip toks.

1 Techninis produkto aprašymas

„DMX“® trimatės įkalamos plokštelės yra vienos dalies, nesuvirinti arba suvirinti (KKB, PS, SDP 90 A, SDP 90 B, SDP 100 A, SDP 100 B, SDP 120 A, SDP 120 B, SDSP 70 A, SDSP 70 B) elementai, pagaminti iš šaltai formuoto DX51D klasės plieno lakšto pagal EN 10346, kurio cinko dangos masė 275 g/m^2, DC01 elektrocinkuoto plieno pagal EN 10131 su apsauga nuo korozijos Fe/Zn 12 arba S235 pagal EN 10025-2 su bent 12 µm cinko sluoksniu. Elementai SD ir SDS turi papildomą 60 µm miltelinį dažymą (žr. sąrašą žemiau). „DMX“® trimatės įkalamos plokštės atitinka 1 priede pateiktus brėžinius ir matmenis.

Techninis produkto aprašymas

„Domax“ jungties tipas	Pagaminta iš	Apsaugos nuo korozijos rūšis
KLR	DX51D	Z275
KP	DX51D	Z275
KPK	DX51D	Z275
KPL	DX51D	Z275
KR	KR 1 – DC01 KR 2 – DX51D KR 3 – DX51D	Fe/Zn 12 Z275 Z275
KRD	DX51D	Z275
LU	DX51D	Z275
WBC	DX51D	Z275
WBU	DX51D	Z275
ŁB	S235	Fe/Zn 12
NT	DX51D	Z275
KKB	S235	Fe/Zn 12
SP	S235 / B500	Fe/Zn 12
KPS	DX51D	Z275
SD	SDLZ 1 – DX51D SDKLR 1 – DX51D SDKL 1 – DX51D SDP 90 A – S235 SDP 90 B – S235 SDP 100 A – S235 SDP 100 B – S235 SDP 120 A – S235 SDP 120 B – S235 SDD 85 A – DX51D SDD 85 B – DX51D	Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga
„SDS“	SDSP 70 A – S235 SDSP 70 B – S235 SDSKW 2 – DX51D SDSKW 8 – DX51D SDSKP 1 – DX51D SDSKP 5 – DX51D SDSKM 7 – DX51D SDSWBZ 10 – DX51D SDSWBZ 11 – DX51D SDSWBZ 14 – DX51D SDSWBZ 21 – DX51D SDSWBZ 26 – DX51D SDSWBZ 30 – DX51D	Fe/Zn 12 + 60 µm miltelinė danga Fe/Zn 12 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga Z275 + 60 µm miltelinė danga

1.1 Identifikavimas

Identifikavimo parametrai ir nuoroda į gaminio specifikacijas, skirtas identifikuoti medžiagas ir komponentus, sudarančius trimates įkalamas plokšteles, pateikti 1 priede.

2 Numatytos (-ų) paskirties (-čių) specifikacija pagal taikomą Europos vertinimo dokumentą (toliau – EAD)

„DMX“® trimatės įkalamos plokštelės yra skirtos naudoti jungtims mediena-mediena, taip pat jungtims tarp medinės sijos ir betoninės konstrukcijos arba plieninės konstrukcijos. Skirtos sujungti statmenus, laikančius, medienos masyvo elementus, medienos elemento šono ir medienos elemento šono konfigūracijose, jungtyse, kurioms keliami mechaninio atsparumo ir stabilumo reikalavimai Reglamento (ES) Nr. 305//2011 bazinio reikalavimo Nr. 1 prasme.

Jungtims su „DMX“® trimatėmis įkalamomis plokštelėmis turi būti naudojamos žieduoto stiebo vinys pagal EN 14592, kurių skersmuo 4 mm ir būdingas tempimo stipris $F_{ax,Rk}$ ne mažesnis nei 1,80 kN.

Atsižvelgiant į atsparumo korozijai reikalavimus, „DMX“® trimatės įkalamos plokštelės skirtos naudoti medinėse konstrukcijose, kurioms taikomos 1, 2 ir 3 naudojimo klasėse (jungtys su papildomu milteliniu dažymu) apibrėžtos vidinės sąlygos pagal EN 1995-1-1 (Eurokodas 5), atsparumo korozijai C1 ir C2 kategorijose pagal EN ISO 12944-2, be rūgščių dujų ar garų poveikio.

Šiame Europos techniniame patvirtinime pateiktos nuostatos pagrįstos prielaida, kad numatomas produkto tarnavimo laikas yra 50 metų. Nurodymai apie eksploatacinį laikotarpį negali būti laikomi gamintojo arba patvirtinimo institucijos suteikta garantija, bet turi būti laikomi tik informacine nuoroda renkantis reikiamus produktus atsižvelgiant į numatomą ekonomiškai pagrįstą eksploatacinį visos konstrukcijos laikotarpį.

„DMX“® trimačių įkalamų plokštelių tinkamumo naudoti pagal paskirtį įvertinimas buvo atliktas pagal ETAG 015 „*Trimatės įkalamos plokštelės*“, naudojamą kaip Europos vertinimo dokumentą (EAD).

2.1 Trimačių įkalamų plokštelių montavimas

Galima daryti prielaidą, kad „DMX“® trimates įkalamas plokšteles galima naudoti galima tik tada, jei laikomasi šių montavimo sąlygų:

- montavimą atlieka tinkamai kvalifikuotas personalas, prižiūrimas šiam darbui kvalifikuoto asmens,
- naudojamos tik originalios trimatės įkalamos plokštelės, kurias gamintojas pateikia kartu su 2.2.2 punkte apibrėžtomis tinkamomis žieduoto stiebo vinimis,
- trimačių įkalamų plokštelių montavimas atliekamas pagal gamintojo montavimo vadovą,
- prieš dedant trimates įkalamas plokšteles, patikrinamos medinių elementų, į kuriuos bus dedamos įkalamos plokštelės, charakteristikos (tipas, klasė ir drėgnumas), siekiant įsitikinti, kad jos yra identiškos arba geresnės nei medinių elementų, naudojamų bandymams, kurių metu buvo nustatytos būdingos keliamosios galios,
- į trimatę įkalamą plokštelę įstatytame mediniame elemente nėra briaunų, o tarpas tarp sujungtų elementų neviršija 3 mm.

3 Produkto eksploatacinės savybės ir nuorodos į jo vertinimui naudotus metodus

Trimačių įkalamų plokštelių tinkamumo naudoti pagal bazinius darbo reikalavimus (BDR) vertinimas buvo atliktas vadovaujantis ETAG 015.

Europos techninis įvertinimas trimatėms įkalamoms plokštelėms išduotas remiantis sutartais duomenimis ir informacija, pateiktais „Technický a zkušební ústav stavební Praha, s.p.“, kurie identifikuoja trimates įkalamas plokšteles, kurios buvo įvertintos ir išbandytos. Apie plokštelių ar gamybos proceso pakeitimus, dėl kurių šie saugomi duomenys ir informacija gali būti neteisingi, reikia pranešti „Technický a zkušební ústav stavební Praha, s.p.“ prieš įvedant pakeitimus. „Technický a zkušební ústav stavební Praha, s.p.“ nuspręs, ar tokie pakeitimai turi įtakos ETA ir atitinkamai CE ženklo galiojimui, remiantis ETA, ir jei taip, ar reikės atlikti tolesnį ETA vertinimą ar pakeitimus.

1 lentelė Pagrindinės produkto savybės

	Pagrindinė charakteristika	Eksploatacinės savybės
3.1 BDR 1: Mechaninis atsparumas ir stabilumas		
3.1.1	Jungties stiprumas	Žr. 3 priedą
3.1.2	Jungties standumas	Nenustatinėta
3.1.3	Jungties lankstumas atliekant	Nenustatinėta
3.2 BDR 2: Sauga gaisro atveju		
3.2.1	Reakcija į ugnį	Plieniniai elementai priskiriami A1 reakcijos į ugnį klasei (nedegūs produktai) pagal EN 13501-1+A1 ir Europos Komisijos sprendimą 96/603/EB su pakeitimais, padarytais Europos Komisijos sprendimu 2000/605/EB.
3.2.2	Atsparumas ugniai	Nenustatinėta
3.3 BDR 3: Higiena, sveikata ir aplinka		
3.3.1	Pavojingų medžiagų kiekis, emisija ir (arba) išleidimas	Žr. 3.3.1
BDR 4: Sauga ir prieinamumas naudojant		
Netaikoma		
BDR 5: Apsauga nuo triukšmo		
Netaikoma		
BDR 6: Energijos taupymas ir šilumos išlaikymas		
Netaikoma		
BDR 7: Tvarus gamtos išteklių naudojimas		
Netaikoma		

3.1 Mechaninis atsparumas ir stabilumas (BDR 1)

3.1.1 Jungties stiprumas

Jungčių, apkrautų pagal statines diagramas (pateiktos 2 priede), būdingos keliamosios galios, nustatytos bandymais atliktais pagal ETAG 015 5.1.3 punktą, pateiktos 3 priede. Būdingos jungčių keliamosios galios kitai apkrovos krypčiai apskaičiuojamos remiantis EN 1995-1-1 (Eurokodas 5) arba pagal nacionalinius reglamentus. Projektinės vertės turi būti nustatytos pagal EN 1995-1-1 (Eurokodas 5).

Vadovaudamasis ETAG 015 reikalavimais dėl minimalaus bandinių skaičiaus, skirto būdingosioms laikomosioms galioms nustatyti atliekant bandymus, prašymo pateikėjas laboratorijai pateikė po 5 kiekvieno bandomojo mazgo bandinius, išsiskiriančius jungties tipu, jungties konfigūracija ir statine diagrama (jėgos veikimo kryptis).

Taikomi standartinių procedūrų pakeitimai kyla iš ETAG 015 reikalavimų. Procedūra, nurodyta standarto nuorodoje Nr. 6 yra pakeista kaip reikalaujama EOTA TR 016 *„Trimačių įkalamų plokštelių bandymo metodas“* su pavyzdžiais, konkrečiai procedūra, atitinkanti atvejį „*Bandymo bandiniai atitinka EN ISO 8970*“, kuris, kaip nurodyta aukščiau, buvo aktualus visais atvejais.

Kaip susitarė prašymo pateikėjas ir laboratorija, prašymo pateikėjas nustatytomis sąlygomis pagamino, apdorojo ir atgabeno į laboratoriją bandinių mazgus.

Sąlygos buvo tokios:
Naudoti medienos elementai – pjautinės medienos ruošiniai iš europinės baltos medienos, C24 markės, be didelių defektų jungties srityje. Medienos elementų parinkimas iš bandymo grupės (penki bandiniai), atsižvelgiant į tankį, turi atitikti EN ISO 8970 reikalavimus. Bandant jungtis „Technický a zkušební ústav stavební Praha, s.p.“ buvo naudojami medienos bandiniai, kurių būdingas tankis 350 kg/m^3.
Mėginiai buvo pristatyti keturiomis siuntomis iš eilės, būklė „tinkami tiesioginiam tyrimui“, o tai reiškia, kad medienos elementų apdorojimas iki pusiausvyros drėgmės kiekio, atitinka Cl reikalavimus. 2.4.1.1.3.3. ETAG 015 atliko prašymo pateikėjas. Užbaigtos ir apdorotos bandymo konstrukcijos buvo pristatytos apsaugotos plastikine plėvele.

Apdorojimas laboratorijoje susideda iš bandinių temperatūrų ir aplinkos temperatūros suvienodinimo, laikant laboratorijoje mažiausiai 3 dienas, per tą laiką bandiniai liko suvynioti į plastiką. Daugeliu atvejų sandėliavimo terminas buvo daug ilgesnis.

Kontroliuojant, ar medienos ruošinių tankis atitinka EN ISO 8970 reikalavimus, nustatyti medinių elementų matmenys, santykinis drėgnumas ir mazgų svoris. Tai buvo atlikta su išvyniotais bandiniais prieš pat kiekvieno bandinio apkrovos bandymą. Nurodoma, kad daugeliu atvejų standarto reikalavimas buvo įvykdytas. Kai kuriais atvejais, kai vidutinis medienos tankis viršijo standarte nurodytą ribą, buvo padaryta išimtis pagal atitinkamą EOTA TR 016 nuostatą.

3.1.2 Jungties standumas

Nenustatinėta.

3.1.3 Jungties lankstumas atliekant ciklinius bandymus

Nenustatinėta.

3.2 Sauga gaisro atveju (BDR 2)

3.2.1 Reakcija į ugnį

Plieniniai elementai priskiriami A1 reakcijos į ugnį klasei (nedegūs produktai) pagal EN 13501-1+A1 ir Europos Komisijos sprendimą 96/603/EB su pakeitimais, padarytais Europos Komisijos sprendimu 2000/605/EB.

3.2.2 Atsparumas ugniai

Eksploatacinės savybės, susijusios su atsparumu ugniai, būtų nustatomos visam konstrukciniam elementui su bet kokia susijusia apdaila, todėl šiame baziniame darbo reikalavime nėra taikomas eksploatacinių savybių vertinimo variantas.

3.3 Higiena, sveikata ir aplinka (BDR 3)

3.3.1 Pavojingų medžiagų kiekis, emisija ir (arba) išleidimas

Gamintojas pateikia raštišką deklaraciją, ar trimatėse įkalamose plokštelėse yra medžiagų, kurios pagal direktyvą 67/548/EEB ir Europos Komisijos reglamentą Nr. 1272/2008 yra klasifikuojamos kaip pavojingos, ar ne.
Be konkrečių punktų, susijusių su pavojingomis medžiagomis, gaminiams, patenkantiems į jų taikymo sritį, gali būti taikomi ir kiti reikalavimai (pvz., perkelti Europos teisės aktai ir nacionaliniai įstatymai, kiti teisės aktai ir administracinės nuostatos). Tam, kad būtų laikomasi Statybos produktų reglamento nuostatų, šių reikalavimų taip pat turi būti laikomasi tais atvejais kai jie yra taikomi.

3.4 Sauga ir prieinamumas naudojant (BDR 4)

Neaktualu.

3.5 Apsauga nuo triukšmo (BDR 5)

Neaktualu.

3.6 Energijos taupymas ir šilumos išlaikymas (BDR 6)

Neaktualu.

3.7 Tvarus gamtos išteklių naudojimas (BDR 7)

Tvariam gamtos išteklių naudojimui šio gaminio eksploatacinės savybės nenustatinėtos.

3.8 Patvarumo, tinkamumo naudoti ir identifikavimo aspektai

3.8.1 Patvarumas ir tinkamumas naudoti

„DMX“® trimatės įkalamos plokštelės buvo įvertintos kaip pakankamai patvarios ir tinkamos naudoti, kai jos naudojamos 1 ir 2 naudojimo klasėse apibrėžtose sąlygose pagal EN 1995-1-1 (Eurokodas 5).

3.8.2 Identifikavimas

Kiekviena trimatė įkalama plokštelė turi būti pažymėta simboliu ir gaminio tipo žymėjimu pagal 1 priedą.

4 Taikyta eksploatacinių savybių pastovumo vertinimo ir patikrinimo (toliau - ESPVP) sistema su nuoroda į jos teisinį pagrindą.

Remiantis Europos Komisijos sprendimu 1997/638/EB[1], eksploatacinių savybių pastovumo įvertinimo ir patikrinimo sistema (-os) (žr. Reglamento (ES) Nr. 305/2011 V priedą ir Komisijos deleguotąjį reglamentą (ES) Nr. 2014) pateikta šioje lentelėje, taikoma:

Produktas (-ai)	Numatyta (-os) paskirtis (-ys)	Lygis (-iai) arba klasė (-ės)	Atitikties sistemos(-ų) atestavimas
Šlyties plokštės, dantytų plokščių jungtys, perforuotos vinių plokštelės, įkalamos	Konstrukciniams medienos gaminiams		2+

5 Techniniai duomenys, reikalingi ESPVP sistemai įdiegti, kaip numatyta galiojančiame EAD

Išduota Prahoje, 2020-04-28

Išdavė
Mária Schaan
TAB vadovė


Priedai:

1 priedas Produkto informacija ir aprašymai
2 priedas Apkrova ir skaičiavimai pagal statines diagramas
3 priedas Būdingos jungčių laikomosios galios
4 priedas Kalimo tvarkos
5 priedas Jungiamųjų elementų specifikacija
6 priedas Pagrindžiantys dokumentai


[1] 1997-09-19 Europos Bendrijos oficialusis leidinys L 268/36

1 PRIEDAS

PRODUKTO INFORMACIJA IR APRAŠYMAI

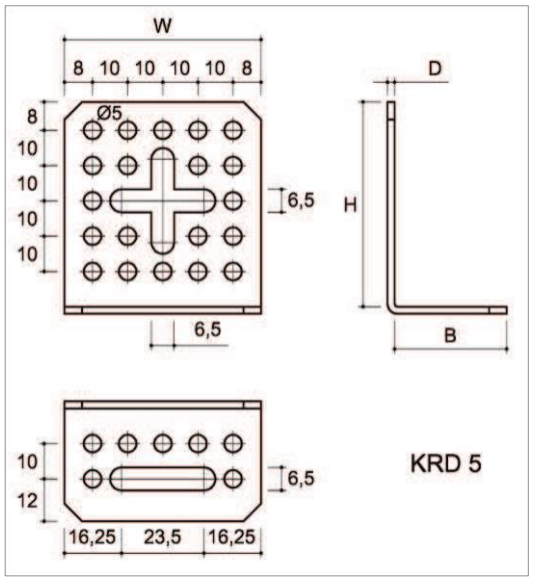


1 pav. Tipas KRD 5

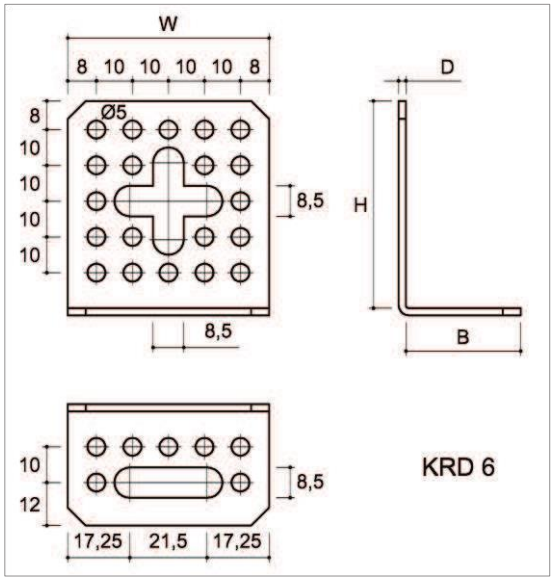

2 pav. Tipas KRD 6

2 lentelė KRD trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Skylių skaičius
	W	H	B	D	ø 5
KRD 5	56	58	32	2	27
KRD 6	56	58	32	2	27

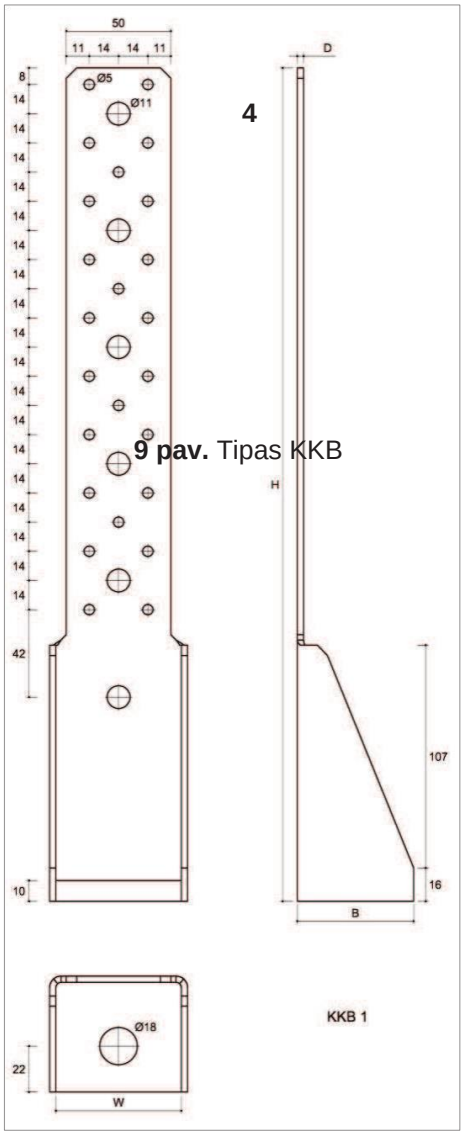


4

9 pav. Tipas KKB


3 pav. Tipas KKB 1

3 lentelė KKB trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis		
	W	H	B	D	ø 5	ø 11	ø 18
KKB 1	60	400	56	3	24	6	1

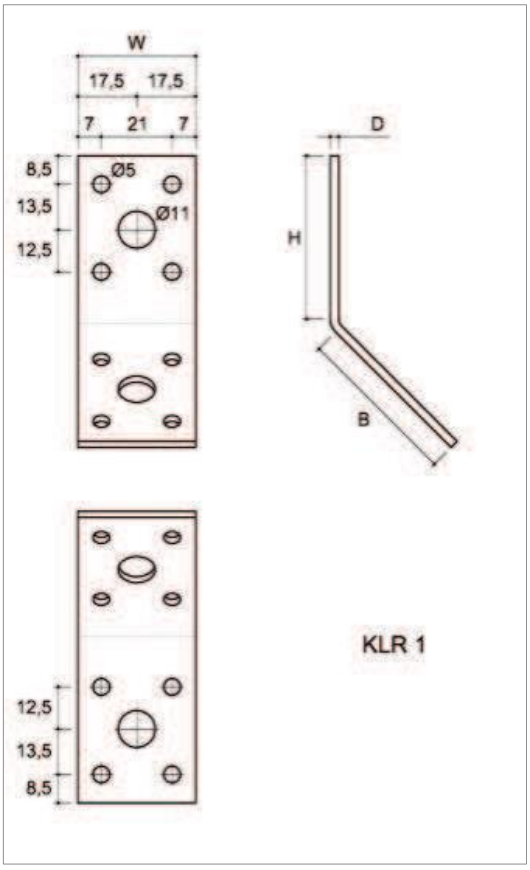


4 pav. Tipas KLR 1

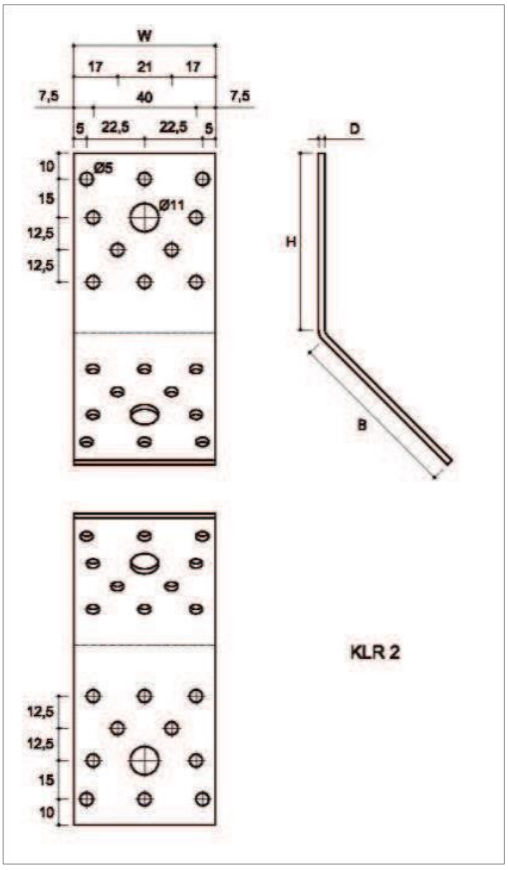


5 pav. Tipas KLR 2

4 lentelė KLR trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
KLR 1	35	50	50	2,5	8	2
KLR 2	55	70	70	2,5	20	2

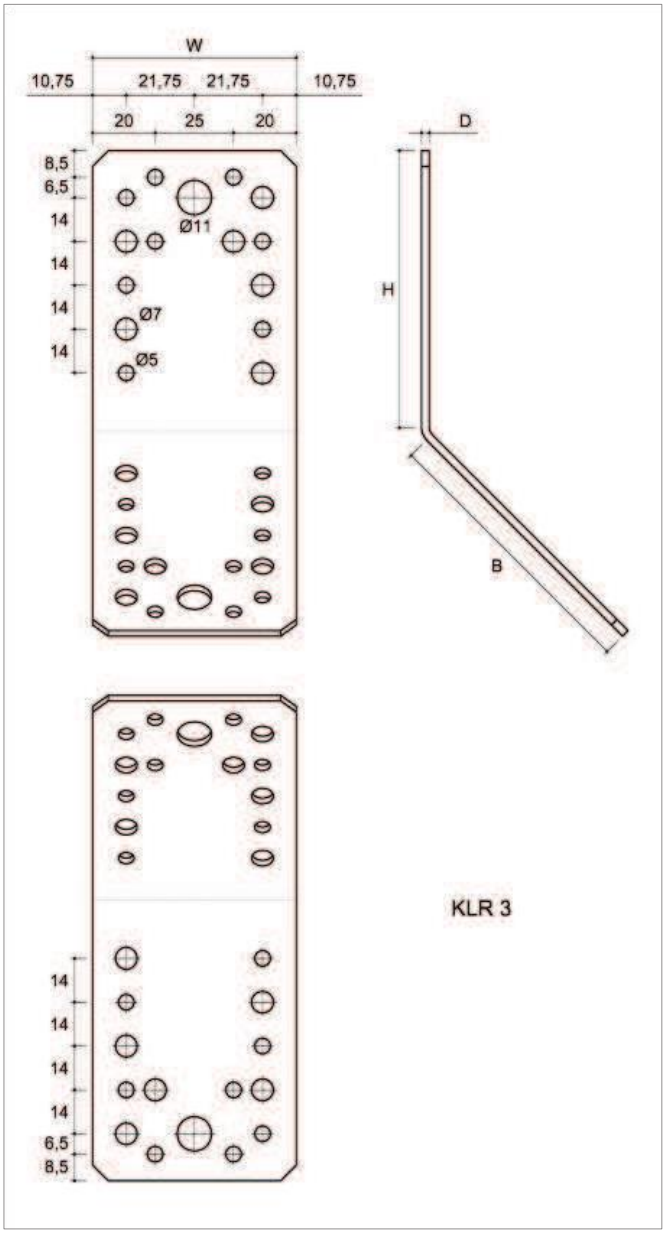


6 pav. Tipas KLR 3

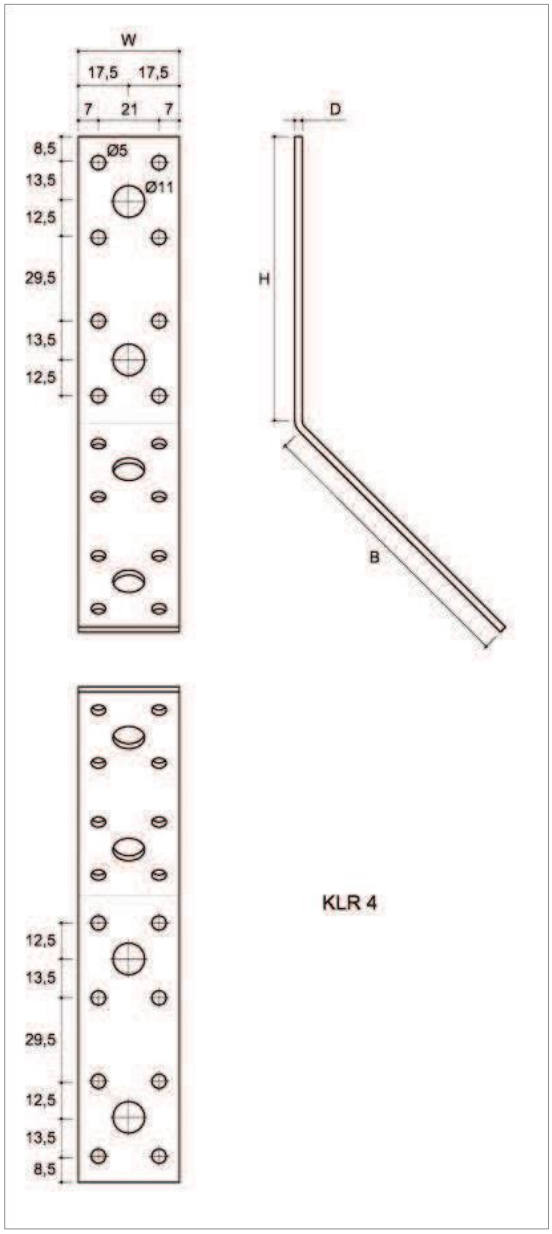


7 pav. Tipas KLR 4

5 lentelė KLR trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis		
	W	H	B	D	ø 5	ø 7	ø 11
KLR 3	65	90	90	2,5	16	12	2
KLR 4	35	100	100	2,5	16	-	4

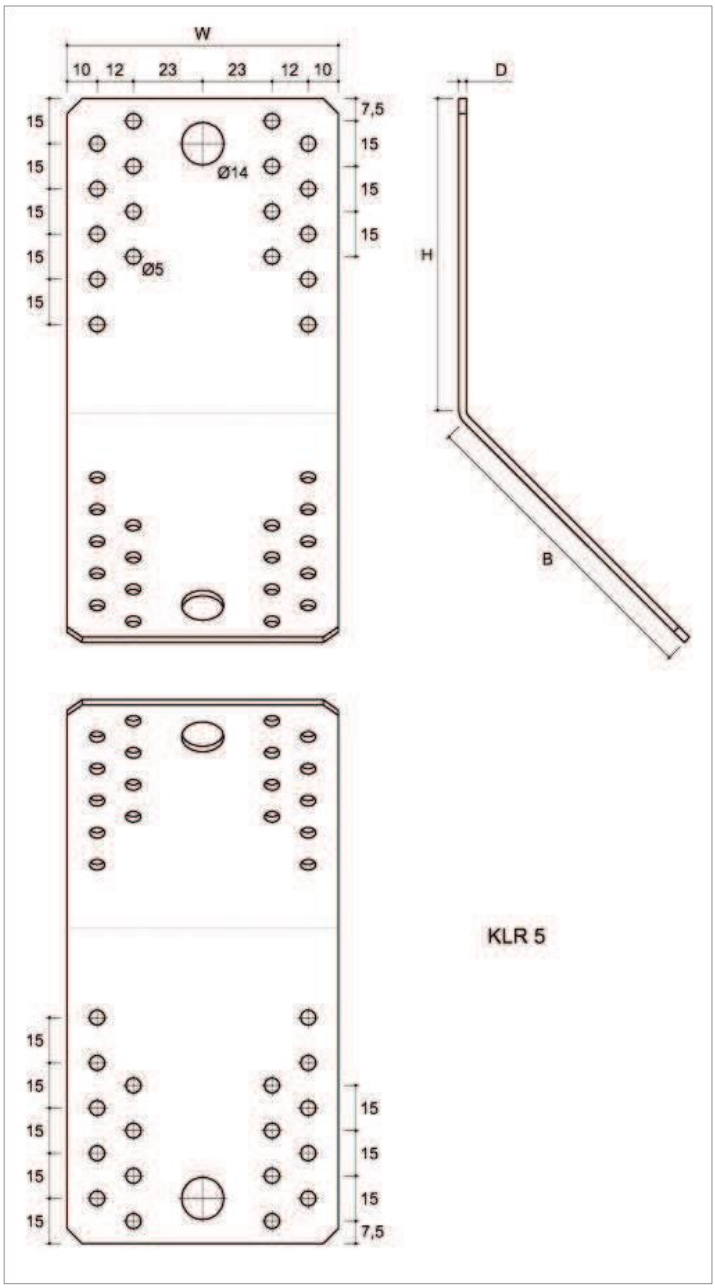


8 pav. Tipas KLR 5

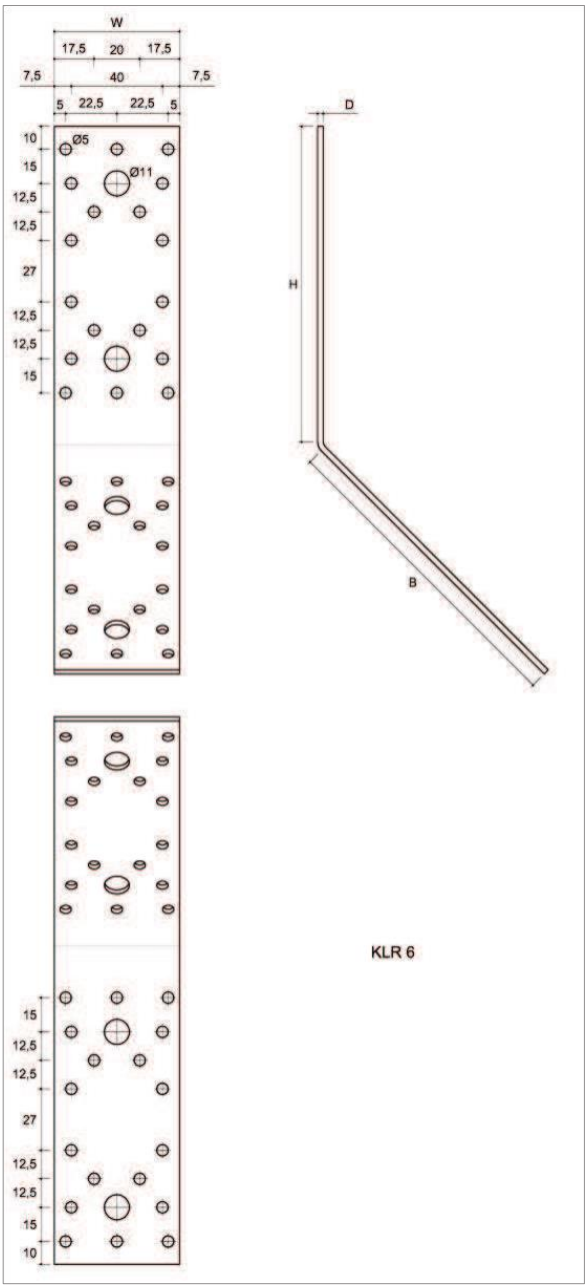


9 pav. Tipas KLR 6

6 lentelė KLR trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis		
	W	H	B	D	ø 5	ø 11	ø 14
KLR 5	90	105	105	2,5	36	-	2
KLR 6	55	140	140	2,5	36	4	-

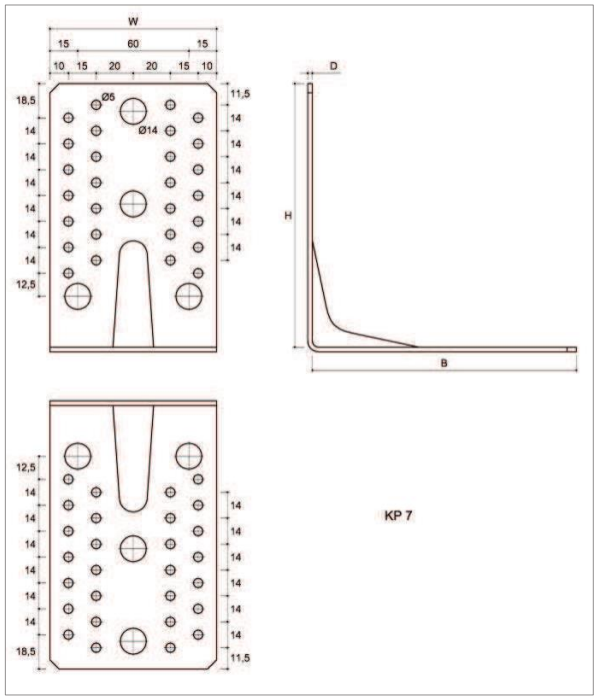


10 pav. Tipas KP 7

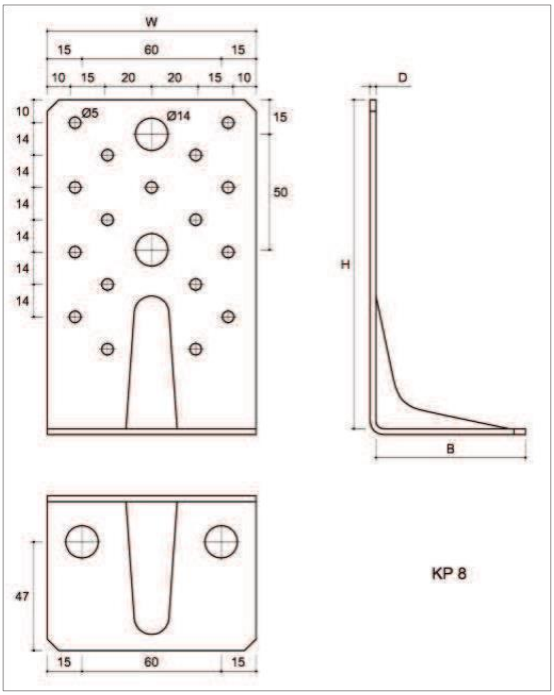


11 pav. Tipas KP 8

7 lentelė KP trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 14
KP 7	90	143	143	2,5	56	8
KP 8	90	143	65	2,5	17	4

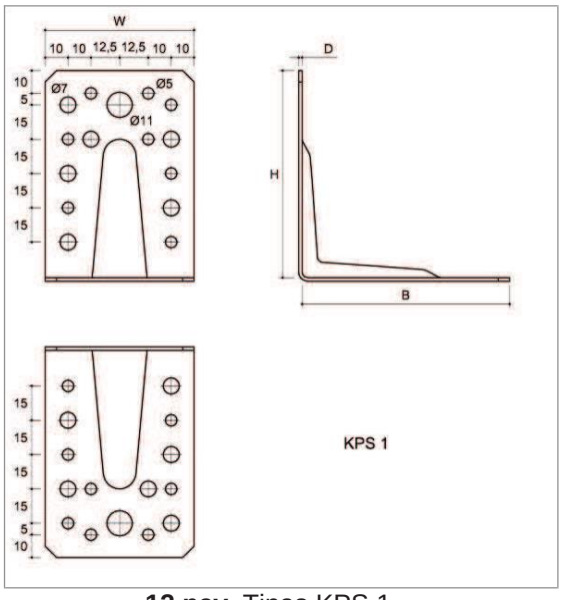


12 pav. Tipas KPS 1

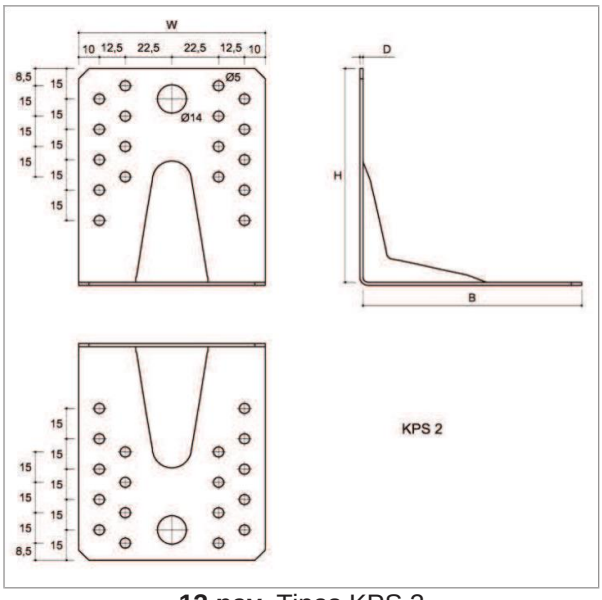

13 pav. Tipas KPS 2

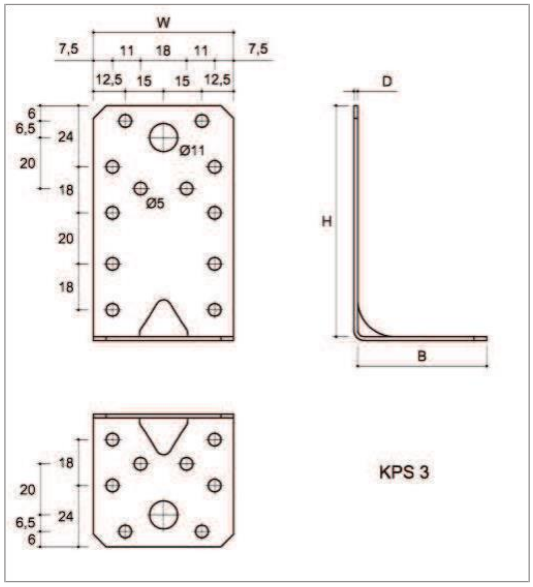


14 pav. Tipas KPS 3

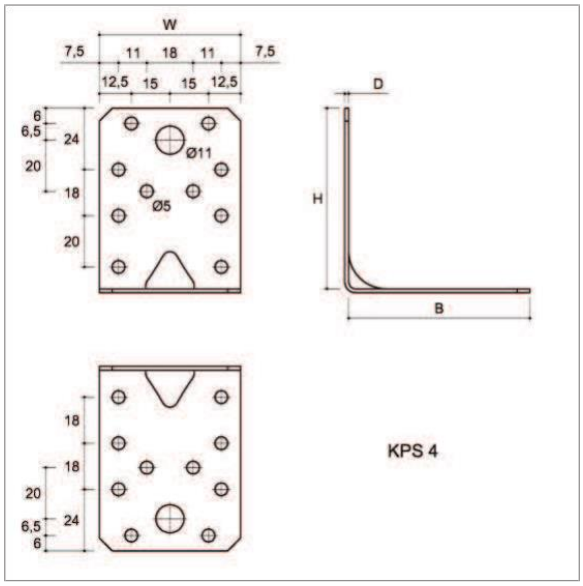


15 pav. Tipas KPS 4

8 lentelė KPS trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis			
	W	H	B	D	ø 5	ø 7	ø 11	ø 14
KPS 1	65	90	90	1,5	16	12	2	-
KPS 2	90	105	105	1,5	36	-	-	2
KPS 3	55	90	50	1,5	20	-	2	-
KPS 4	55	70	70	1,5	20	-	2	-

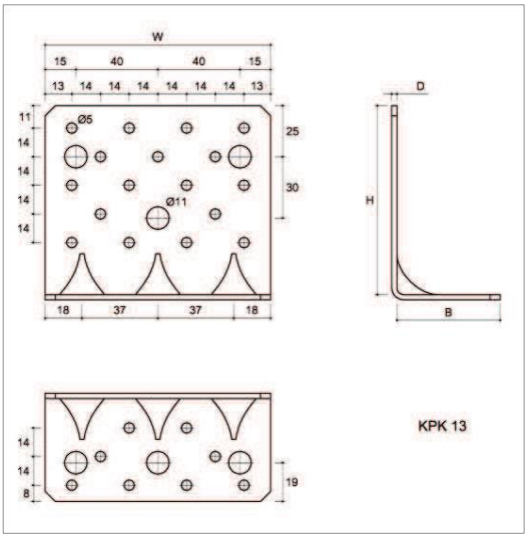

16 pav. Tipas KPK 13

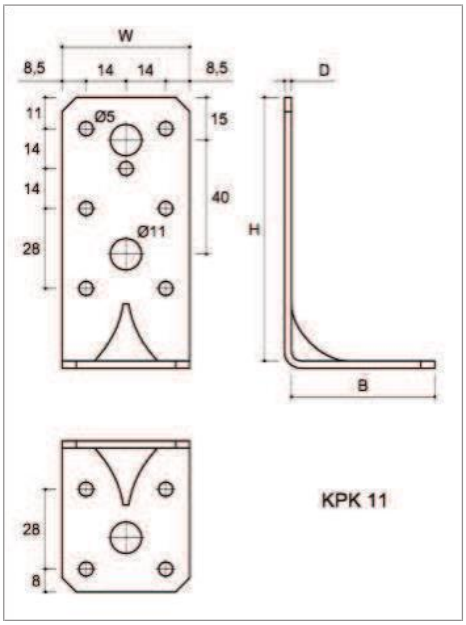


17 pav. Tipas KPK 11

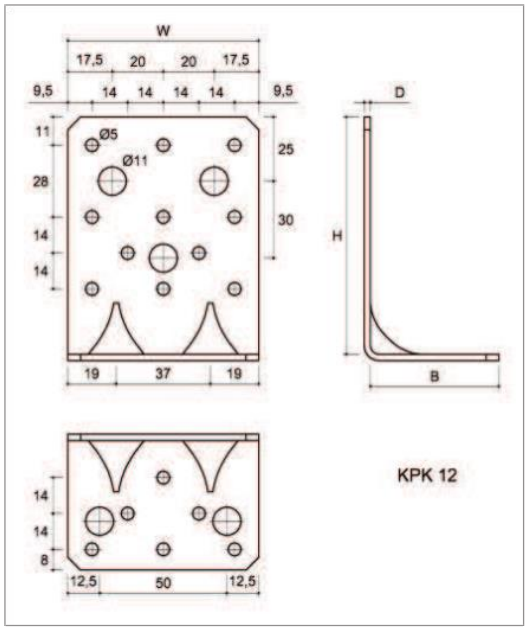


18 pav. Tipas KPK 12

9 lentelė KPK trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
KPK 11	45	93	50	2,5	11	3
KPK 12	75	93	50	2,5	17	5
KPK 13	110	93	50	2,5	25	6

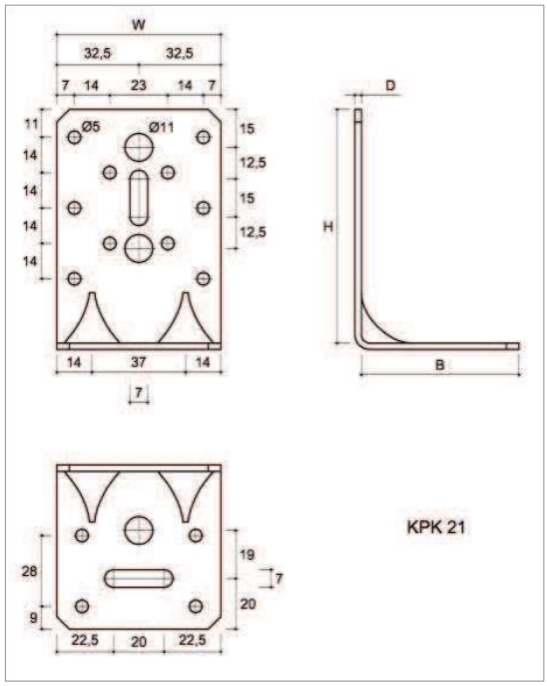

19 pav. Tipas KPK 21

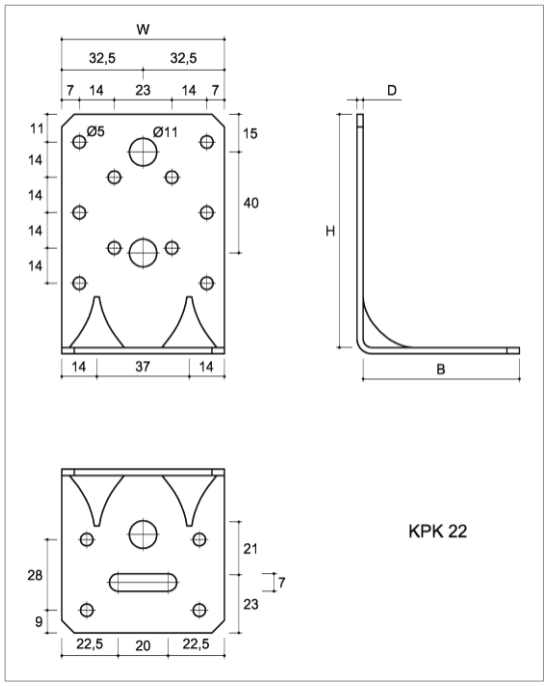


20 pav. Tipas KPK 22

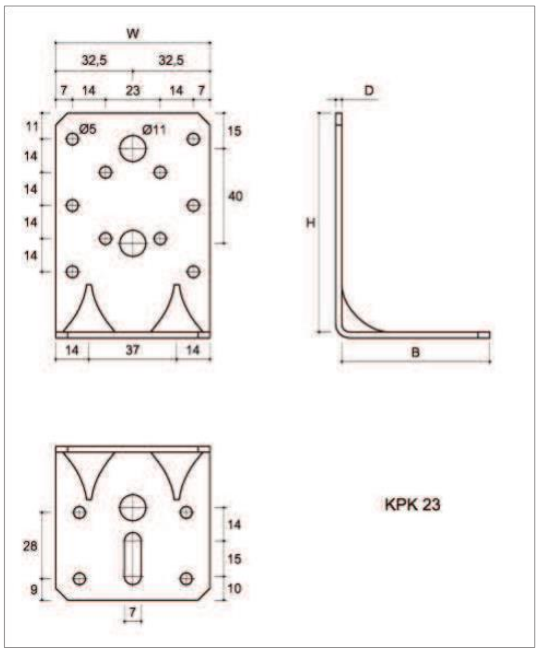


21 pav. Tipas KPK 23

10 lentelė KPK trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
KPK 21	65	93	63	2,5	14	3
KPK 22	65	93	63	2,5	14	3
KPK 23	65	93	63	2,5	14	3

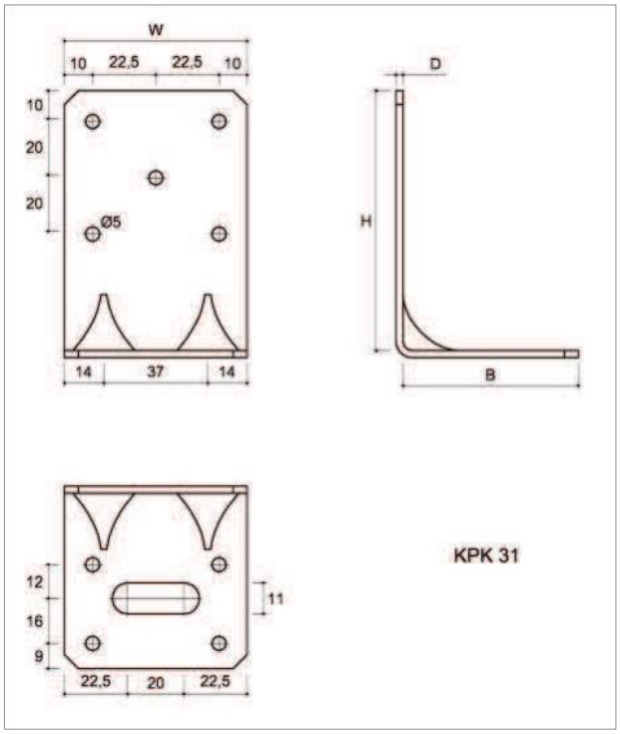


22 pav. Tipas KPK 31

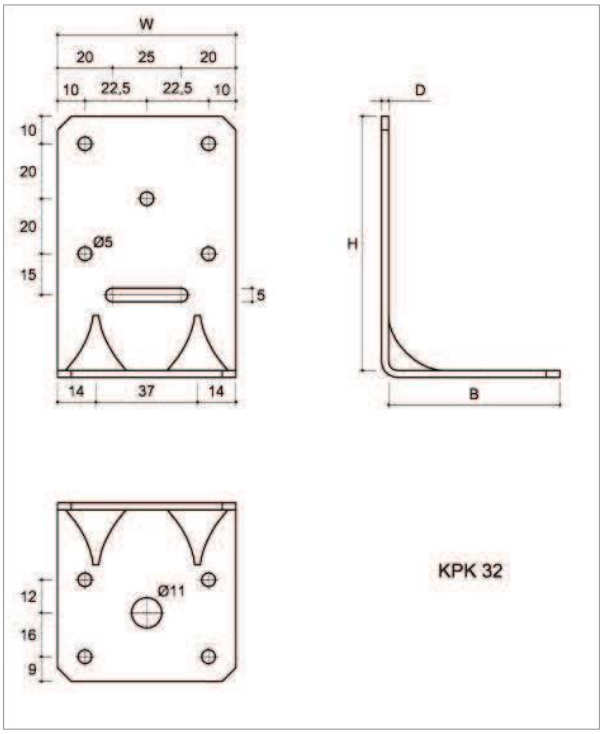

23 pav. Tipas KPK 32

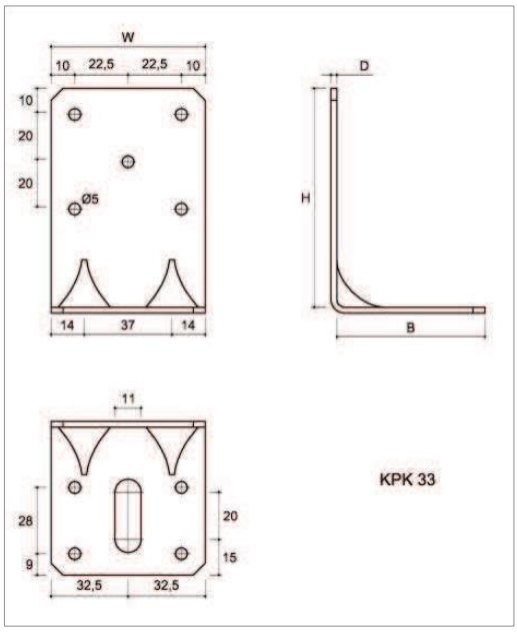


24 pav. Tipas KPK 33

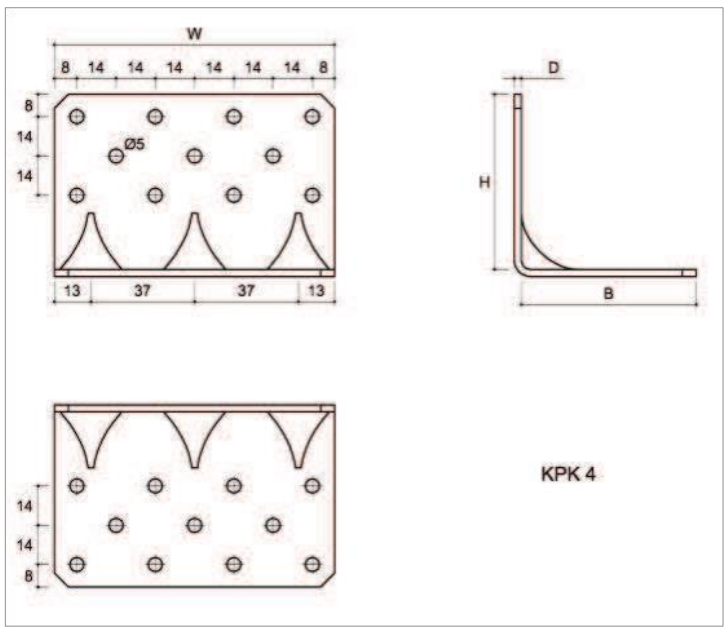


25 pav. Tipas KPK 4

11 lentelė KPK trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
KPK 31	65	93	63	2,5	9	-
KPK 32	65	93	63	2,5	9	1
KPK 33	65	93	63	2,5	9	-
KPK 4	100	63	63	2,5	22	-

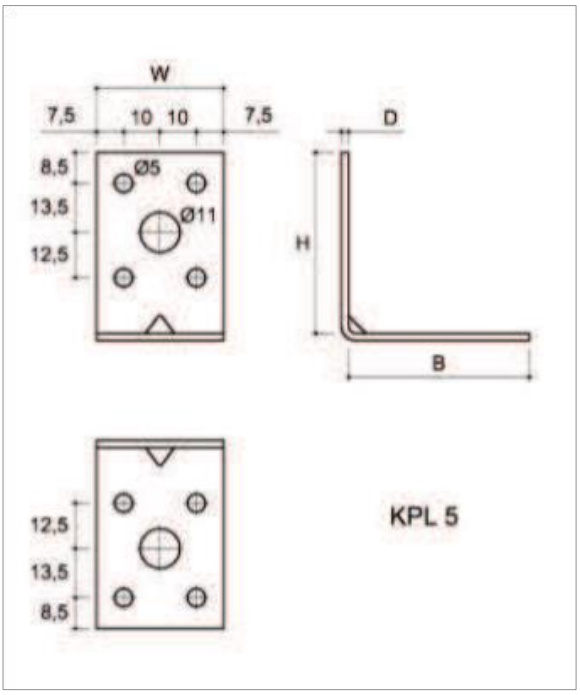


26 pav. Tipas KPL 5

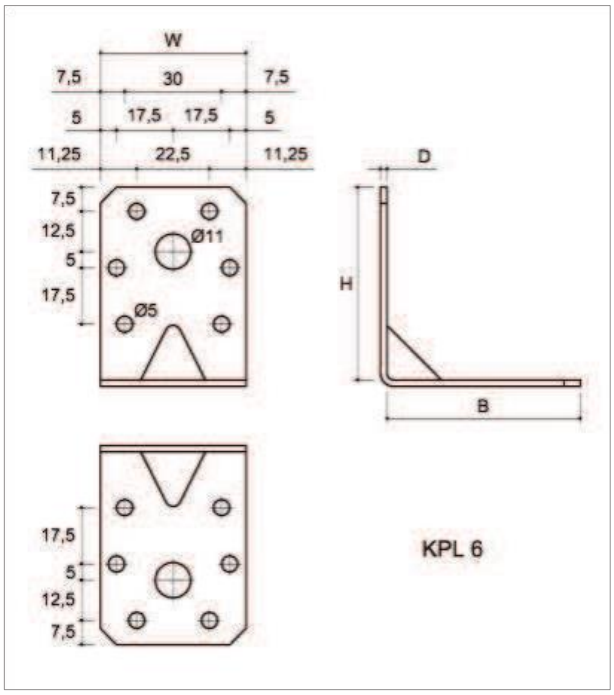

27 pav. Tipas KPL 6

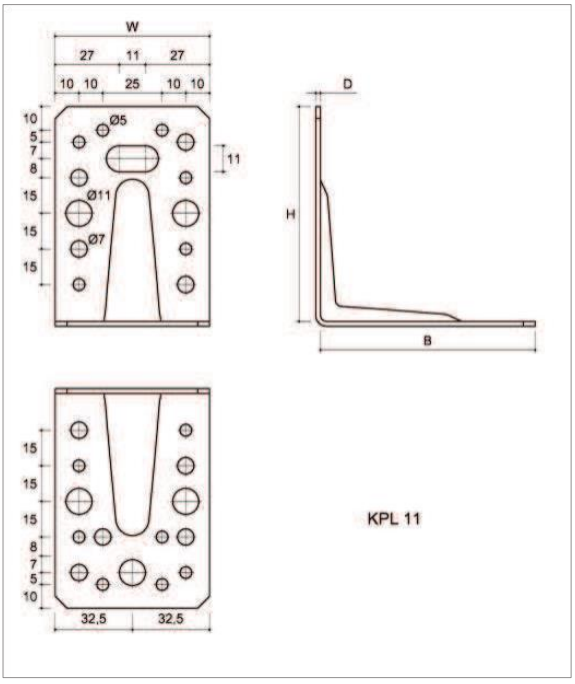


28 pav. Tipas KPL 11

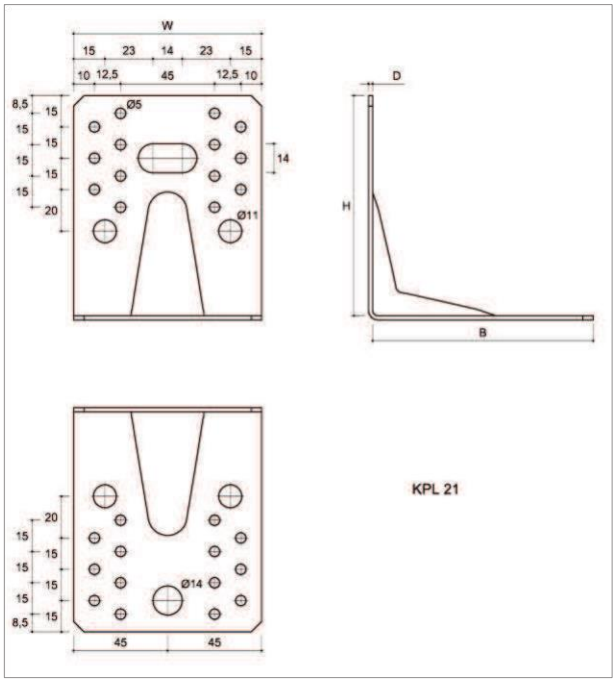


29 pav. Tipas KPL 21

12 lentelė KPL trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis			
	W	H	B	D	ø 5	ø 7	ø 11	ø 14
KPL 5	35	50	50	2	8	-	2	-
KPL 6	45	60	60	2	12	-	2	-
KPL 11	65	90	90	2	13	9	5	-
KPL 21	90	105	105	2	28	-	4	1

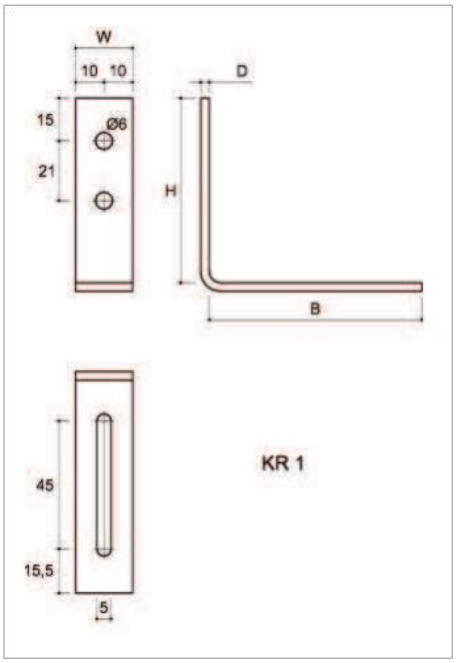

30 pav. Tipas KR 1

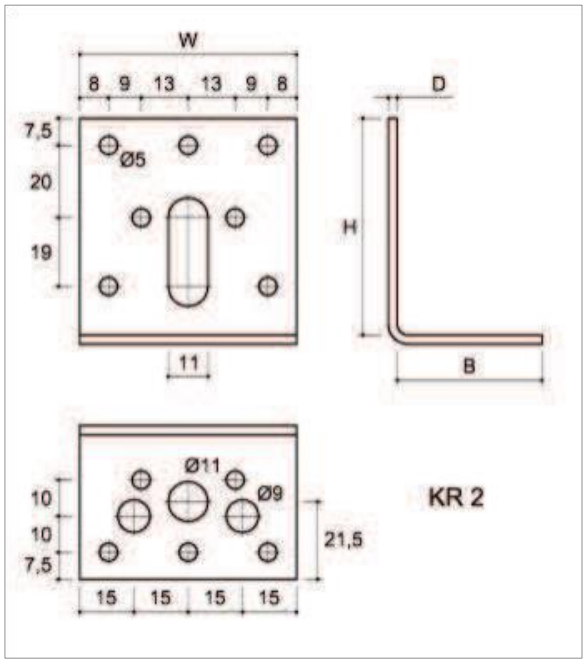


31 pav. Tipas KR 2

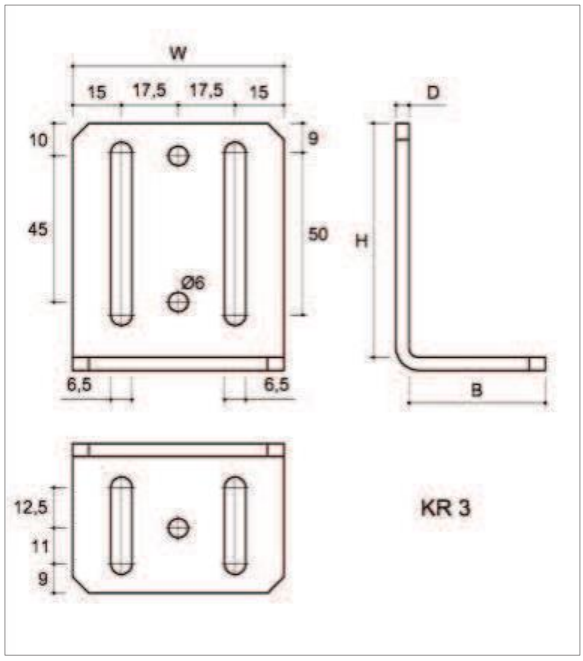


32 pav. Tipas KR 3

13 lentelė KR trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis			
	W	H	B	D	ø 5	ø 6	ø 9	ø 11
KR 1	20	65	75	3	-	2	-	-
KR 2	60	60	40	2,5	12	-	2	1
KR 3	65	72	42	4	-	3	-	-

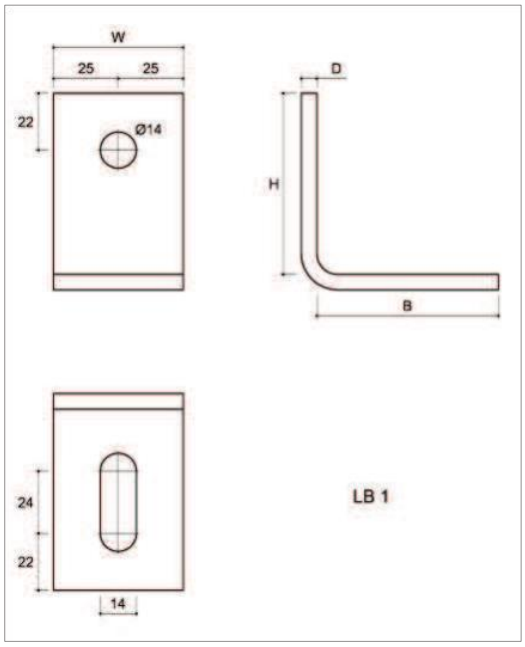

33 pav. Tipas LB 1

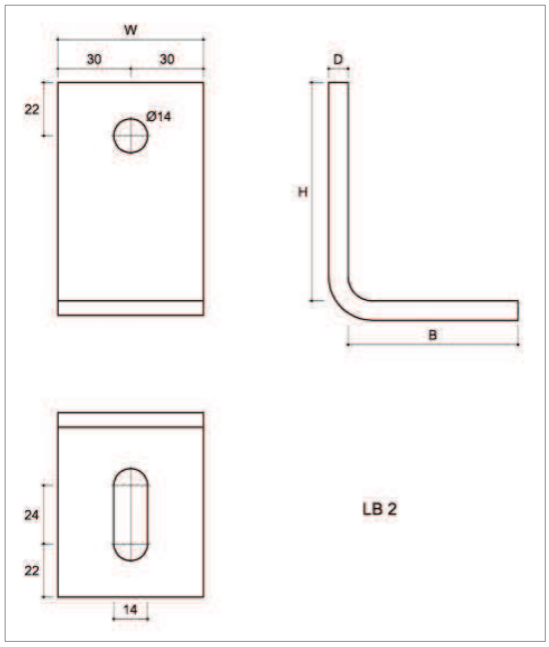


34 pav. Tipas LB 2

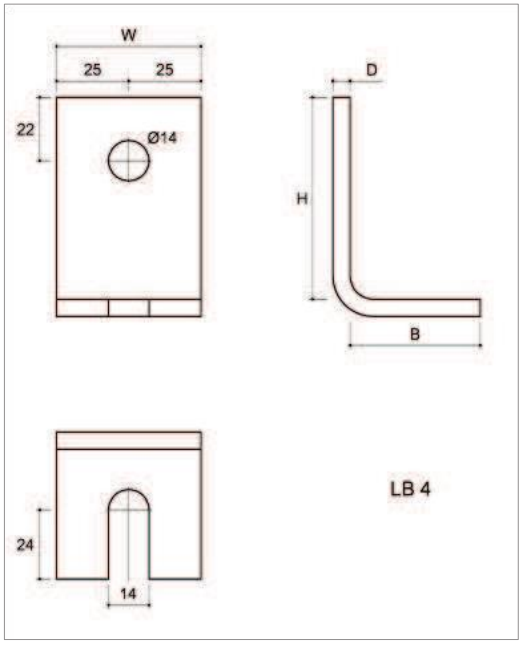

35 pav. Tipas LB 4

14 lentelė LB trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis
	W	H	B	D	ø 14
LB 1	50	70	70	6	1
LB 2	60	90	70	8	1
LB 4	50	70	45	6	1

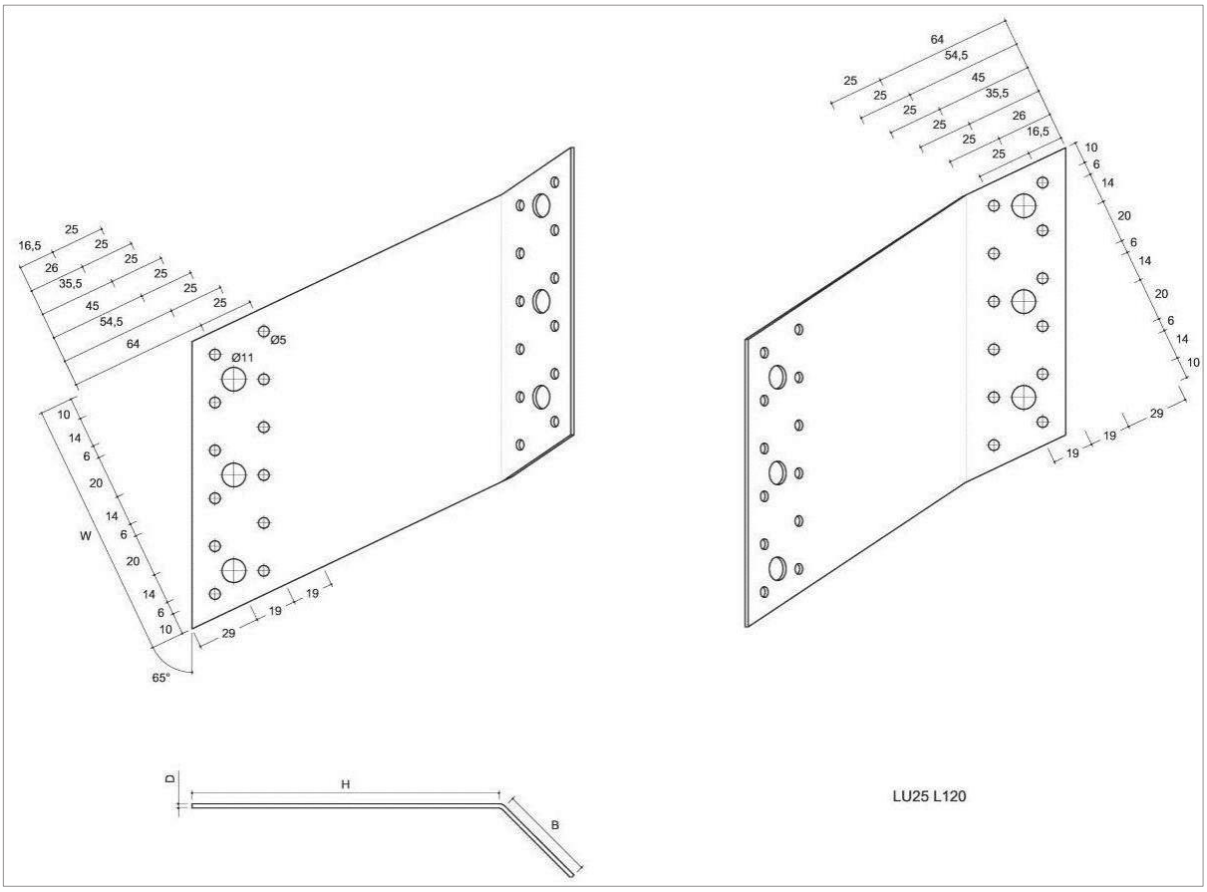

36 pav. Tipas LU25 L120

15 lentelė LU25 trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
LU25 L80	80	142	45	2	16	4
LU25 R80	80	142	45	2	16	4
LU25 L120	120	142	45	2	24	6
LU25 R120	120	142	45	2	24	6

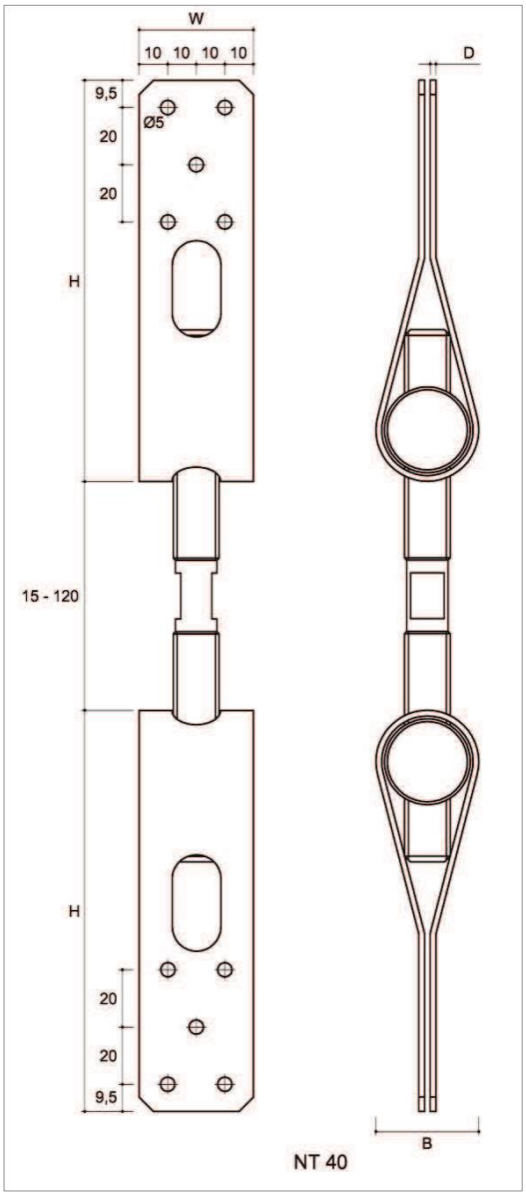

37 pav. Tipas NT 40

16 lentelė NT trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis
	W	H	B	D	ø 5
NT 25	30	137	25	1,5	12
NT 40	40	140	36	2	10
NT 60	60	140	36	2	14

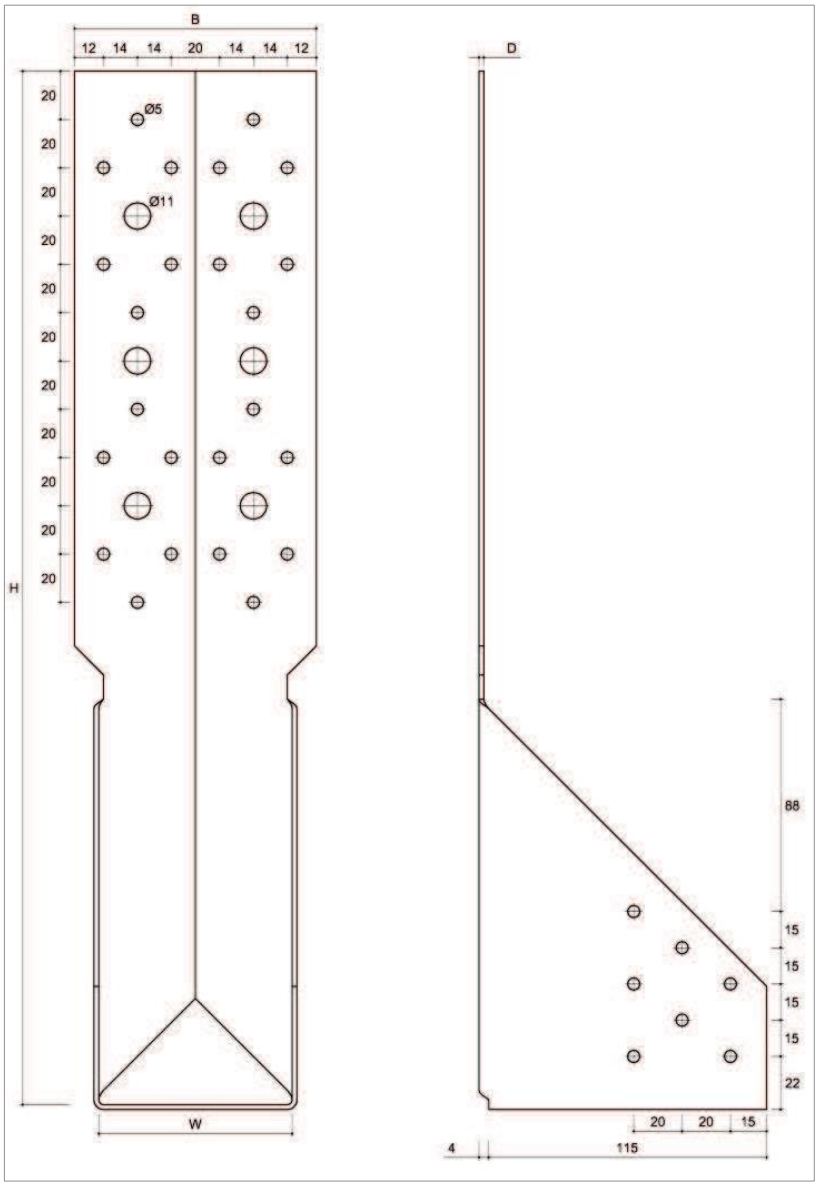

38 pav. Tipas WBC 80

17 lentelė WBC trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
WBC 80	80	428	100	2	38	6
WBC 92	92	443	114	2	42	8
WBC 100	100	443	120	2	42	8
WBC 120	120	505	148	2	48	10
WBC 137	137	515	160	2	52	12

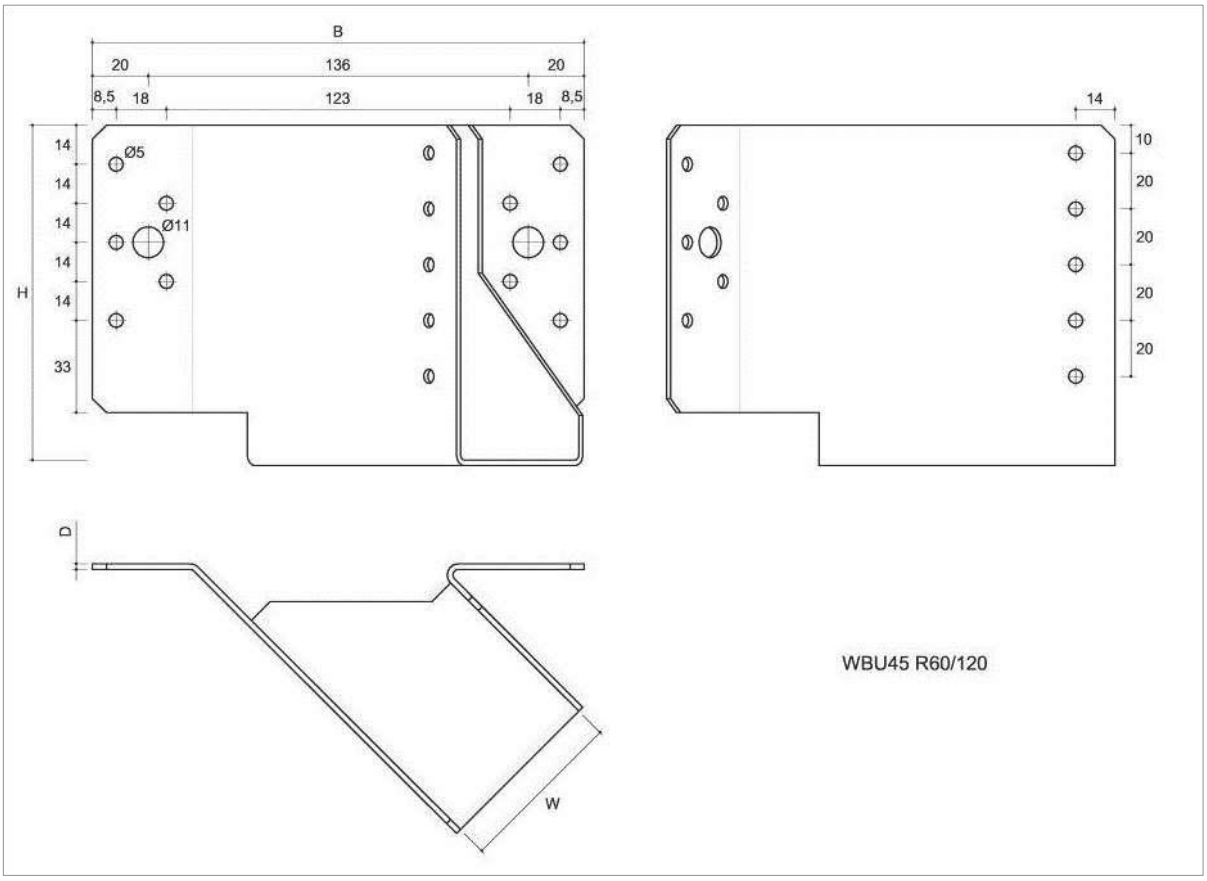

39 pav. Tipas WBU 45 R60/120

18 lentelė WBU45 trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 11
WBU45 R45/105 WBU45 L45/105	45	105	155	2	12	2
WBU45 R50/105 WBU45 L50/105	50	105	162	2	12	2
WBU45 R60/120 WBU45 L60/120	60	120	176	2	15	2

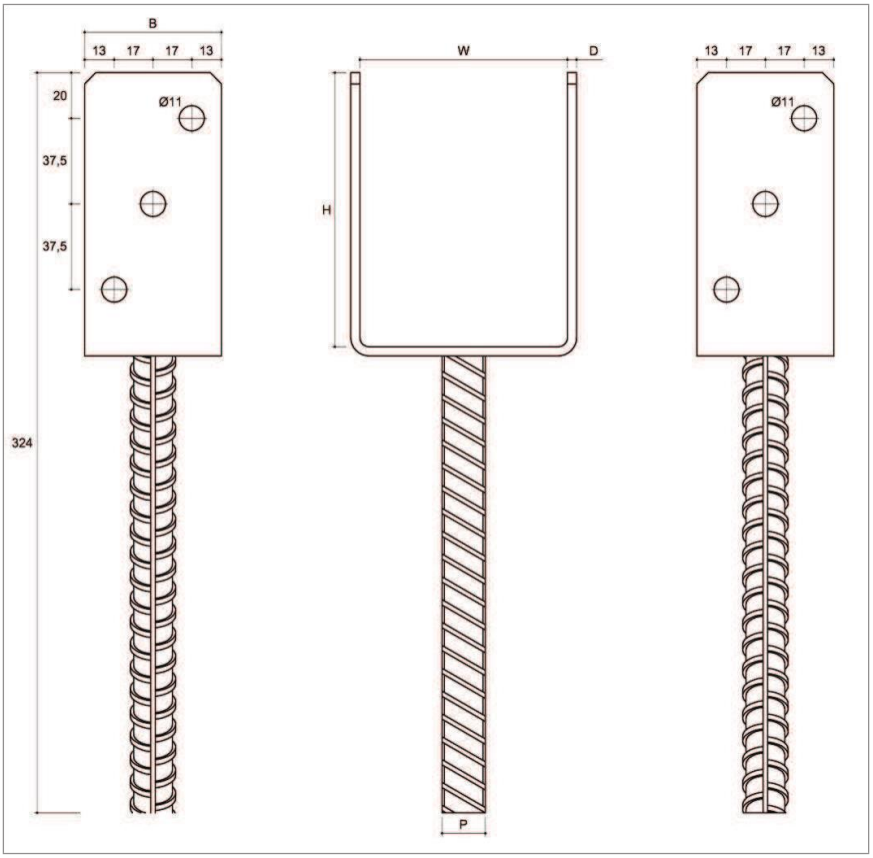

40 pav. Tipas PS 90

19 lentelė PS trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm					Angų kiekis
	W	H	B	D	P	ø 11
PS 60	61	120	60	4	ø 16	6
PS 70	71	120	60	4	ø 16	6
PS 80	81	120	60	4	ø 18	6
PS 90	91	120	60	4	ø 18	6
PS 100	101	120	60	4	ø 18	6
PS 120	121	120	60	4	ø 18	6
PS 140	141	120	60	4	ø 18	6

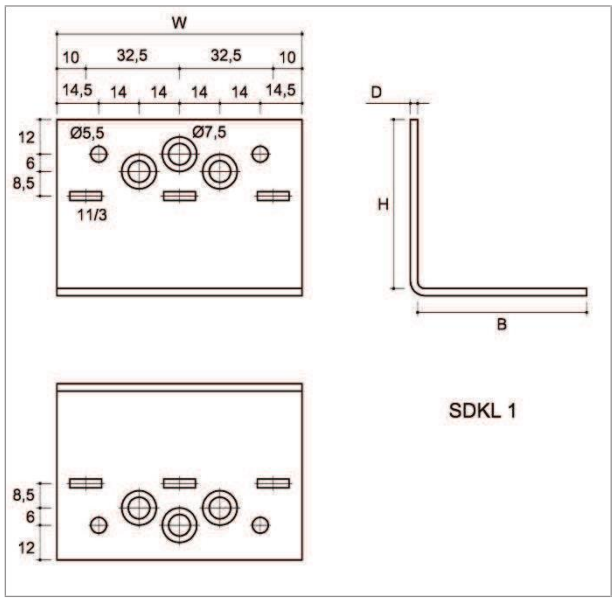

41 pav. Tipas SDKL 1

20 lentelė SDKL trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis		
	W	H	B	D	ø 5,5	ø 7,5	11/3
SDKL 1	85	58	58	2,5	4	6	6

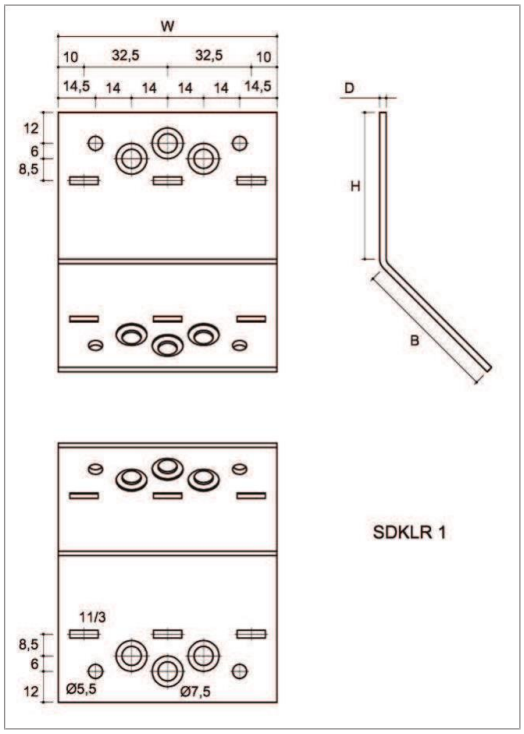

42 pav. Tipas SDKLR 1

21 lentelė SDKLR trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis		
	W	H	B	D	ø 5,5	ø 7,5	11/3
SDKLR 1	85	57	57	2,5	4	6	6

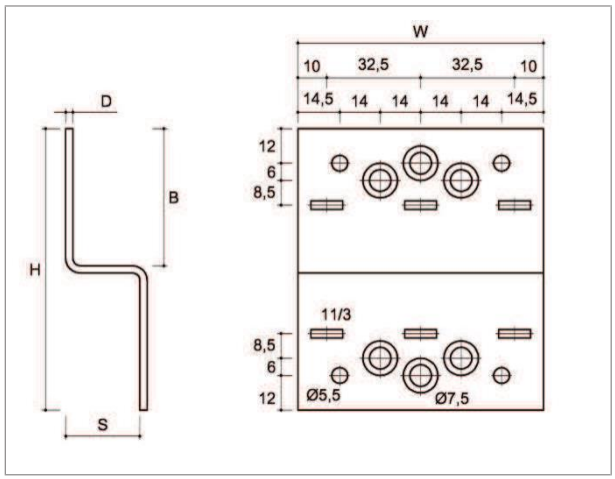

43 pav. Tipas SDLZ 1

22 lentelė SDLZ 1 trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm					Angų kiekis		
	W	H	B	S	D	ø 5,5	ø 7,5	11/3
SDLZ 1	85	96,5	47	24	2,5	4	6	6

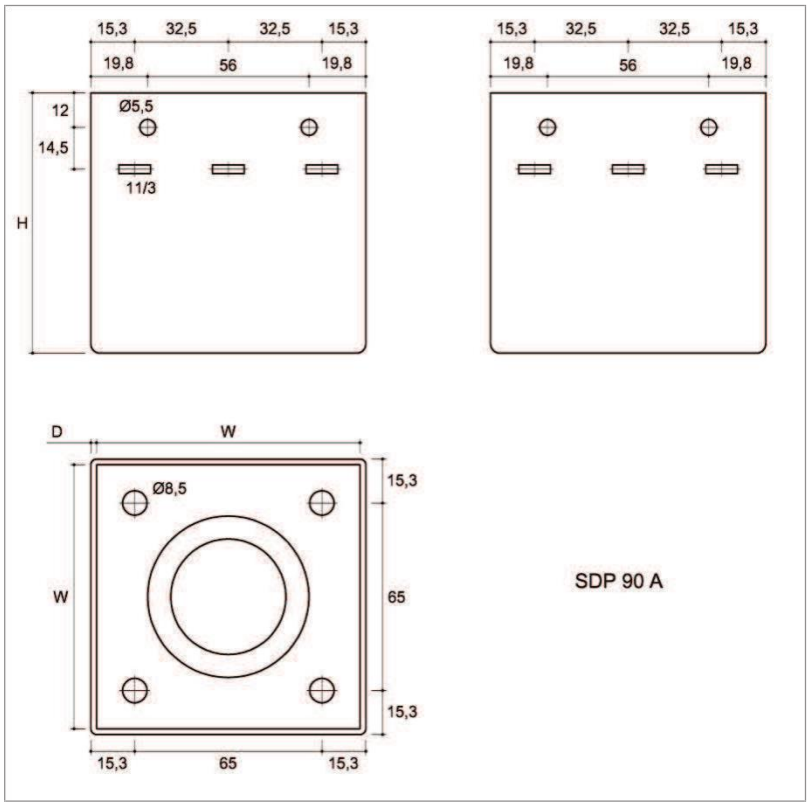

44 pav. Tipas SDP 90 A

23 lentelė SDP 90 A trimatės kalamos plokštelės simboliai ir matmenys


Simbolis	Matmenys, mm			Angų kiekis		
	W	H	D	ø 5,5	ø 8,5	11/3
SDP 90 A	91	90	2	8	4	12
SDP 100 A	101	90	2	8	4	12
SDP 120 A	121	90	2	8	4	12

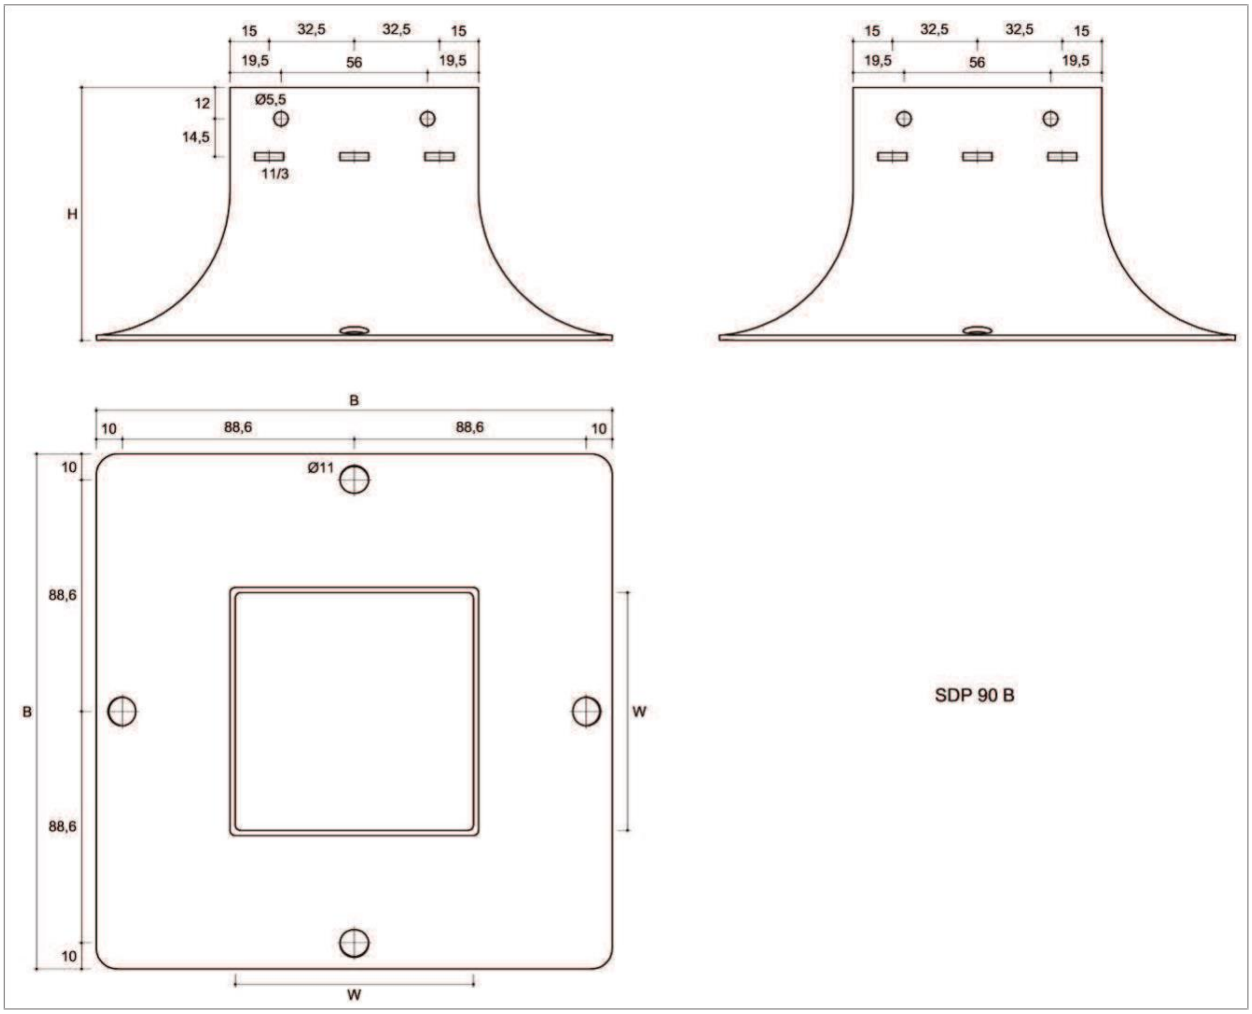

45 pav. Tipas SDP 90 B

24 lentelė SDP 90 B trimatės įkalamos plokštelės simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis		
	W	H	D	B	ø 5,5	ø 11	11/3
SDP 90 B	91	97	2	197	8	4	12
SDP 100 B	101	97	2	207	8	4	12
SDP 120 B	121	97	2	227	8	4	12

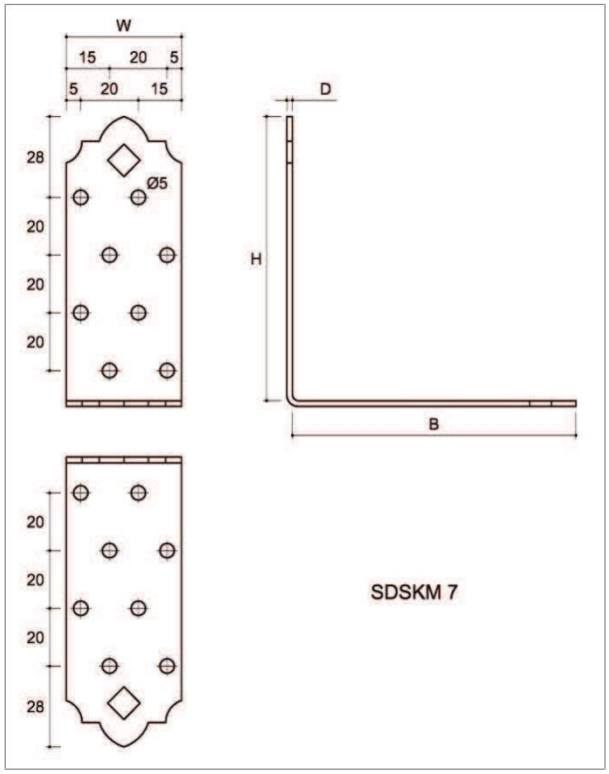


46 pav. Tipas SDSKM 7

25 lentelė SDSKM trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis
	W	H	B	D	ø 5
SDSKM 7	40	98	98	2	16

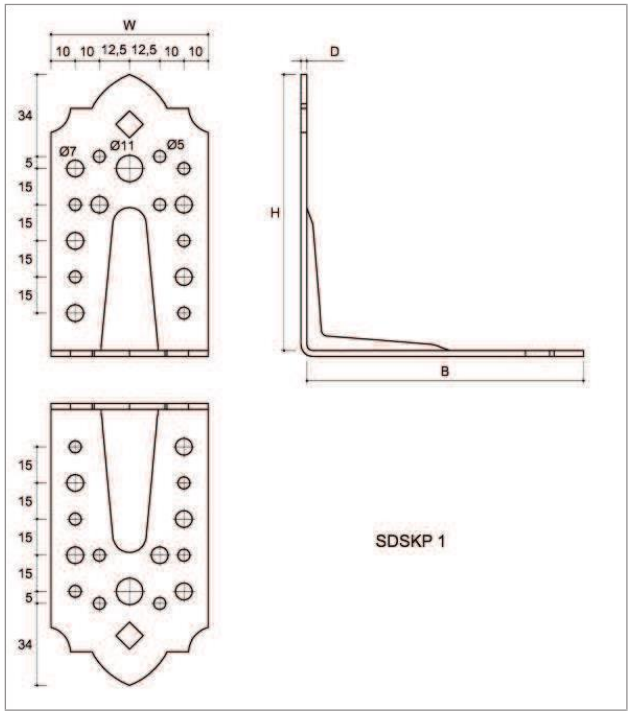


47 pav. Tipas SDSKP 1

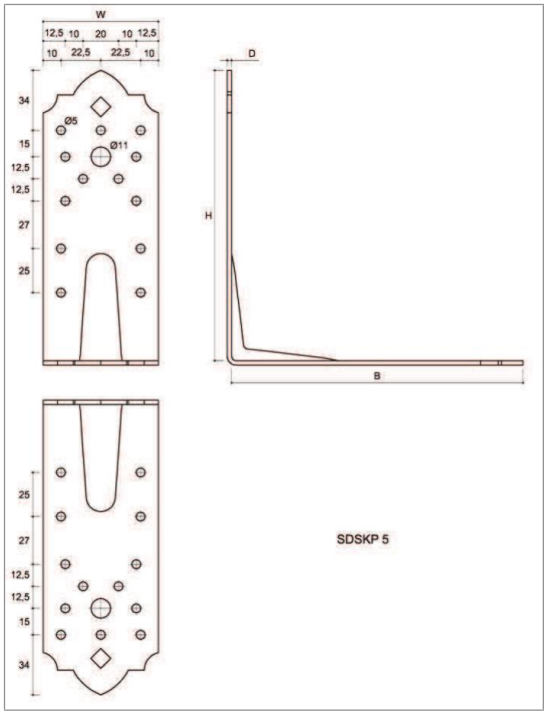


48 pav. Tipas SDSKP 5

26 lentelė SDSKP trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis		
	W	H	B	D	ø 5	ø 7	ø 11
SDSKP 1	65	115	115	2,5	16	12	2
SDSKP 5	65	165	165	2,5	26	-	2

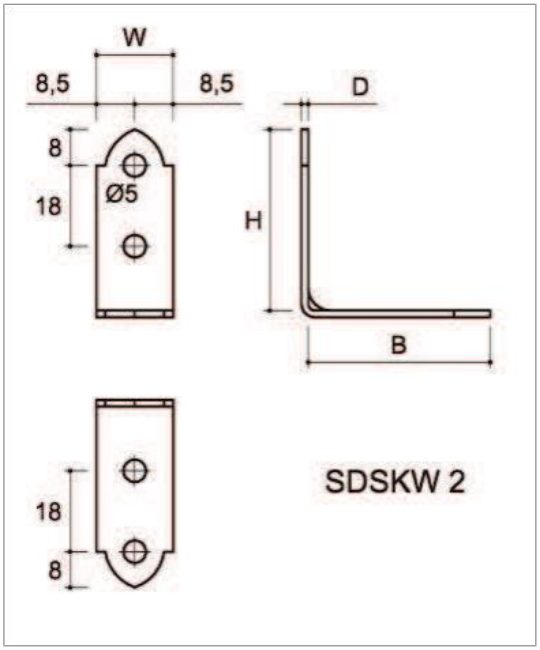


49 pav. Tipas SDSKW 2

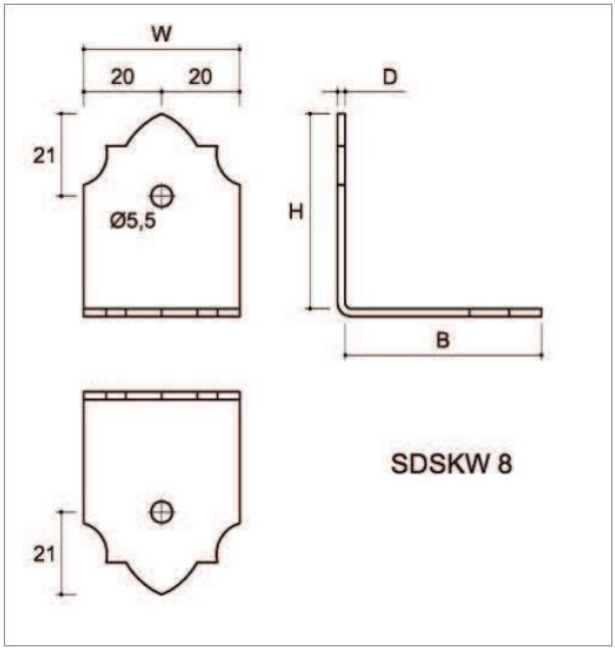

50 pav. Tipas SDSKW 8

27 lentelė SDSKW trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm				Angų kiekis	
	W	H	B	D	ø 5	ø 5,5
SDSKW 2	17	40	40	1,5	4	-
SDSKW 8	40	50	50	2	-	2

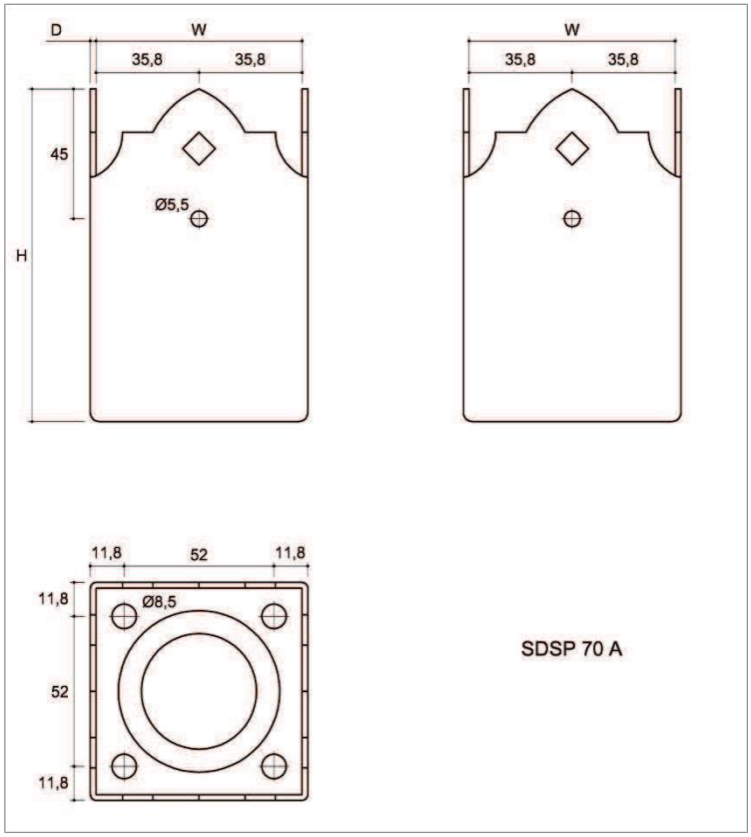

51 pav. Tipas SDSP 70 A

28 lentelė SDSP trimačių įkalamų plokštelių simboliai ir matmenys


Simbolis	Matmenys, mm			Angų kiekis	
	W	H	D	ø 5,5	ø 8,5
SDSP 70 A	71	115	2	4	4

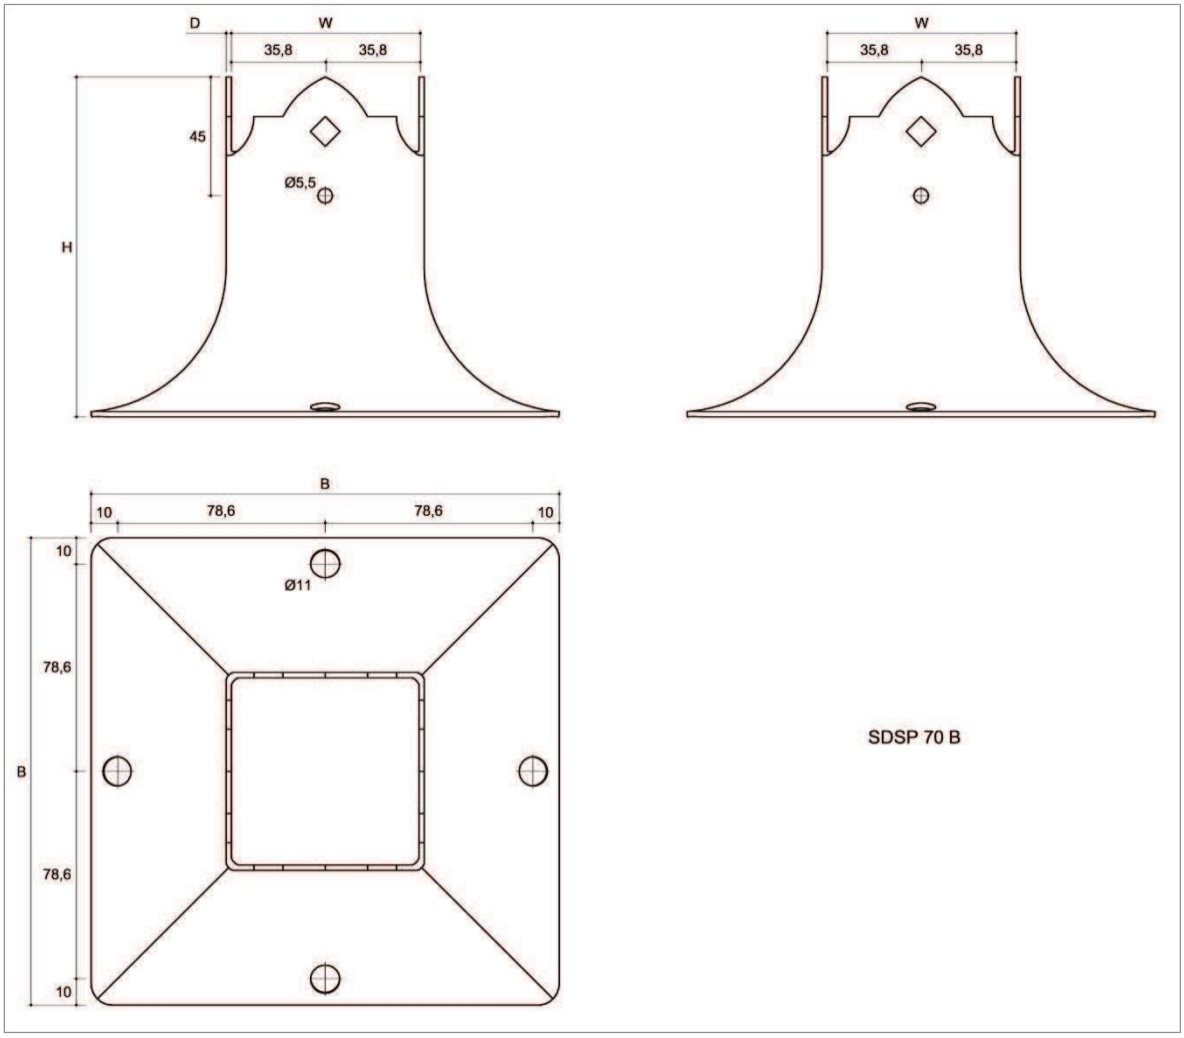


52 pav. Tipas SDSP 70B

29 lentelė SDSP trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm				Angų kiekis	
	W	H	D	B	ø 5,5	ø 11
SDSP 70 B	71	129	2	177	4	4

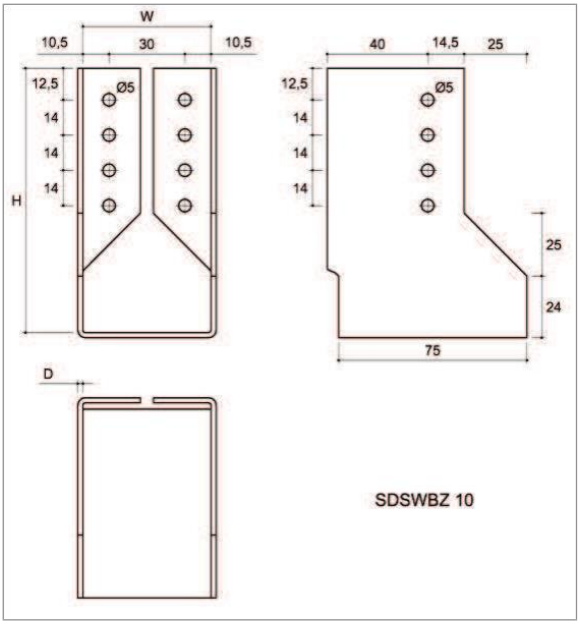

53 pav. Tipas SDSWBZ 10

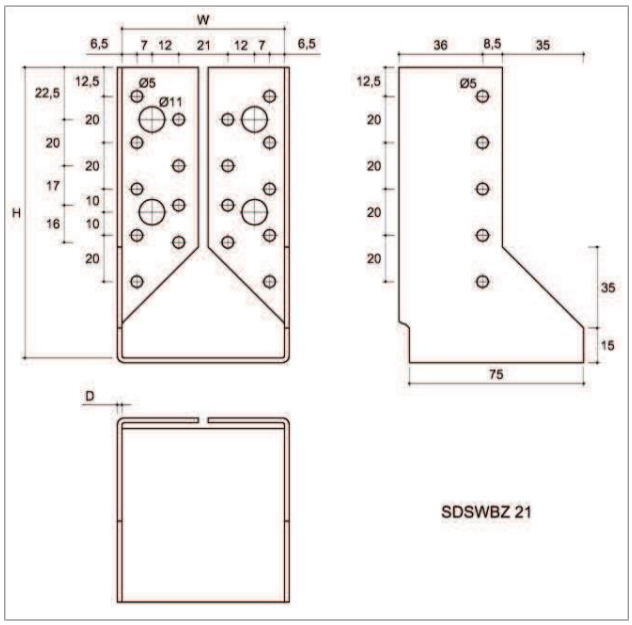


54 pav. Tipas SDSWBZ 21

30 lentelė SDSWBZ trimačių įkalamų plokštelių simboliai ir matmenys

Simbolis	Matmenys, mm			Angų kiekis	
	W	H	D	ø 5	ø 11
SDSWBZ 10	51	105	2	16	-
SDSWBZ 11	51	135	2	24	-
SDSWBZ 14	60	100	2	16	-
SDSWBZ 21	70	125	2	28	4
SDSWBZ 26	80	120	2	28	4
SDSWBZ 30	100	140	2	34	4

MASKAVIMO ELEMENTAI

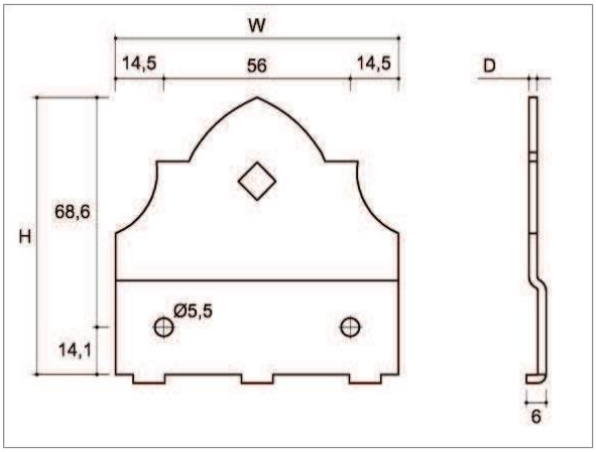


55 pav. Tipas SDD 85 A

31 lentelė SDD maskavimo elementai ir matmenys

Simbolis	Matmenys, mm			Angų kiekis
	W	H	D	ø 5,5
SDD 85 A	85	83	2,5	2
SDD 85 B	85	83	2,5	2


JUNGIMO ELEMENTAI

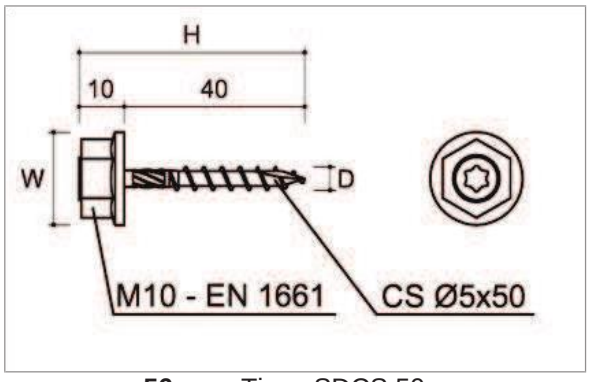

56 pav. Tipas SDCS 50

32 lentelė SDCS kaiščio tipo jungties simboliai ir matmenys


Simbolis	Matmenys, mm		
	W	H	D
SDCS 50	20,5	50	5,2

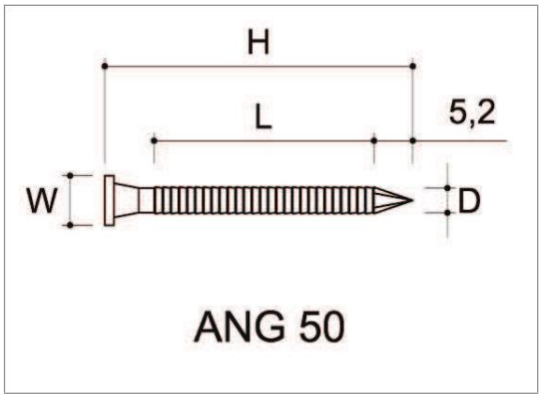

57 pav. Tipas ANG 50

33 lentelė Tvirtinimo kaiščio tipo jungties simboliai ir matmenys


Simbolis	Matmenys, mm			
	D	H	L	W
ANG 40	4	40	26,8	8
ANG 50	4	50	36,8	8

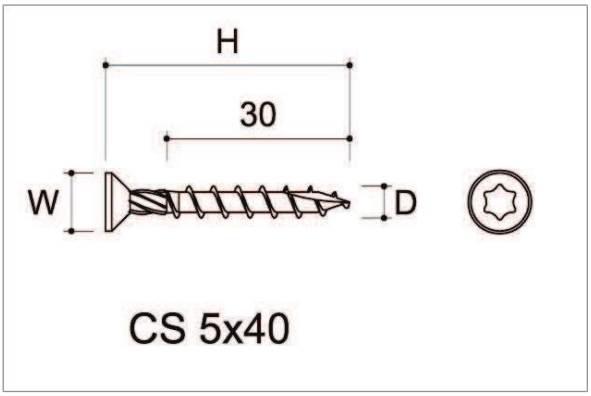

58 pav. Tipas CS 5x40

34 lentelė CS kaiščio tipo jungties simboliai ir matmenys


Simbolis	Matmenys, mm		
	D	H	W
CS 5x40	5	40	9,5
CS 5x50	5	50	9,5

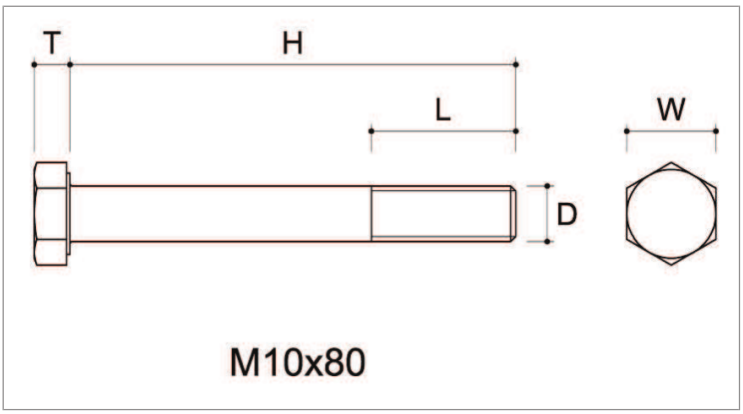

59 pav. Tipas M10x80

35 lentelė M varžto tipo jungties simboliai ir matmenys

Simbolis	Matmenys, mm					Standartas
	D	H	L	W	T	
M5x16	M5	16	16	8	3,5	ISO 4017
M10x80	M10	80	26	16	6,4	ISO 4014
M12x90	M12	90	30	18	7,5	ISO 4014
M16x160	M16	160	44	24	10	ISO 4014

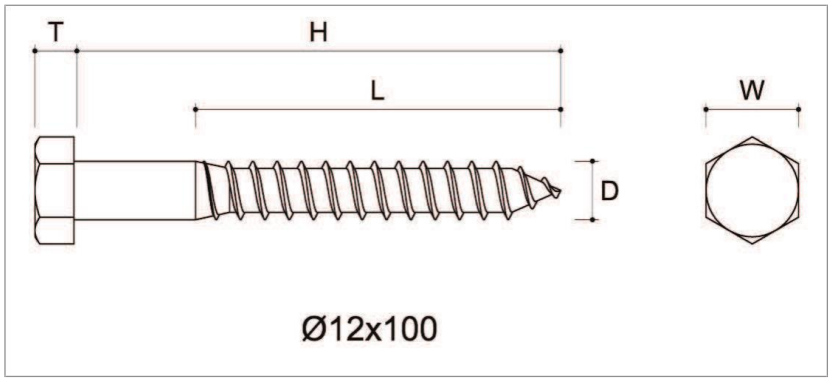

60 pav. Tipas Ø12x100


36 lentelė Ø12x100 tipo jungties simboliai ir matmenys

Simbolis	Matmenys, mm					Standartas
	D	H	L	W	T	
Ø12x100	12	100	75	19	8	DIN 571


2 PRIEDAS

APKROVOS PAGAL STATINES DIAGRAMAS


(pasirinktiems elementams)

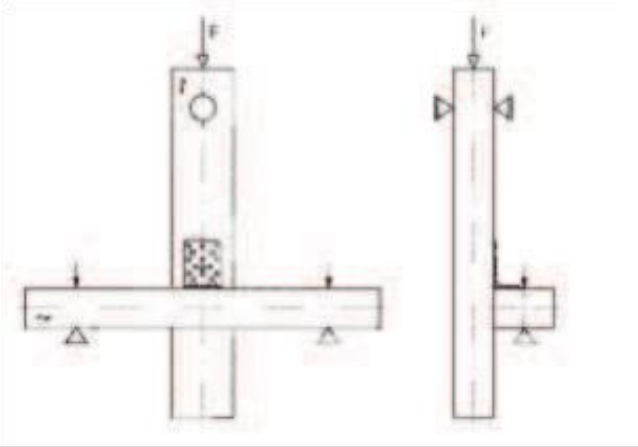Nr.	Diagrama	Jungties tipai
1		KPK 11, 12, 13, 21, 22, 23 KPL 5, 6, 11, 21 KR 1, 2, 3 KRD 5, 6


61 pav. 1 diagrama

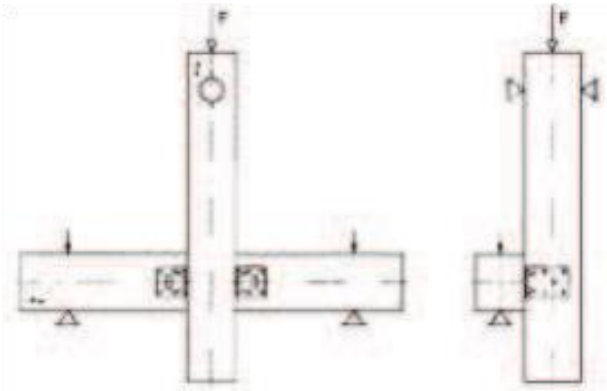Nr.	Diagrama	Jungties tipai
2		KPK 31 KPK 32 KPK 33


62 pav. 2 diagrama

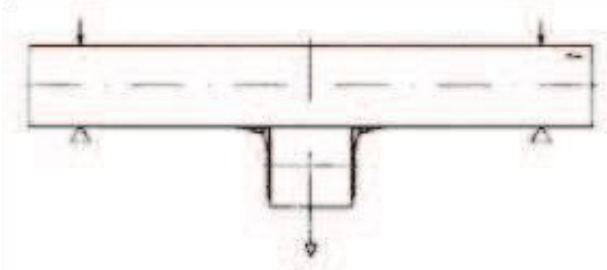Nr.	Diagrama	Jungties tipai
3		KP 7 KP 8


63 pav. 3 diagrama

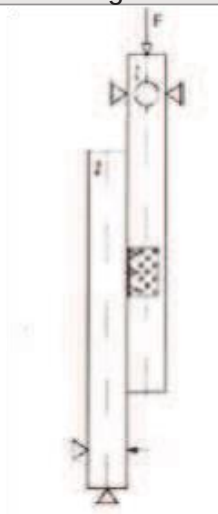Nr.	Diagrama	Jungties tipai
4		KPK 4


64 paveikslas 4 diagrama

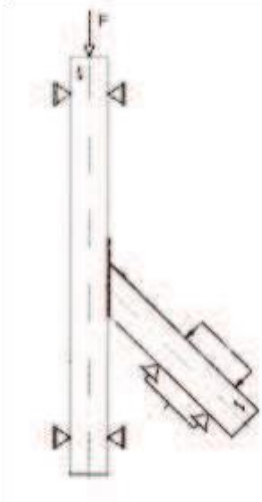Nr.	Diagrama	Jungties tipai
5		KLR 1 KLR 2 KLR 3 KLR 4 KLR 5 KLR 6


65 pav. 5 diagrama

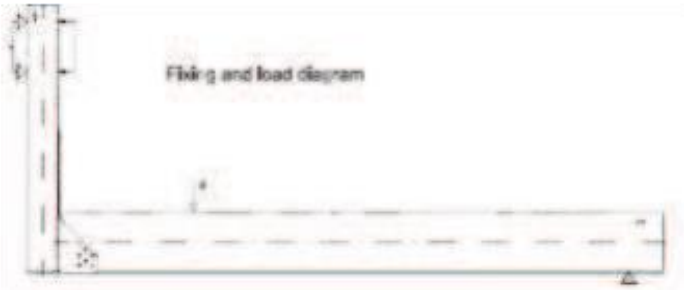Nr.	Diagrama	Jungties tipai
6		WBC 80 WBC 92 WBC 100 WBC 120 WBC 137

66 pav. 6 diagrama

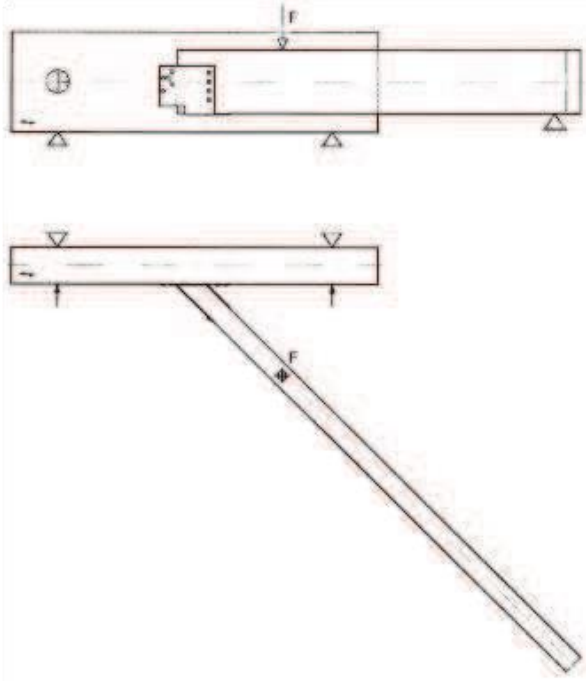Nr.	Diagrama	Jungties tipai
7		WBU 45 R45-105; L45-105 R50-105; L50-105 R60-120; L60-120


67 pav. 7 diagrama

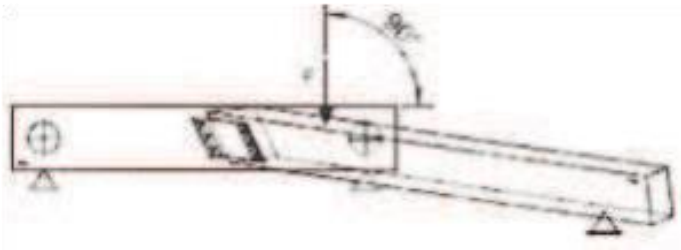Nr.	Diagrama	Jungties tipai
8		LU 25 R80; L80 R120; L120


68 pav. 8 diagrama

SKAIČIAVIMAI PAGAL STATINES DIAGRAMAS


(pasirinktiems elementams)

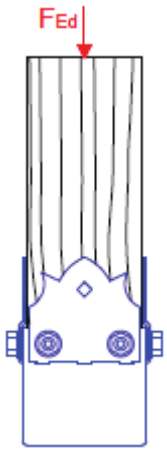Nr.	Diagrama	Jungties tipai
9		SDP 90 A SDP 100 A SDP 120 A


69 pav. 9 diagrama

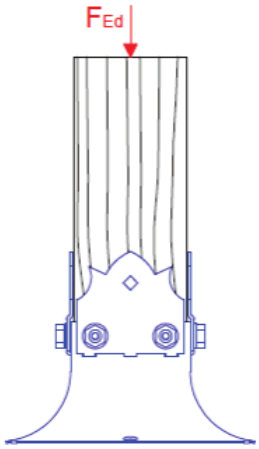Nr.	Diagrama	Jungties tipai
10		SDP 90 B SDP 100 B SDP 120 B


70 pav. 10 diagrama

Nr.	Diagrama	Jungties tipai
11		SDSP 70 A


71 pav. 11 diagrama

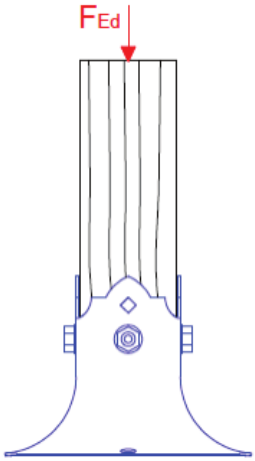Nr.	Diagrama	Jungties tipai
12		SDSP 70 B


72 pav. 12 diagrama

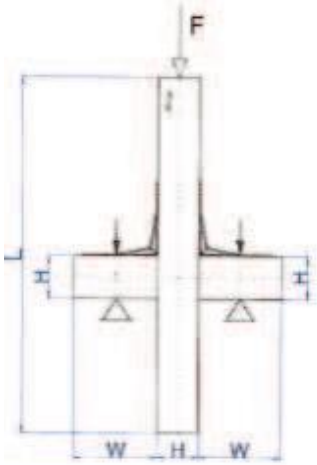Nr.	Diagrama	Jungties tipai
13		KPS 1 KPS 2 KPS 3 KPS 4


73 pav. 13 diagrama

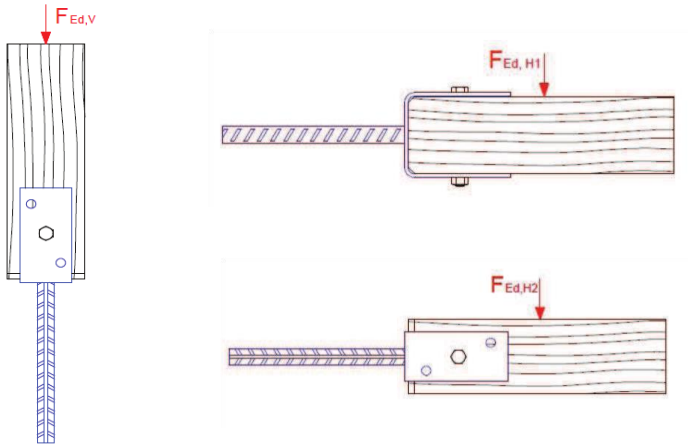Nr.	Diagrama	Jungties tipai
14		PS 60 PS 70 PS 80 PS 90 PS 100 PS 120 PS 140


74 pav. 14 diagrama

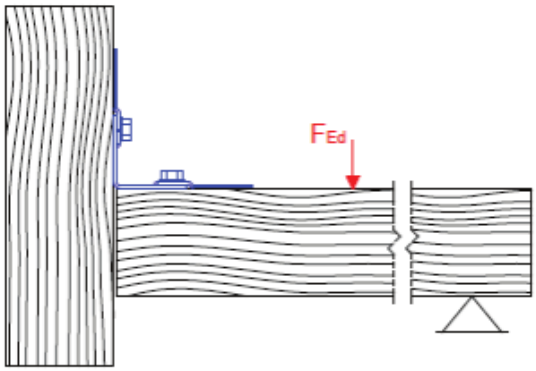Nr.	Diagrama	Jungties tipai
15		SDKL 1 ištraukimas


75 pav. 15 diagrama

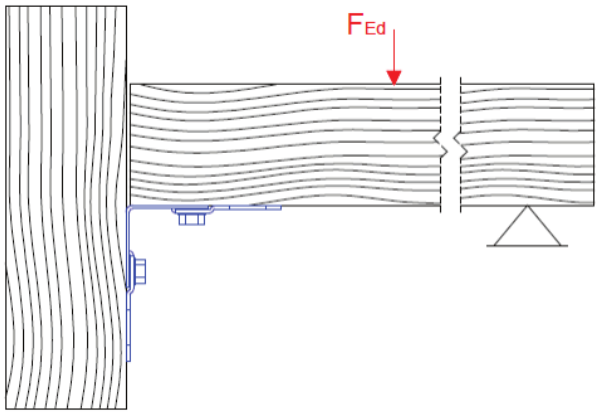Nr.	Diagrama	Jungties tipai
16		SDKL 1 spaudimas


76 pav. 16 diagrama

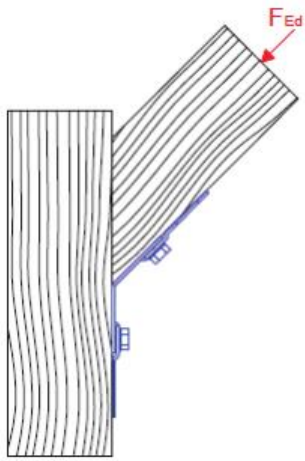Nr.	Diagrama	Jungties tipai
17		SDKLR 1

77 pav. 17 diagrama

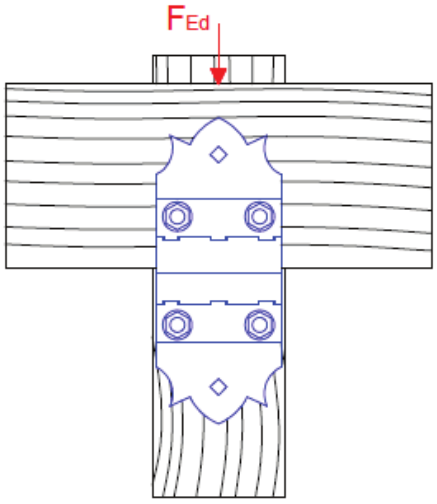Nr.	Diagrama	Jungties tipai
18		SDLZ 1

78 pav. 18 diagrama

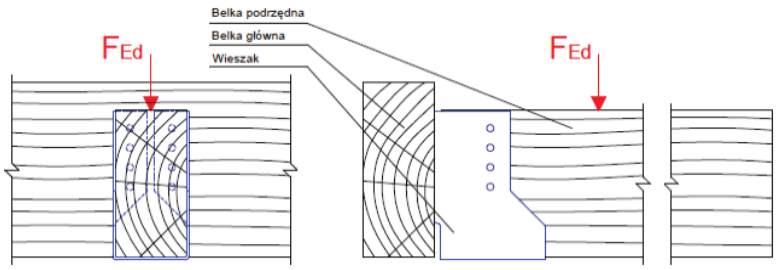Nr.	Diagrama	Jungties tipai
19		SDSWBZ 10 SDSWBZ 11 SDSWBZ 14 SDSWBZ 21 SDSWBZ 26 SDSWBZ 30

79 pav. 19 diagrama

3 PRIEDAS

BŪDINGOS JUNGČIŲ APKROVOS

37 lentelė

Tipų grupė	Tipas	Medienos drėgmė [%]	Tankis ρ_{vid}, 12 % [kg·m^{-3}]	$P_{max, vid}$ [kN]	$P_{max, k}$ [kN]	Pastaba Nr.
KP	KP 7	16,9	428,2	18,34	12,5	1
	KP 8	23,0	411,7	20,62	12,9	1
KPL	KPL 5	15,2	421,2	8,09	6,8	2
	KPL 6	12,9	422,8	9,49	6,2	2
	KPL 11	14,9	452,1	18,43	13,0	2
	KPL 21	15,6	472,7	21,23	17,1	2
KPK	KPK 4	14,3	416,8	15,85	12,7	2
	KPK 11	17,7	460,8	13,00	10,4	2
	KPK 12	14,3	460,9	17,32	13,5	2
	KPK 13	13,4	398,2	22,13	16,7	2
	KPK 21	12,3	468,5	13,53	10,8	2
	KPK 22	11,3	407,5	13,14	10,6	2
	KPK 23	11,3	460,9	12,79	9,0	2
	KPK 31	13,6	436,6	12,44	9,3	3
	KPK 32	12,2	424,8	12,62	10,5	3
	KPK 33	15,4	415,4	13,66	10,5	3
KLR	KLR 1	13,8	422,2	5,71	4,2	2
	KLR 2	15,5	429,7	10,95	7,9	2
	KLR 3	15,5	407,1	10,59	8,3	2
	KLR 4	15,7	468,1	6,35	5,1	2
	KLR 5	15,3	410,8	15,41	13,6	2
	KLR 6	16,0	497,6	9,98	7,2	2
KR	KR 1	13,4	438,8	6,74	5,1	2
	KR 2	14,6	396,2	12,29	6,7	2
	KR 3	14,7	408,7	7,53	6,3	2
WBC	WBC 80	14,7	423,2	42,06	34,9	2
	WBC 92	16,8	424,0	42,79	36,1	2
	WBC 100	14,9	423,6	42,71	26,8	2
	WBC 120	16,7	414,3	47,22	29,2	2
	WBC 137	14,9	428,4	52,44	42,1	2
WBU	WBU 45 R45-105	15,6	385,4	16,96	11,0	2
	WBU 45 R50-105	14,5	387,0	16,43	12,4	2
	WBU 45 R60-120	14,9	423,8	21,47	16,5	2
KRD	KRD 5	16,1	453,8	9,65	6,1	2
	KRD 6	16,1	430,8	8,74	6,1	2
LU	LU 25 R80	14,7	436,5	9,07	6,1	2
	LU 25 R120	14,6	414,5	14,76	12,3	2

Pastabos:
1 Nurodytos jėgos, tenkančios vienai jungčiai (vienam kampiniam laikikliui), bandomąsias jungtis sudarė du jungiamieji elementai, visos jungtys yra dvigubai aukštesnės
2 Viena jungtis
3 Jėgos nurodytos visai jungčiai, sudarytai iš dviejų jungiamųjų elementų, todėl jėga vienam jungiamajam elementui (vienam kampiniam laikikliui) yra pusė nurodytos vertės.

BŪDINGOS JUNGČIŲ KELIAMOSIOS GALIOS (APKROVOS)

38 lentelė

Tipų grupė	Tipas	Medienos drėgmė [%]	Tankis ρ_{vid}, 12 % [kg·m^{-3}]	$P_{max,\ vid.}$ [kN]	$P_{max,\ k}$ [kN]	Pastaba Nr.
ŁB	ŁB 1	12,0	400,1	13,41	9,9	1
	ŁB 2	12,0	400,1	15,27	10,4	1
	ŁB 4	12,0	400,1	12,73	9,4	1
NT	NT 25			25,26	15,7	2
	NT 40			37,14	32,8	2
	NT 60			67,62	59,8	2
KKB	KKB 1	12,0	400,0	81,14	57,6	3

Pastabos:
1 Nurodytos jėgos yra skirtos vienam jungiamajam elementui, bandomąsias jungtis sudarė du jungiamieji elementai, todėl visos jungties jėga yra dvigubai didesnė už nurodytą
2 Vienas jungiamasis elementas yra įtemptas
3 Nurodytos jėgos yra skirtos visai jungčiai, bandomąsias jungtis sudarė du jungiamieji elementai, todėl jėga vienam jungiamajam elementui yra pusė nurodytos

BŪDINGOS JUNGČIŲ KELIAMOSIOS GALIOS (SKAIČIAVIMAI)

39 lentelė

Jungties tipas	Apkrova	Laikomoji galia [kN]		Nustatymo metodas	Dokumento Nr.
		Mediena	Plienas		
SDLZ 1	šlytis	3,6		skaičiavimas	KAO-O-SOD-13
SDKLR 1	įstriža	3,3		skaičiavimas	KAO-O-SOD-12
SDKL 1	ištraukimas		1,1	skaičiavimas	KAO-O-SOD-10
	spaudimas	3,3		skaičiavimas	KAO-O-SOD-11
SDSP 70 A	spaudimas	34,8		skaičiavimas	KAO-O-SOD-23
SDSP 70 B	spaudimas	108,6		skaičiavimas	KAO-O-SOD-24
SDP 90 A	spaudimas	39,6		skaičiavimas	KAO-O-SOD-15
SDP 90 B	spaudimas	180,6		skaičiavimas	KAO-O-SOD-17
SDP 100 A	spaudimas	39,6		skaičiavimas	KAO-O-SOD-15
SDP 100 B	spaudimas	220,5		skaičiavimas	KAO-O-SOD-17
SDP 120 A	spaudimas	39,6		skaičiavimas	KAO-O-SOD-15
SDP 120 B	spaudimas	312,9		skaičiavimas	KAO-O-SOD-17
SDSKW 2	spaudimas	3,3		bandymas	KAO-O-SOD-21
SDSKW 8	spaudimas	3,5		bandymas	KAO-O-SOD-22
SDSKP 1	spaudimas	17,8		bandymas	KAO-O-SOD-21
SDSKP 5	spaudimas	10,9		bandymas	KAO-O-SOD-21
SDSKM 7	spaudimas	5,8		bandymas	KAO-O-SOD-21
SDSWBZ 10	spaudimas	9,6		skaičiavimas	KAO-O-SOD-18
SDSWBZ 11	spaudimas	12,3		skaičiavimas	KAO-O-SOD-19
SDSWBZ 14	spaudimas	9,3		skaičiavimas	KAO-O-SOD-20
SDSWBZ 21	spaudimas	17,2		bandymas	KAO-O-SOD-21
SDSWBZ 26	spaudimas	17,2		bandymas	KAO-O-SOD-21
SDSWBZ 30	spaudimas	22,4		bandymas	KAO-O-SOD-21

BŪDINGOS JUNGČIŲ KELIAMOSIOS GALIOS (SKAIČIAVIMAI)

40 lentelė

Jungties tipas	Būdingoji laikomoji galia [kN]	Dokumento Nr.
	Mediena	
PS 60	4,1	BPS-0001/13
PS 70	4,3	BPS-0002/13
PS 80	6,9	BPS-0003/13
PS 90	6,2	BPS-0004/13
PS 100	6,7	BPS-0005/13
PS 120	8,2	BPS-0006/13
PS 140	7,5	BPS-0007/13
KPS 1	16,3	KE1-0009/14
KPS 2	18,7	KE1-0010/14
KPS 3	12,6	KE1-0011/14
KPS 4	11,6	KE1-0012/14

41 lentelė PS tipo jungties laikomosios galios apžvalga [kN]

Jungties tipas	Laikomoji galia $N_{Rd,V}$ [kN] (skaičiavimas)		Laikomoji galia $N_{Rd,H1}$ [kN] (skaičiavimas)		Laikomoji galia $N_{Rd,H2}$ [kN] (bandymas)
	Medienos laikomoji	Plieno laikomoji galia	Medienos laikomoji galia	Plieno laikomoji galia	
PS 60	61,7	51,7	12,2	6,9	4,7
PS 70	86,6	51,7	12,2	6,9	4,4
PS 80	99,2	57,3	12,2	9,6	7,7
PS 90	111,8	57,3	12,2	9,6	6,8
PS 100	124,4	57,3	12,2	9,6	7
PS 120	149,6	57,3	12,2	9,6	9,1
PS 140	174,8	57,3	12,2	9,6	7,8

$N_{Rd,V}$ – vertikali apkrovos jėga, $N_{Rd,H1}$ – horizontali apkrovos jėga,
$N_{Rd,H2}$ – vertikali apkrovos jėga lygiagreti pagrindo šonui
Dokumento Nr.: KAO-L-PS-01

Apkrovų deriniams ($F_{Ed,V}$, $F_{Ed,H1}$, $F_{Ed,H2}$) gali būti naudojamas tiesinis panaudojimo koeficientų sumavimas. Šis metodas gali būti taikomas laikantis šių kriterijų:

$$\frac{F_{Ed,V}}{N_{Rd,V}} + \frac{F_{Ed,H1}}{N_{Rd,H1}} + \frac{F_{Ed,H2}}{N_{Rd,H2}} \leq 1$$


4 PRIEDAS

VINIŲ KALIMO TVARKA


Į juodai pažymėtas angas visada būtina įkalti vinis. Tai vienintelė tinkama tvarka, nes per daug vinių arba per ilgi vinys gali susilpninti medieną, kai yra gana arti krašto (taisyklė pateikta žemiau).

Jei t>60 [mm]
Tada $0,5*t \geq t_1 \geq 0,35*t$


Jei t≤60 [mm]
Tada $0,9*t \geq t_1 \geq 0,7*t$

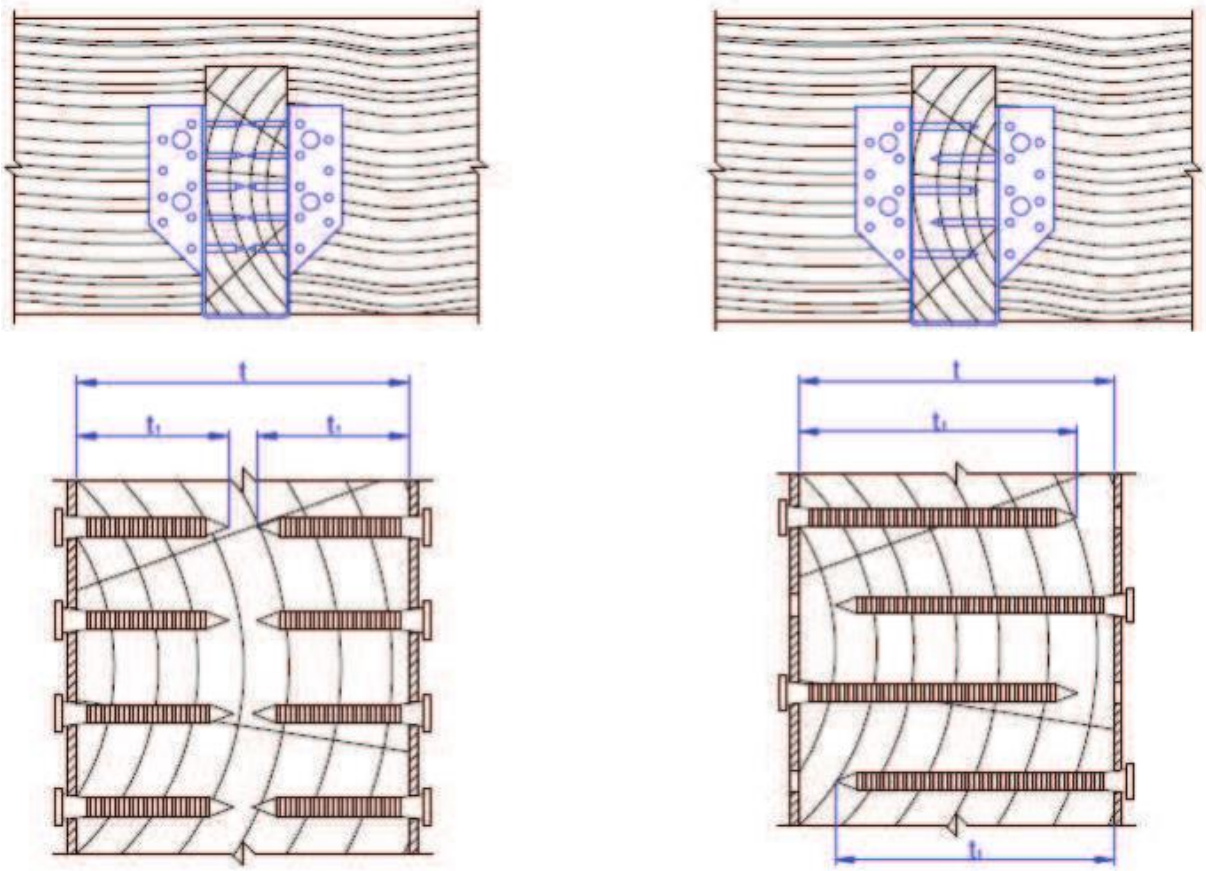


80 pav. Vinių kalimo taisyklė

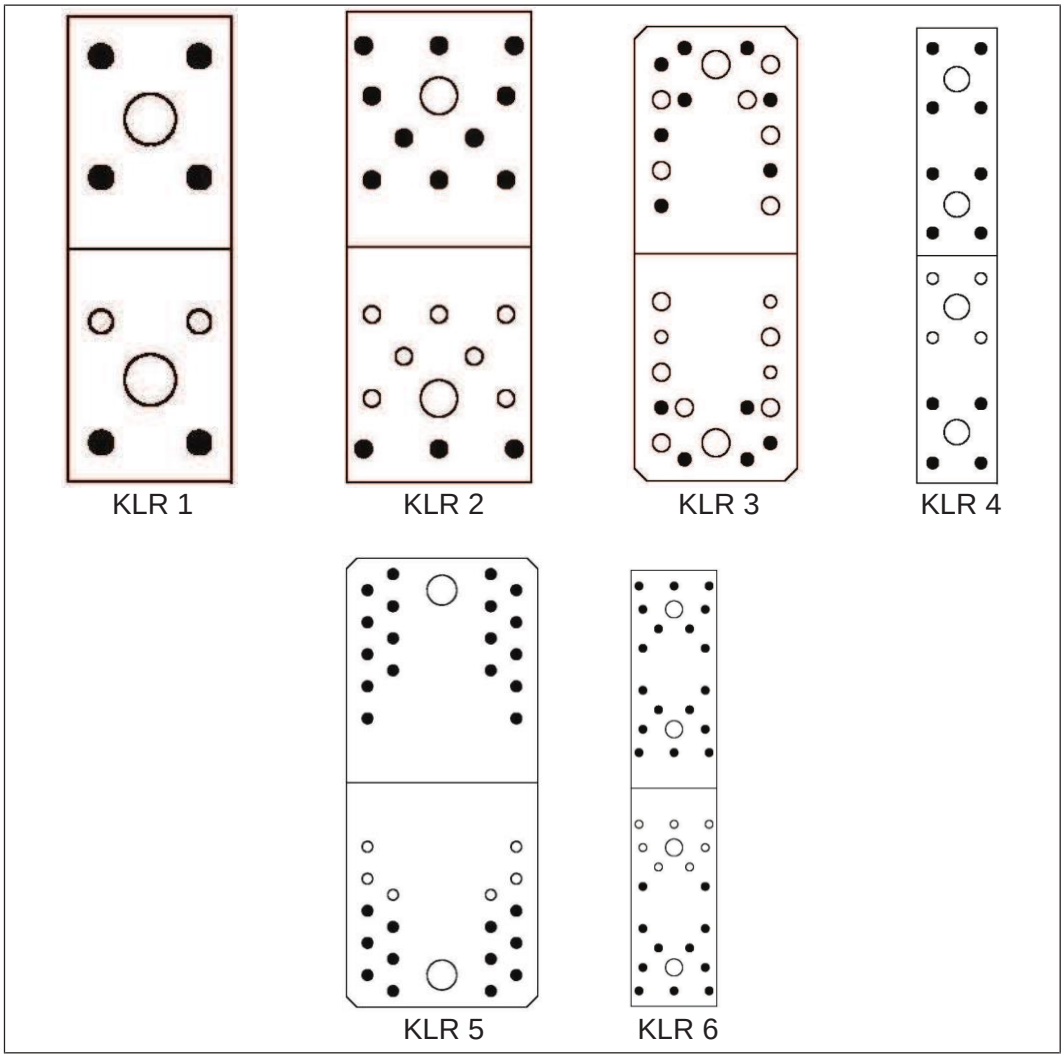


81 pav. Tipas KLR

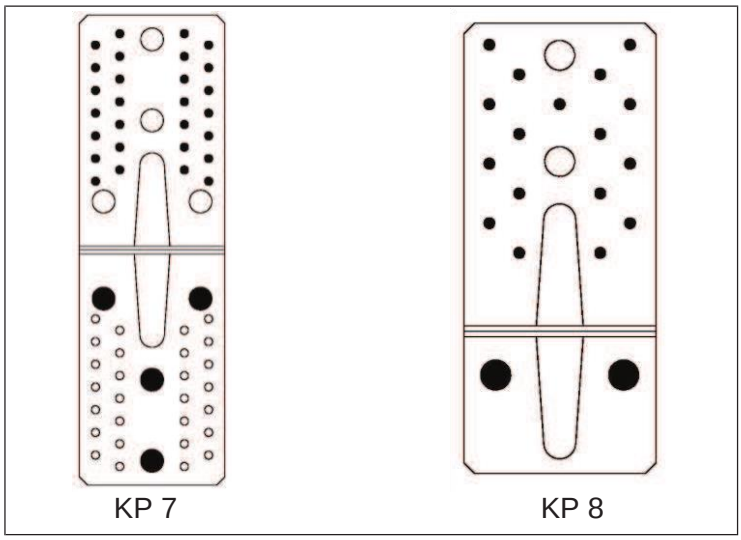



82 pav. Tipas KP

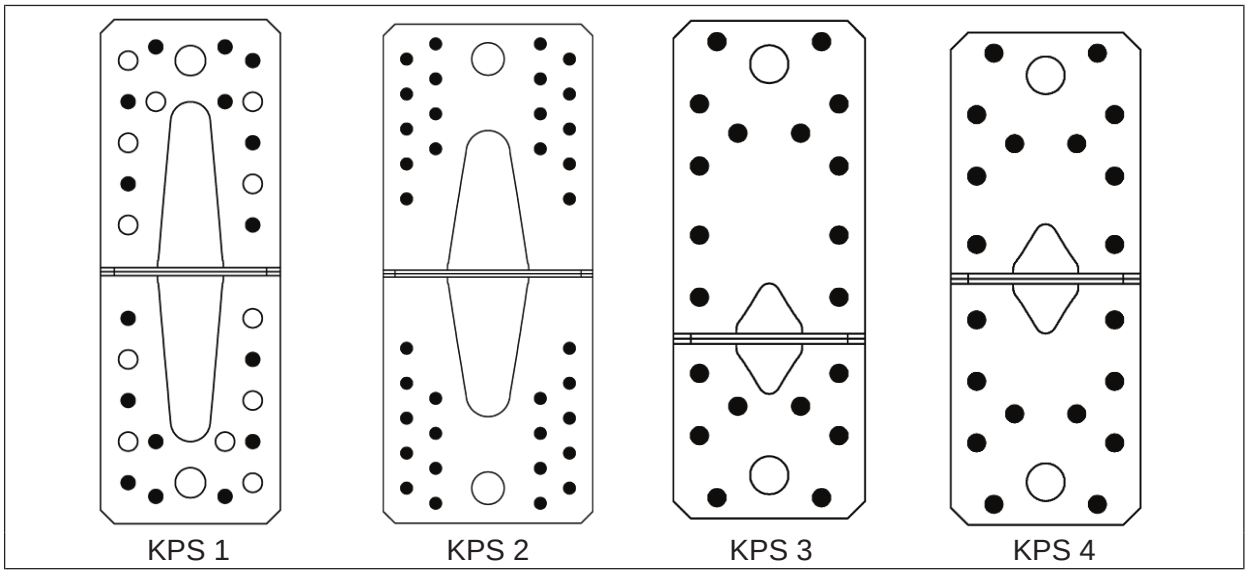


83 pav. Tipas KPS

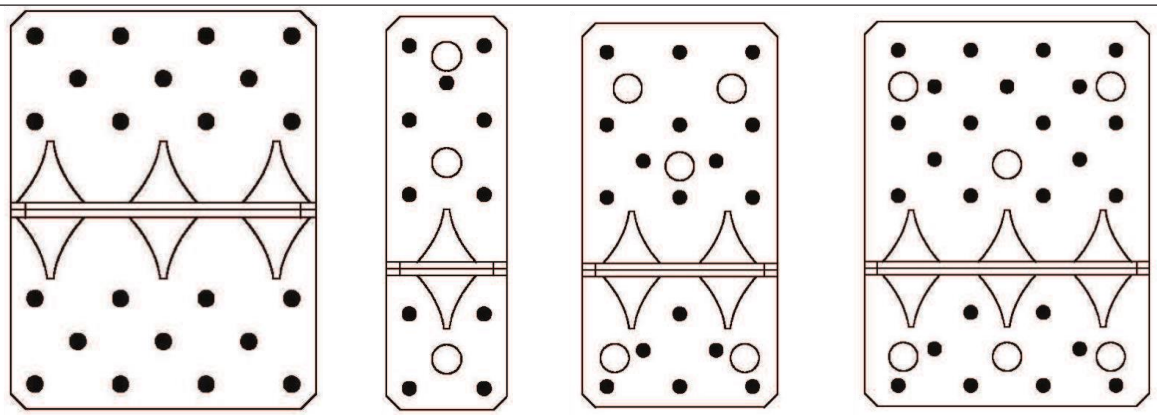

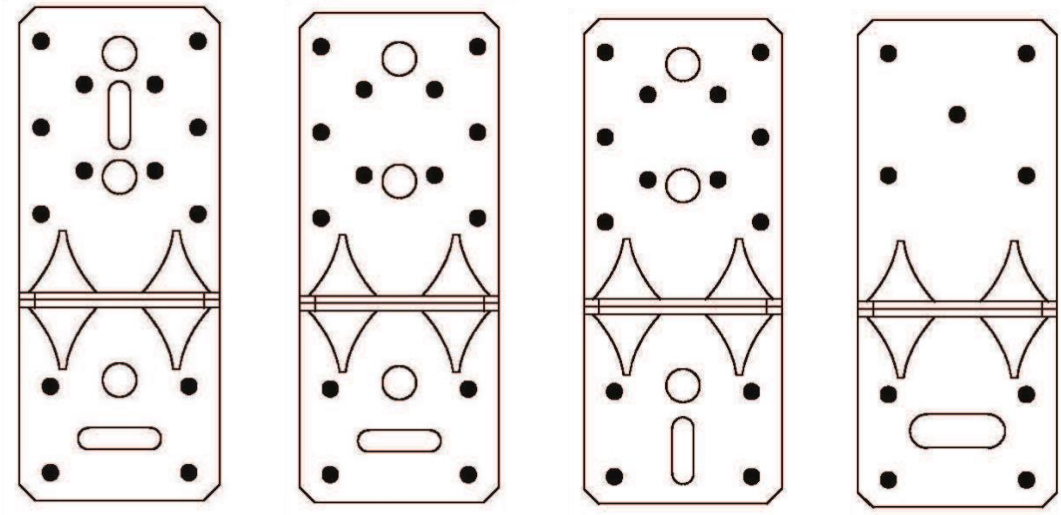


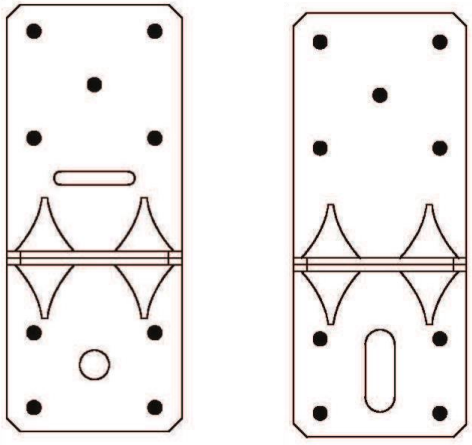


84 pav. Tipas KPK

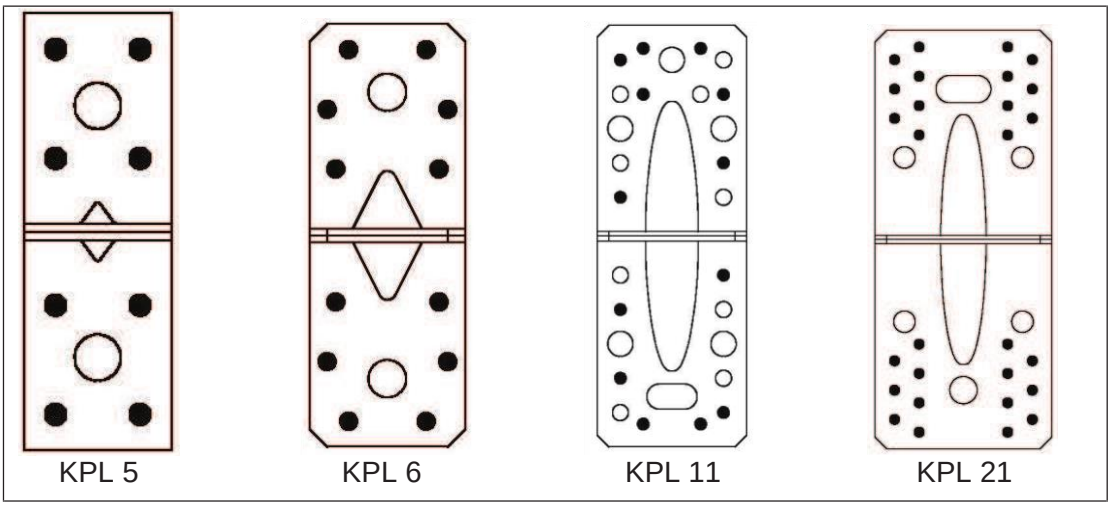


85 pav. Tipas KPL

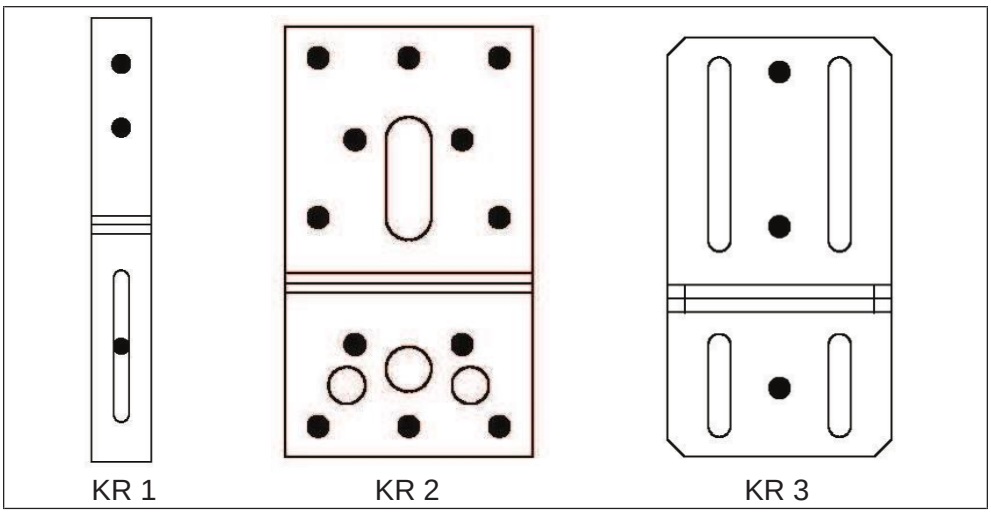


86 pav. Tipas KR

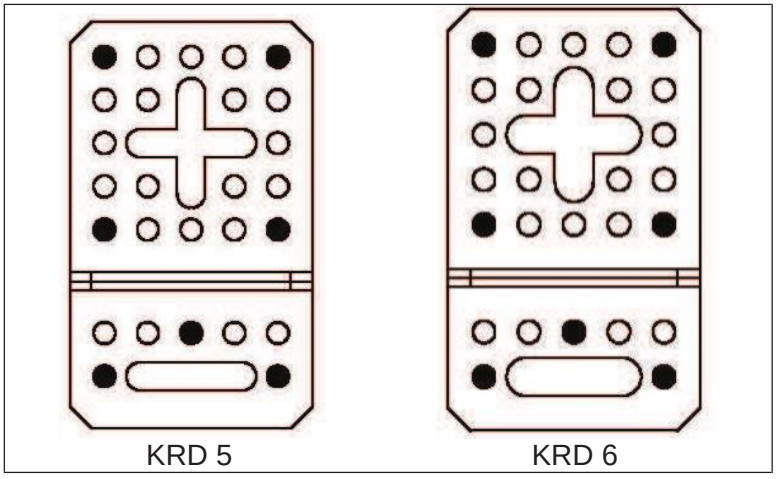


87 pav. Tipas KRD

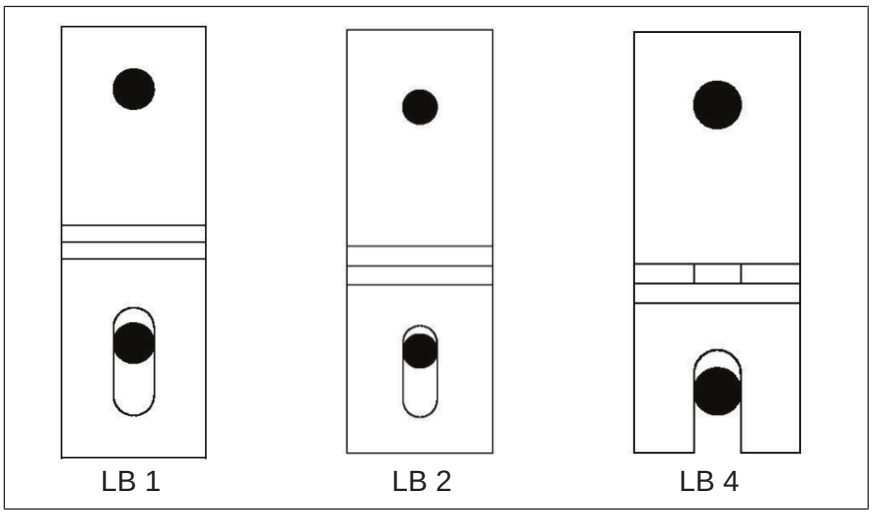


88 pav. Tipas LB

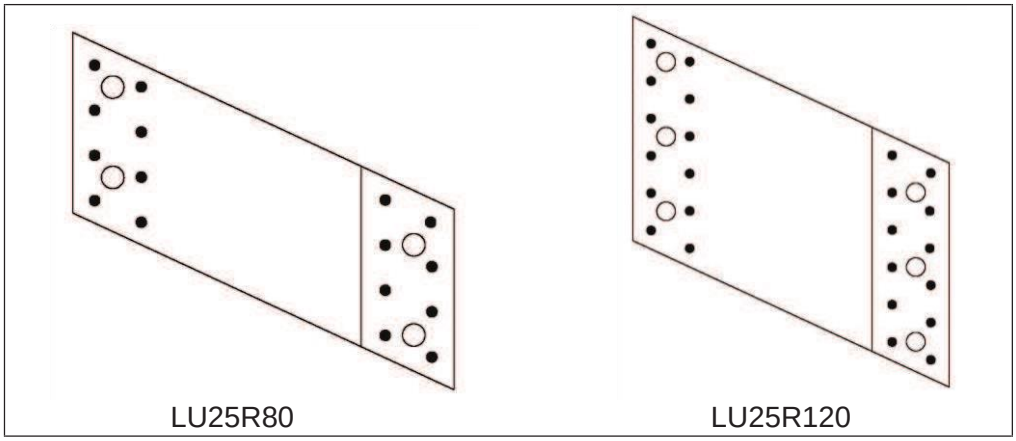


89 pav. Tipas LU

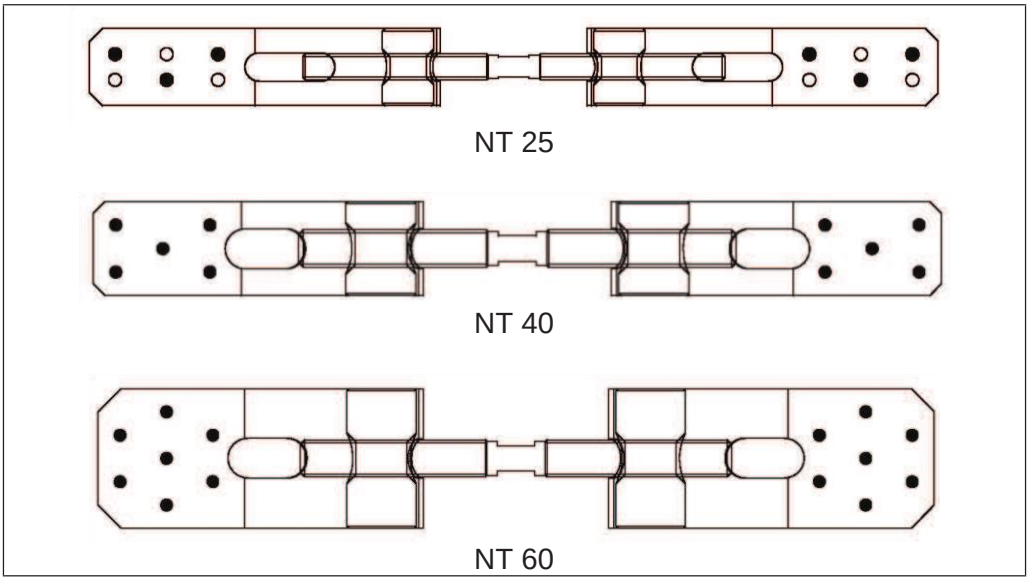


90 pav. Tipas NT

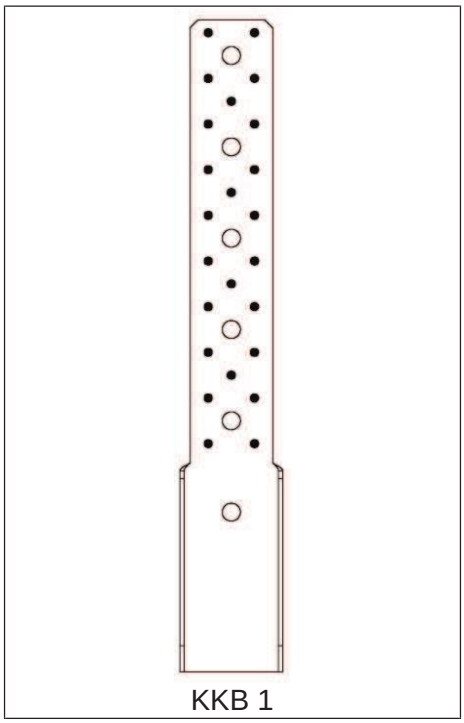


91 pav. Tipas KKB

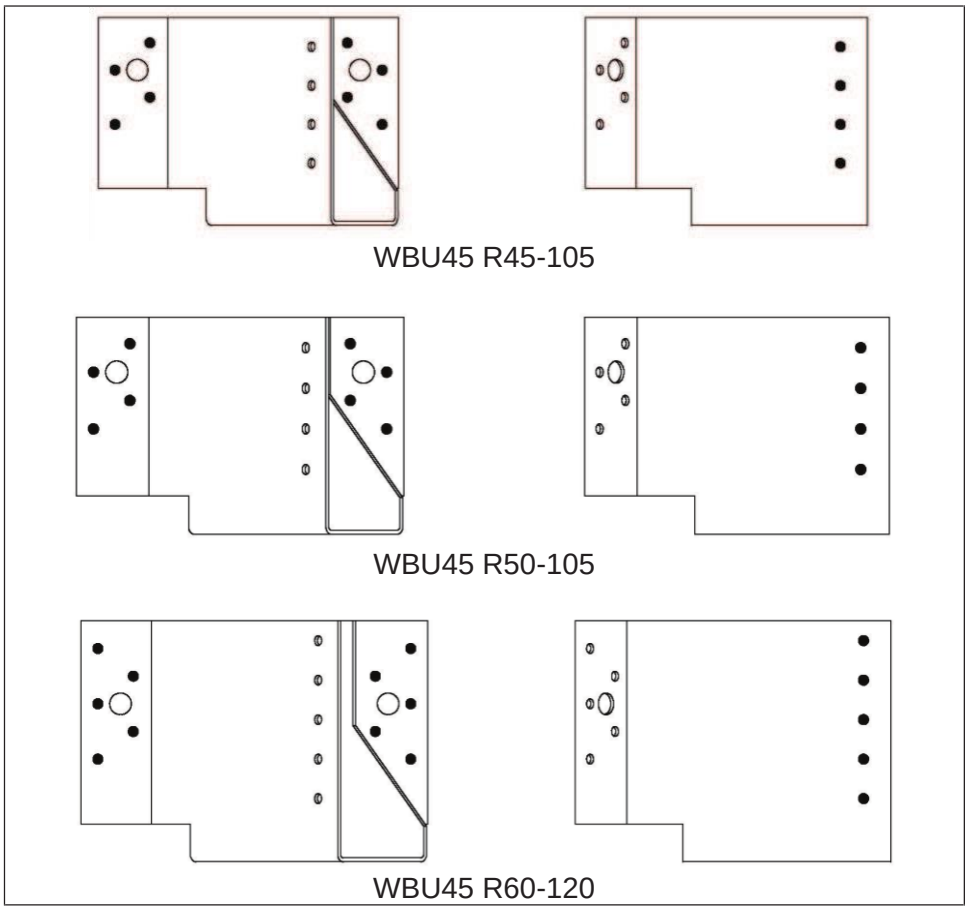


92 pav. Tipas WBU

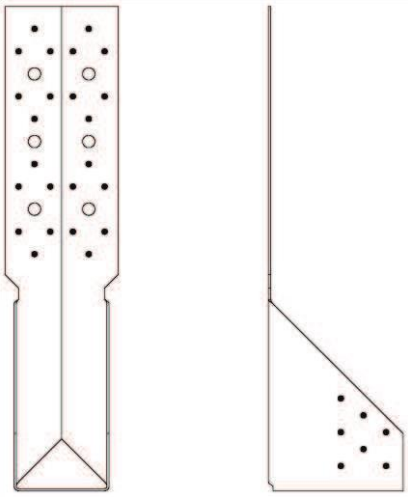


WBC 80

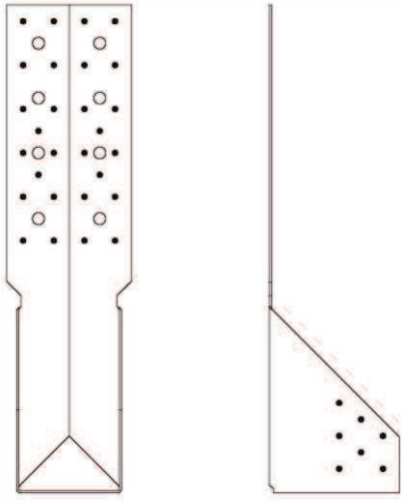


WBC 92

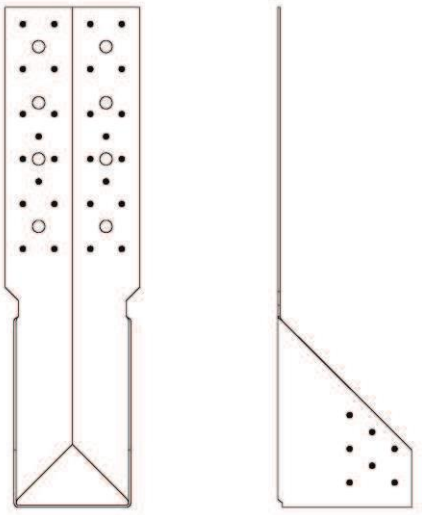

WBC 100

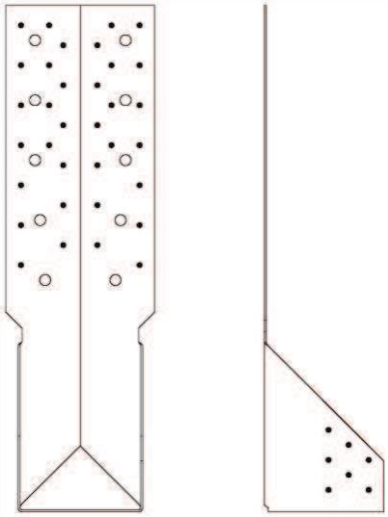


WBC 120

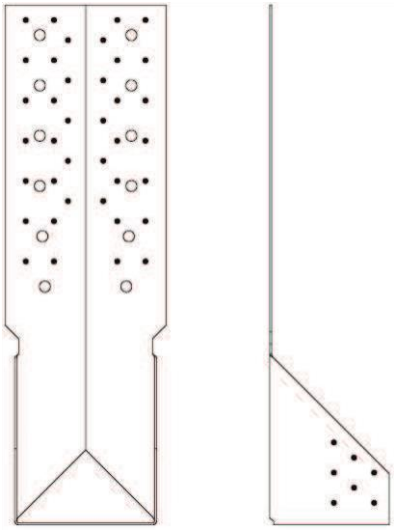


WBC 137


93 pav. Tipas WBC

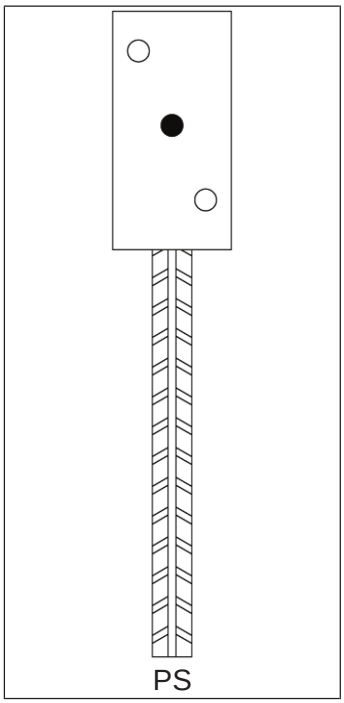


94 pav. Tipas PS

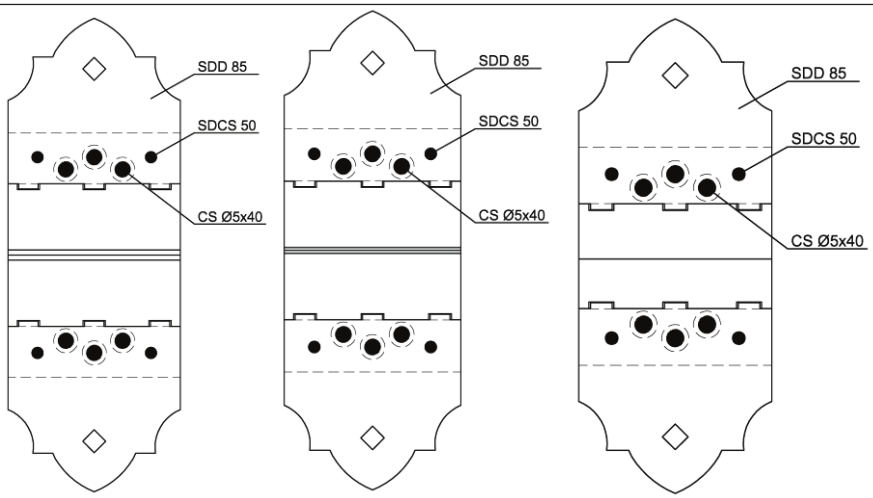


SDKL 1 SDKLR 1 SDLZ 1

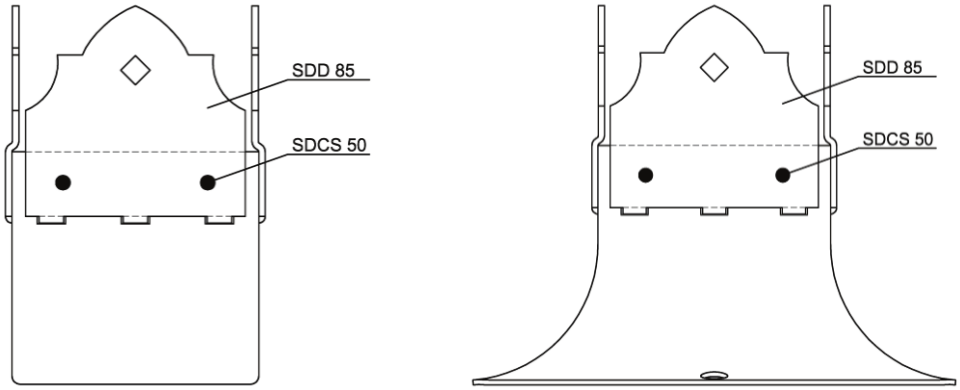


SDP 90 A SDP 90 B

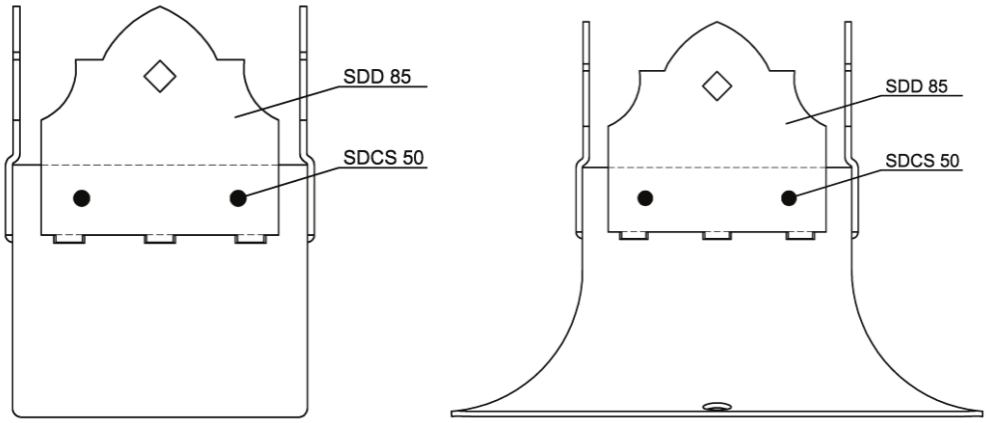


SDP 100 A SDP 100 B

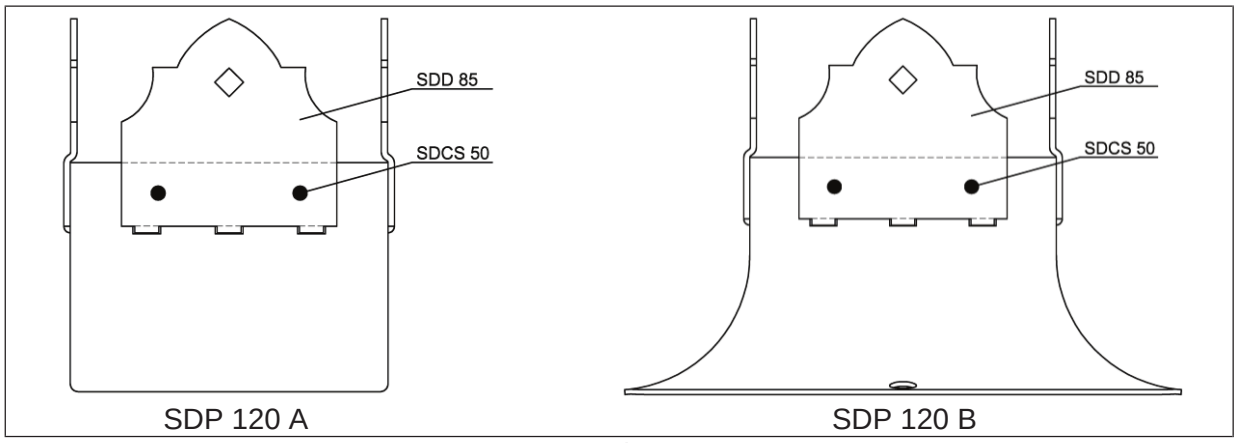


95 pav. Tipas SD

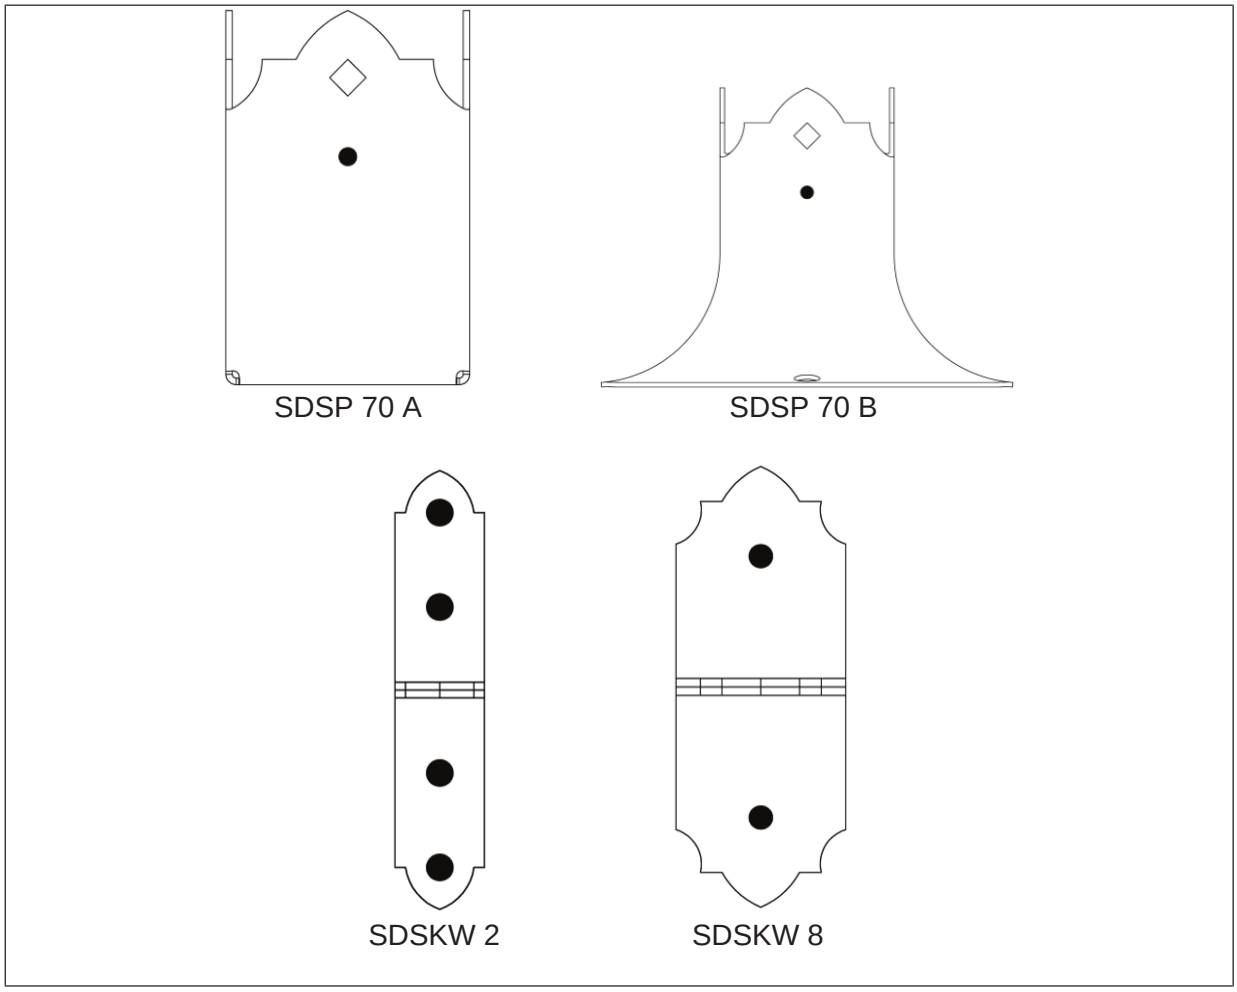


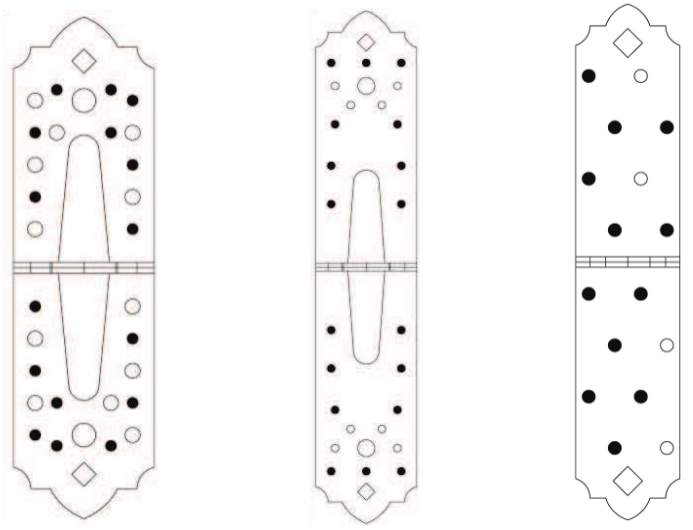


SDSKP 1 SDSKP 5 SDSKM 7

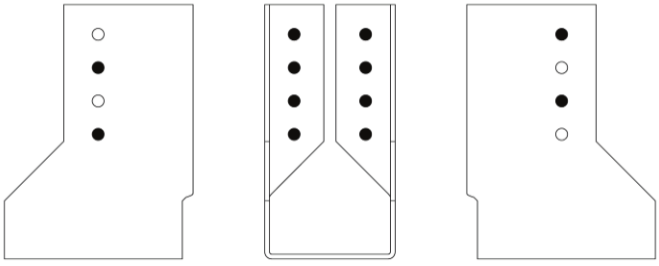


SDSWBZ 10

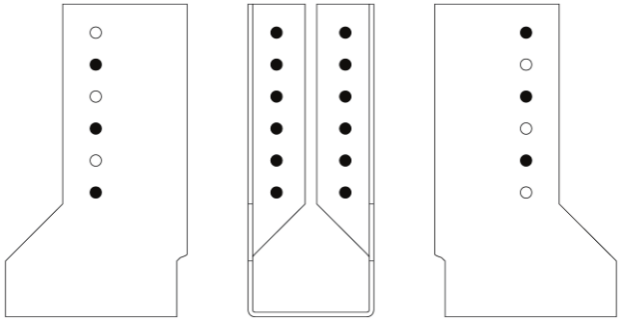


SDSWBZ 11

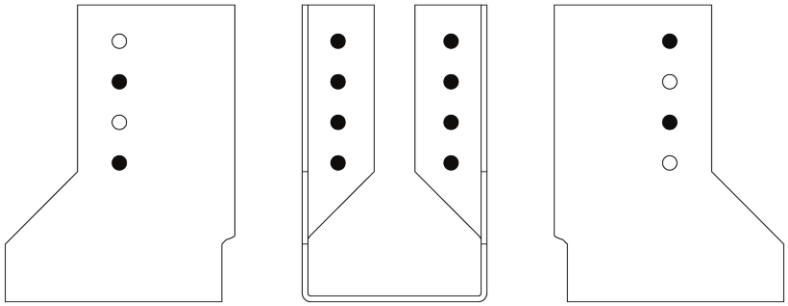


SDSWBZ 14

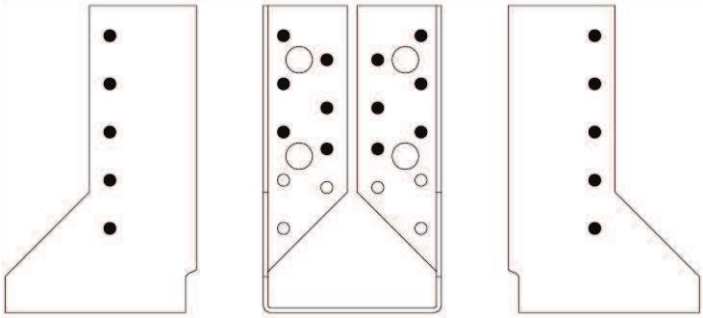

SDSWBZ 21

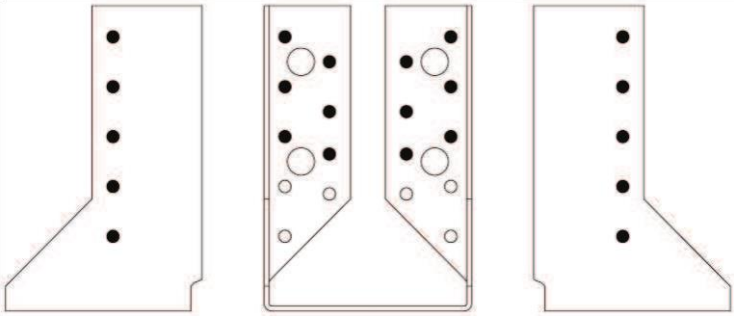

SDSWBZ 26

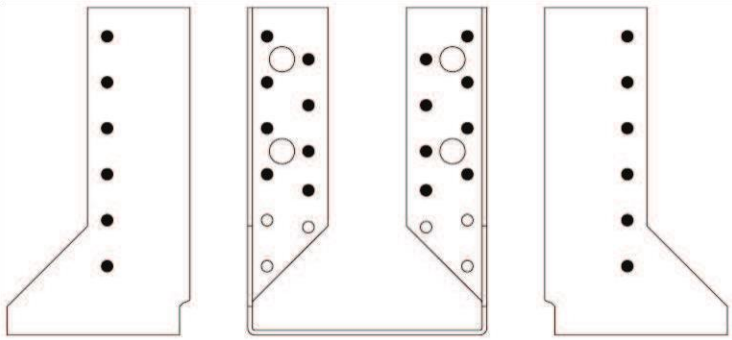

SDSWBZ 30

96 pav. Tipas SDS

5 PRIEDAS

JUNGIAMŲJŲ ELEMENTŲ SPECIFIKACIJA

42 lentelė

Detalė	Kaiščių tipo jungtys	Jungtys / detalė [vnt.]	Jungtys / jungtis [vnt.]
KLR 1	TVIRTINIMAS ø 4x50	6	6
KLR 2	TVIRTINIMAS ø 4x50	13	13
KLR 3	TVIRTINIMAS ø 4x50	13	13
KLR 4	TVIRTINIMAS ø 4x50	12	12
KLR 5	TVIRTINIMAS ø 4x50	30	30
KLR 6	TVIRTINIMAS ø 4x50	29	29
KP 7	TVIRTINIMAS ø 4x50 / DIN 571 ø12x100	28 / 4	56 / 8
KP 8	TVIRTINIMAS ø 4x50 / DIN 571 ø 12x100	17 / 2	34 / 4
KPK 4	TVIRTINIMAS ø 4x50	22	22
KPK 11	TVIRTINIMAS ø 4x50	11	11
KPK 12	TVIRTINIMAS ø 4x50	17	17
KPK 13	TVIRTINIMAS ø 4x50	25	25
KPK 21	TVIRTINIMAS ø 4x50	14	14
KPK 22	TVIRTINIMAS ø 4x50	14	14
KPK 23	TVIRTINIMAS ø 4x50	14	14
KPK 31	TVIRTINIMAS ø 4x50	9	18
KPK 32	TVIRTINIMAS ø 4x50	9	18
KPK 33	TVIRTINIMAS ø 4x50	9	18
KPL 5	TVIRTINIMAS ø 4x50	8	8
KPL 6	TVIRTINIMAS ø 4x50	12	12
KPL 11	TVIRTINIMAS ø 4x50	13	13
KPL 21	TVIRTINIMAS ø 4x50	28	28
KR 1	TVIRTINIMAS ø 4x50	3	3
KR 2	TVIRTINIMAS ø 4x50	12	12
KP 3	TVIRTINIMAS ø 4x50	3	3
KRD 5	TVIRTINIMAS ø 4x50	7	7
KRD 6	TVIRTINIMAS ø 4x50	7	7
SDLZ 1	SDCS 50 / CS ø 5x40	4 / 6	4 / 6
SDKLR 1	SDCS 50 / CS ø 5x40	4 / 6	4 / 6
SDKL 1	SDCS 50 / CS ø 5x40	4 / 6	4 / 6
SDSP 70 A	SDCS 50	4	4
SDSP 70 B	SDCS 50	4	4
SDP 90 A	SDCS 50	8	8
SDP 90 B	SDCS 50	8	8
SDP 100 A	SDCS 50	8	8
SDP 100 B	SDCS 50	8	8
SDP 120 A	SDCS 50	8	8
SDP 120 B	SDCS 50	8	8

Detalė	Kaiščių tipo jungtys	Jungtys / detalės [vnt.]	Jungtys / jungtis [vnt.]
SDSKW 2	TVIRTINIMAS ø 4x50	4	8
SDSKW 8	SDCS 50	2	4
SDSKP 1	TVIRTINIMAS ø 4x50	16	32
SDSKP 5	TVIRTINIMAS ø 4x50	18	36
SDSKM 7	TVIRTINIMAS ø 4x50	12	24
SDSWBZ 10	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	8 / 4	8 / 4
SDSWBZ 11	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	12 / 6	12 / 6
SDSWBZ 14	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	8 / 4	8 / 4
SDSWBZ 21	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	12 / 10	12 / 10
SDSWBZ 26	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	12 / 10	12 / 10
SDSWBZ 30	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	16 / 12	16 / 12
PS 60	ISO 4014 M10x80-5.8	1	1
PS 70	ISO 4014 M10x90-5.8	1	1
PS 80	ISO 4014 M10x100-5.8	1	1
PS 90	ISO 4014 M10x110-5.8	1	1
PS 100	ISO 4014 M10x120-5.8	1	1
PS 120	ISO 4014 M10x140-5.8	1	1
PS 140	ISO 4014 M10x160-5.8	1	1
LU25 R80 (L80)	TVIRTINIMAS ø 4x50	16	16
LU25 R120 (L120)	TVIRTINIMAS ø 4x50	24	24
WBC 80	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	24 / 14	24 / 14
WBC 92	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	28 / 14	28 / 14
WBC 100	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	28 / 14	28 / 14
WBC 120	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	34 / 14	34 / 14
WBC 137	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	38 / 14	38 / 14
WBU45 R45-105 (L45-105)	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	8 / 4	8 / 4
WBU45 R50-105 (L50-105)	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	8 / 4	8 / 4
WBU45 R60-120 (L60-120)	TVIRTINIMAS ø 4x50 / TVIRTINIMAS ø 4x40	10 / 5	10 / 5
KKB 1	TVIRTINIMAS ø 4x50 / ISO 4014 M16x160-5.8	24 / 1	48 / 2
LB 1	ISO 4014 M12x120-5.8 / ISO 4014 M12x90-5.8	1 / 1	1 / 2
LB 2	ISO 4014 M12x120-5.8 / ISO 4014 M12x90-5.8	1 / 1	1 / 2
LB 4	ISO 4014 M12x120-5.8 / ISO 4014 M12x90-5.8	1 / 1	1 / 2
NT 25	ISO 4017 M5x16-8.8	6	6
NT 40	ISO 4017 M5x16-8.8	10	10
NT 60	ISO 4017 M5x16-8.8	14	14
KPS 1	TVIRTINIMAS ø 4x50	16	32
KPS 2	TVIRTINIMAS ø 4x50	36	72
KPS 3	TVIRTINIMAS ø 4x50	20	40

Detalė	Kaiščių tipo jungtys	Jungtys / detalės [vnt.]	Jungtys / jungtis [vnt.]
KPS 4	TVIRTINIMAS ø 4x50	20	40

6 PRIEDAS

INFORMACINIAI DOKUMENTAI

[1] Trimačių įkalamų plokštelių Europos techninio patvirtinimo gairės ETAG 015 (2012 m. lapkričio mėn. redakcija)

[2] Deklaracija apie pavojingas medžiagas, išduota „DOMAX sp. z o.o.“

[3] EN 26891:1991 Medinės konstrukcijos. Jungtys, padarytos naudojant mechaninius tvirtinimo elementus. Bendrieji stiprumo ir deformacijos savybių nustatymo principai

[4] EN ISO 8970:2010 Medinės konstrukcijos. Jungčių, padarytų naudojant mechaninius tvirtinimo elementus, bandymas. Medienos tankio reikalavimai

[5] EN 384+A1:2019 Konstrukcinė mediena. Būdingų mechaninių savybių ir tankio verčių nustatymas

[6] EN 13183-2:2002 Pjautinės medienos ruošinio drėgmės kiekis. 2 dalis. Įvertinimas elektrinės varžos metodu

[7] EN 1309-1:1997 Apvalioji ir pjautinė mediena. Matmenų matavimo metodas. 1 dalis. Pjautinė mediena

[8] EN 14358:2006 Medinės konstrukcijos. Būdingųjų verčių apskaičiavimas ir patikrinimas

[9] EOTA TR 016 *„Trimačių įkalamų plokštelių bandymo metodas su pavyzdžiais“*, 2002 m. vasario mėn. redakcija

4 Taikyta eksploatacinių savybių pastovumo vertinimo ir patikrinimo (toliau - ESPVP) sistema su nuoroda į jos teisinį pagrindą.

Remiantis Europos Komisijos sprendimu 1997/638/EB[1], eksploatacinių savybių pastovumo įvertinimo ir patikrinimo sistema (-os) (žr. Reglamento (ES) Nr. 305/2011 V priedą ir Komisijos deleguotąjį reglamentą (ES) Nr. 2014) pateikta šioje lentelėje, taikoma:

Produktas (-ai)	Numatyta (-os) paskirtis (-ys)	Lygis (-iai) arba klasė (-ės)	Atitikties sistemos(-ų) atestavimas
Šlyties plokštės, dantytų plokščių jungtys, perforuotos vinių plokštelės, įkalamos plokštelės	Konstrukciniams medienos gaminiams		2+

5 Techniniai duomenys, reikalingi ESPVP sistemai įdiegti, kaip numatyta galiojančiame EAD

Išduota Prahoje, 2020-04-28

/*Parašas*/
Išdavė
Mária Schaan
TAB vadovė

Priedai:

1 priedas Produkto informacija ir aprašymai
2 priedas Apkrovos pagal statines diagramas
3 priedas Būdingos jungčių apkrovos
4 priedas Vinių kalimo tvarkos
5 priedas Jungiamų elementų specifikacija
6 priedas Pagrindžiantys dokumentai

[1] 1997-09-19 Europos Bendrijos oficialusis leidinys L 268/36

2024 m. gegužės 10 d.

Aš, ***Jurgita Naujokaitė***, MB PROGRESO vertimų biuro vadovė ir vertėja, prisiimu atsakomybę už dokumento vertimo iš anglų kalbos į lietuvių kalbą teisingumą.

Man žinoma apie atsakomybę pagal LR BK 235 str. už melagingą ar žinomai neteisingą vertimą.

Vertėjos parašas

