KLIMAS Sp. z o.o. ul. W. Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów
tel. +48 34 377 71 00, fax. +48 34 328 01 73 Hotline: 801 477 477, www.wkret-met.com.pl

PRODUCT DATA SHEET – WK-FT

Section 1. PRODUCT DESCRIPTION


PLASTIC CUTTER FOR CUTTING HOLES IN POLYSTYRENE – WK-FT

Plastic cutter WK-FT for cutting holes in polystyrene insulation material for insertion of polystyrene disc KS/KSG in immersed mount of fasteners. The cutter has a flange collar to ensure a controlled cutting depth of 2cm. Installation of fasteners using cutter WK-FT and polystyrene discs (KS/KSG) minimizes spot thermal conductivity of fasteners and makes preparation of surface for final finishing of the façade much easier and faster.



Section 2. EXAMPLE INSTALLATION

- Example of immersed mount of fastener WKTHERM S-8 using cutter WK-FT and polystyrene disc KS/KSG

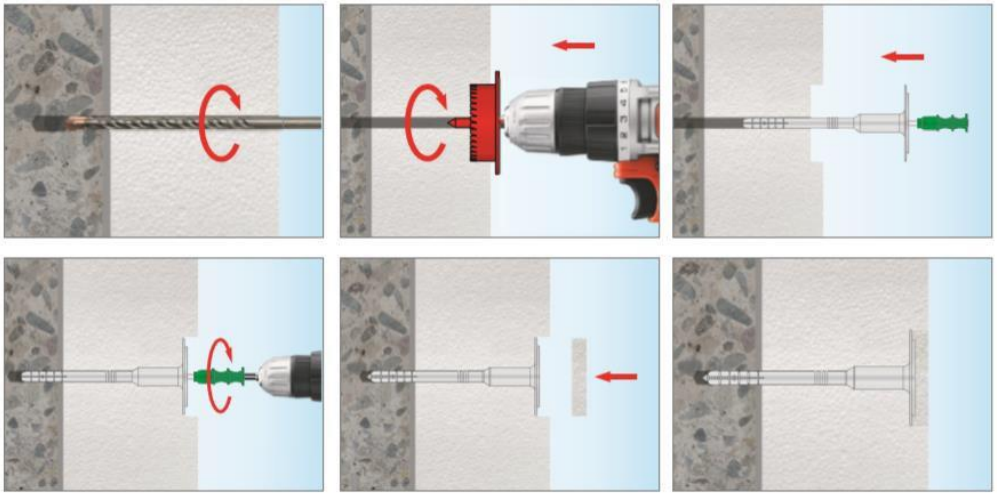

Section 3. TECHNICAL DATA

TECHNICAL PARAMETERS			
Product code	Diameter	Maximum cutting depth [mm]	Number of pieces in a
WK-FT	66.7	20	1

Section 4. REMARKS

1. All previous versions of this Product Data Sheet shall cease to be valid
2. Data given in this Product Data Sheet is in accordance with current knowledge and published in good faith. KLIMAS Sp. z o.o. is not responsible for correctness and quality of the fixing if recommendations regarding method of use and installation are not followed.

All rights reserved The sheet may be disclosed only in the form as delivered. No part (contents such as text, graphics, logos, figures, pictures, and any other data) given in this document must be modified or published whatsoever in part, without prior authorisation. Any trademarks, graphic symbols, trade names, logos and other data are protected by copyright and are property of their owner. Created: 2013-10-16
Updated: 2018-04-10