
Rooftop holder for rooftop constructions, TSP®

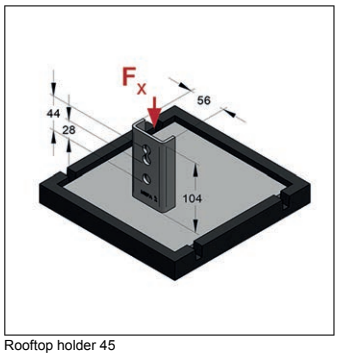

Rooftop holder 45

Specification

Application area:	For the elevation of supporting structures on flat roofs.
Installation advise:	The use of roof brackets on gravel or extensive greening is not recommended.
Scope of delivery:	1x rubber pad, 1x holder, 2x hexagon screws M12 x 25, 1x 2-hole tooth plate
Recommended accessories:	Separation fleece: recommended for use on PVC membrane roof surfaces to prevent migration of plasticizer.
Profile type:	45/26 - 45/120

Technical data

Material:	Steel
Surface:	hot-dip galvanized

Remark: The permissible floor load must be checked on site. Wind and snow loads must be considered separately.

Model	Dimension steel plate [mm]	Dimension rubber pad [mm]	Load F_X [kN]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
45	200x200x6	225x225x17	4	3,71	2	08197500