
OPTIMUM XLV profile, TSP®

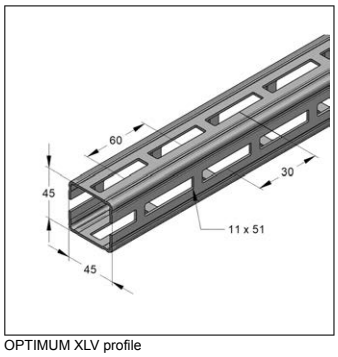

OPTIMUM XLV profile

Product description

- Torsionally rigid and practical
- Connection in any position and situation thanks to 4-sided connectivity
- Stepless installation possible
- C4 high-coated, ideally suited for indoor and outdoor use
- CE-compliant profile

Specification

Application area: Profile for the medium load range.

Specification: closed profile

Technical data

Material: Steel

Remark: Suitable protecting caps see chapter 2c. For technical overview of mounting rails see end of chapter 2d. A design in accordance with DIN EN 1993-1-2 (EC) for applications in the event of fire is carried out by our application technology department. A design in accordance with FM is carried out by our application technology department.

Dimension [mm]	Length [m]	TSP	Surface	Weight [kg/m]	Bundle [m]	Packing unit [m]	Part-No.
45/45/2	3	yes	Zinc-Magnesium	2,08	180	18	08244001
45/45/2	6	yes	Zinc-Magnesium	2,08	360	24	08244002