

OPTIMUM XLV adapter, TSP®

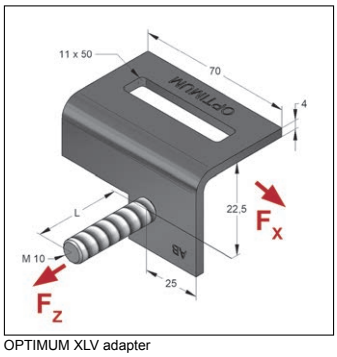

OPTIMUM XLV adapter


Assembly example

Specification

Application area:	For adapting components such as base plates, Z-guides for sliding plates, ceiling hangers, sliding parts with lugs, roller bearings, etc.
Recommended accessories:	OPTI-Lock M10x15
Installation advise:	The adapter must be used in pairs. The distance between them can be freely selected depending on the component part.

Technical data

Material:	Steel
Surface:	Zinc-Nickel
Tightening torque bolt:	10 Nm

Thread	Length thread L [mm]	Load F_X [kN]	Load F_Z [kN]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
M10	20	6	9	0,159	10	08245008
M10	40	6	9	0,171	10	08245010