
Zykon-hammerset anchor FZEA II and FZEA II A4



Zykon hammerset anchor FZEA II



Zykon hammerset anchor FZEA II



Zykon hammerset anchor FZEA II V4A

ETA-06/0271 | FM APPROVED ab M10 | M 8 - M 20 | R 120

Product description

- ZYKON Drop-in anchor FZEA II is an female threaded anchor with M8, M10 or M12
- Quick impact assembly
- Maximum safety thanks to form-fit connection
- High flexibility thanks to the use of commercially available metric screws and threaded rods
- Undercut bore without tool change. This saves time and costs
- ETA approval for cracked concrete and fire resistance class R 120
- For individual fastening of pipes, suspended ceilings and sprinkler systems

Specification

Application area: For cracked and non-cracked concrete C20/25 up to C50/60.

Installation advise: Correct installation is ensured when the anchor sleeve is driven flush with the surface of the concrete and the control mark on the dowel is visible. Therefore assembly defects can be avoided.


Specification: Undercut anchor with female thread pre-positioned installation

Remark: Load values see end of chapter 7.

Delivery time: V4A - 3 working days, ex works

Series	Dimension [mm]	Material	Drill Ø [mm]	Depth of anchoring [mm]	min. embedment depth [mm]	max. embedment depth [mm]	Thread	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
FZEA	10x40	Steel, galv.	10	40	11	17	M8	0,0153	100	21721040
FZEA	12x40	Steel, galv.	12	40	13	19	M10	0,0206	100	21721240
FZEA	14x40	Steel, galv.	14	40	15	21	M12	0,0278	50	21721440
FZEA	10x40	Stainless steel, V4A	10	40	11	17	M8	0,0150	100	2176042
FZEA	12x40	Stainless steel, V4A	12	40	13	19	M10	0,0206	100	2176242
FZEA	14x40	Stainless steel, V4A	14	40	15	21	M12	0,0278	50	2176442

Installation advise Zykon hammerset anchor FZEA II

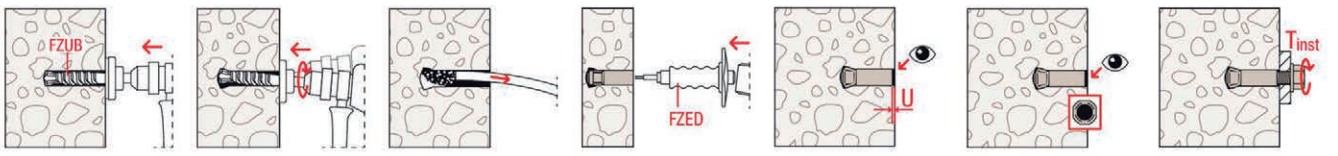

©Fischer