


Profile rail lining KG

27 35 35 45 EPDM / TPE




C-profile lining 27/18



Connection for threaded rods



Stex rail rubber 35

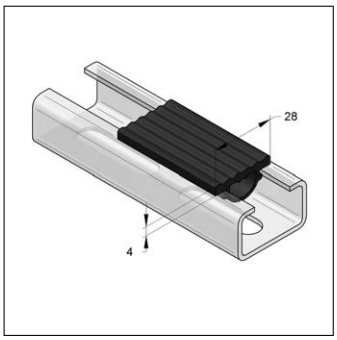

C-profile lining 35

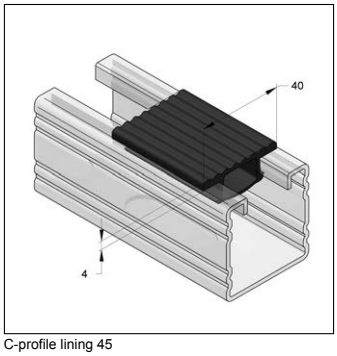

C-profile lining 45

SCHALL-SCHUTZ DIN 4109

Baustoffklasse B2 "normal entflammbar" nach DIN 4102

Specification

Application area: Lining between profile rail and part to be supported (e.g. ventilation ducts).

Technical data

Material type:	TPE
Material colour:	black
Temperature resistance:	-35 °C up to 100 °C

Profile type	Length [m]	Width [mm]	Insulation thickness [mm]	Connection	Weight [kg/m]	Packing unit [m]	Part-No.
27/18	20	26	6	M8	0,0990	20	710001901
Stex 35	20	35	5	M8	0,328	20	1272019
35	20	35	6	M8	0,165	20	710003502
45	10	40	4	M10	0,224	10	710004502