


CENTUM® T-lock


80 100 120 200

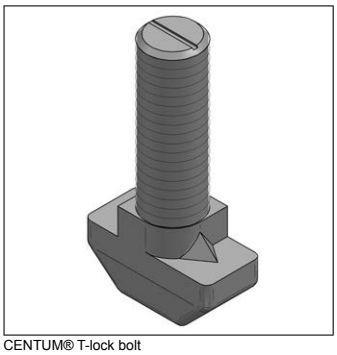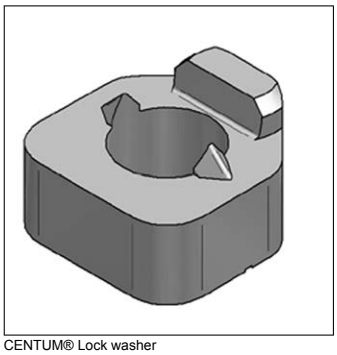

T-lock


CENTUM® T-lock bolt


CENTUM® Lock washer



Hexagon nut

TSP®

Specification

Application area: For form-locking mounting with MEFA CENTUM® square profile.

Profile type: XL 80, XL 100, XL 120, XL 200

Technical data

Material: Steel

Surface: Zinc-Nickel

Remark: Assembly instructions see Chapter 15.

Description	Thread	Length thread [mm]	Strength class	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
T-lock	M12	40	10.9	0,120	50	1610011000
T-lock bolt	M12	40	10.9	0,0640	50	1610012100/zn
Lock washer			10	0,0310	100	1610019000/zn
Hexagon nut	M12		10	0,0165	100	8989995/zn

Loads and tightening torques CENTUM® T-lock

Profile	F_X [kN]	F_Y [kN]	F_Z [kN]	tightening torque [Nm]
XL 80	16,0	19,5	3,0	90
XL 100	16,0	19,5	3,0	120
XL 120	16,0	19,5	4,0	120
XL 120s	16,0	19,5	6,0	120
XL 200	16,0	19,5	6,0	120
XL 200 horizontal	16,0	19,5	4,0	120