

CENTUM® Connector

80 100 120 200



screw plant top/down

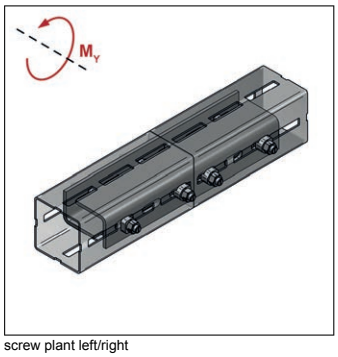

screw plant left/right

TSP® CE

Specification

Application area:	Component for connecting two identical CENTUM® square profiles.
Scope of delivery:	2 x u-steel, 8x CENTUM® T-lock M12x40
Installation advise:	The profile connector cannot be aligned exactly in the middle.
Profile type:	XL 80, XL 100, XL 120 and XL 200

Technical data

Material:	Steel
Surface:	hot-dip galvanized
Surface screw:	Zinc-Nickel

Limited torque M_Y XL80 at screw position top/bottom [kNm]	Limited torque M_Y XL80 at screw position left/right [kNm]	Limited torque M_Y XL100 at screw position top/bottom [kNm]	Limited torque M_Y XL100 at screw position left/right [kNm]	Length [mm]	Width [mm]	Height [mm]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
1,25	0,85	2,5	1,35	380	67	59	5,28	1	1640005011