

CENTUM® Holder


80 100 120 200

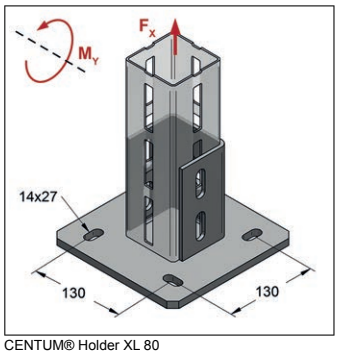


CENTUM® Holder XL 80

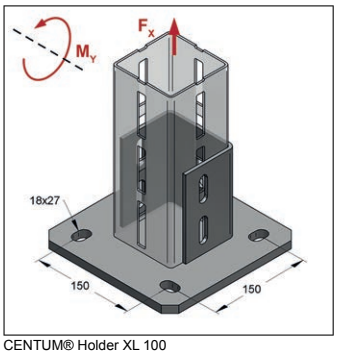

CENTUM® Holder XL 100



CENTUM® Holder XL 120

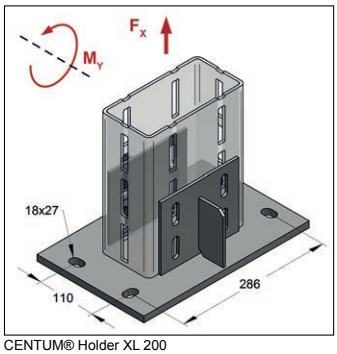

CENTUM® Holder XL 200

TSP® CE

Specification


Application area:	Profile holder for fastening the CENTUM® square profile directly to the building structure.
Recommended accessories:	CENTUM® T-lock plus M12x40

Technical data

Material:	Steel
Surface:	hot-dip galvanized

Remark: The load specifications apply for at least one screw connection per profile side / for XL 200 two screw connections per profile side. The limit torques apply from at least 5 screw connections / for XL 200 from at least 4 screw connections.

Profile type	Load F_X [kN]	Limited torque M_Y [kNm]	Width plate [mm]	Length plate [mm]	Plate thickness [mm]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
XL 80	48	4,2	200	200	10	4,48	1	1620801000
XL 100	48	5,2	220	220	12	6,15	1	1621001000
XL 120	48	5,2	220	240	12	6,71	1	1621201000
XL 200	64	5,2	220	340	12	9,57	1	1622001000



$M_G = F2*L$