

CENTUM® Angles horizontal - cross connector


80 100 120 200

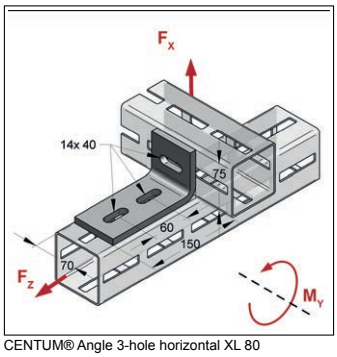

CENTUM® Angle 3-hole horizontal XL 80

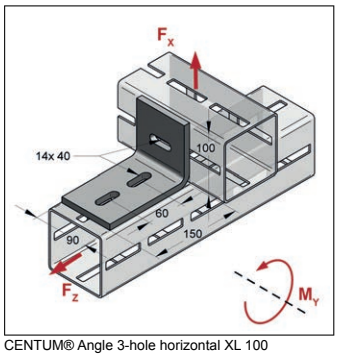

CENTUM® Angle 3-hole horizontal XL 100

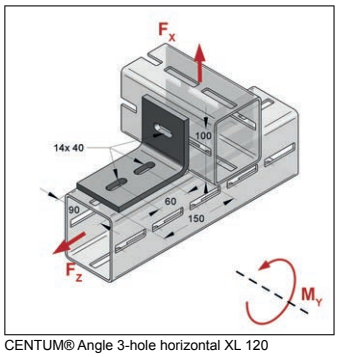

CENTUM® Angle 3-hole horizontal XL 120

Specification

Application area: Angle components for connecting CENTUM® square profile.

Recommended accessories: CENTUM® T-lock plus M12x40

Technical data

Material: Steel

Surface: hot-dip galvanized

Remark: Always align elongated holes of components in direction of elongated holes of CENTUM® profile.

Series	Profile type	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
3-hole	XL 80	1,13	1	1640081012
3-hole	XL 100, XL 200	1,68	1	1640001012
3-hole	XL 120	1,68	1	1641201012

CENTUM® Anlge horizontal - loads and torques

Profile	Load F_X	Load F_Z	limitation torque M_Y
XL 80	6,0 kN	32 kN	0,4 kNm
XL 100	6,0 kN	32 kN	0,5 kNm
XL 120	6,0 kN	32 kN	0,5 kNm
XL 120s	12,0 kN	32 kN	0,5 kNm
XL 200	12,0 kN	32 kN	0,5 kNm

Limitation torque applies when all screw holes are used.