


CENTUM® Z-guide

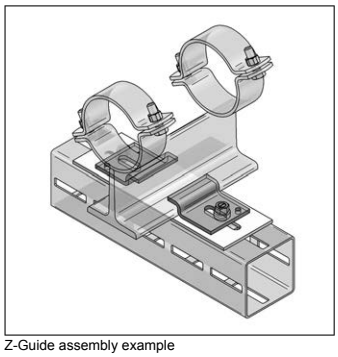


Z-Guide assembly example


Installation recommendation

Specification

Application area:	For guiding of sliding sledges and sliding supports. Use in pairs.
Scope of delivery:	2x CENTUM® Z-Guides
Recommended accessories:	Sliding stripe PA 6, CENTUM® T-bolt, with steel disk M12x40
Installation advise:	Suitable for upright mounting only.
Profile type:	XL 80, XL 100, XL 120, XL 200

Technical data

Material:	Steel
Surface:	hot-dip galvanized

Remark: Delivered in pairs

max. plate thickness [mm]	Length [mm]	Width [mm]	Thickness [mm]	Elongated hole [mm]	Weight [kg/set]	Packing unit [set]	Part-No.
17,5	68,5	80	6	14x40	0,800	1	1650015017