

CENTUM® Sliding base, standing

80 100 120 200

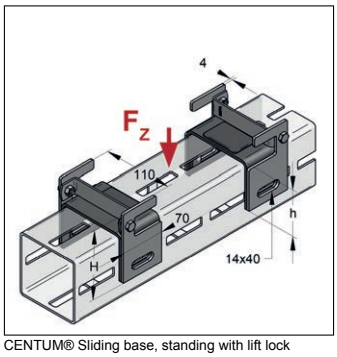

CENTUM® Sliding base, standing with lift lock

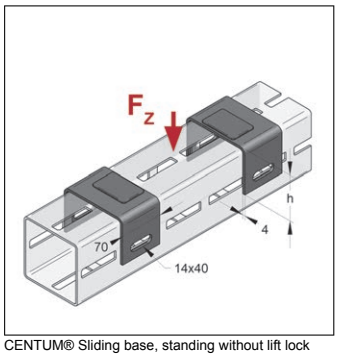

CENTUM® Sliding base, standing without lift lock

TSP®

Specification

Application area:	Standing sliding base to support sliding sledges or supports on CENTUM® mounting profile. Always used in pairs.
Scope of delivery:	Set includes 2x Slinding base, standing
Recommended accessories:	CENTUM® T-lock plus M12x40 or T-bolt with steel disk, M12/40

Technical data

Material:	Steel
Surface:	hot-dip galvanized
Material sliding stripe:	PA 6
max. thickness sliding plate:	16 mm
Static friction factor:	0,2
Temperature resistance:	-200 up to 80 °C

Remark: Delivered in pairs. Loads refer to pair.

Profile type	Lift lock	Alignment	Load F_Z [kN]	Height H [mm]	Height sliding base h [mm]	Weight [kg/set]	Packing unit [set]	Part-No.
XL 80	with lift lock	standing	32	100	64	1,81	1	1650801020
XL 100, XL 200	with lift lock	standing	40	110	74	2,13	1	1651001020
XL 120	with lift lock	standing	40	120	84	2,23	1	1651201050
XL 100, XL 200	without lift lock	standing	40		74	1,07	1	1651001010
XL 120	without lift lock	standing	40		84	1,28	1	1651201030