


CENTUM® Clamping bow

80 100 120

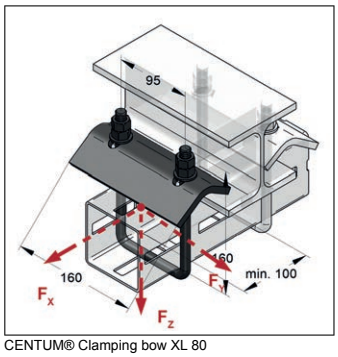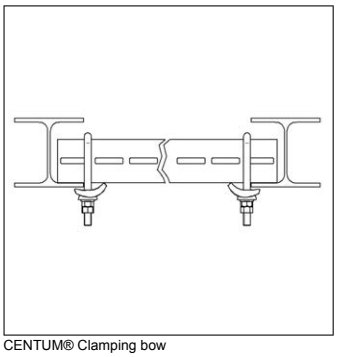

CENTUM® Clamping bow XL 80


CENTUM® Clamping bow

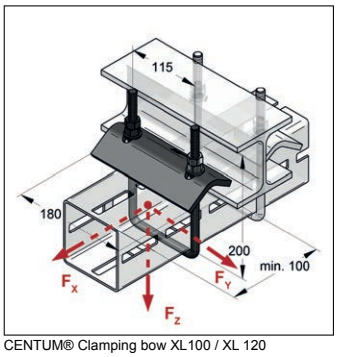

CENTUM® Clamping bow XL100 / XL 120

TSP®

Specification

Application area:	For fastening CENTUM® profiles on steel girder.
Scope of delivery:	1x U-bolt, 1x CENTUM® tensioning bracket, 4x Nuts M12, 2x washer
Installation advise:	Use in pairs. Suitable for horizontal use only. The tightening torque must be observed.

Technical data

Material:	Steel
Surface:	hot-dip galvanized
Surface u-bolt:	Zinc-Nickel

Remark: The loads of CENTUM® Square profile must be observed.

Profile type	Thread	Load F_X [kN]	Load F_Y [kN]	Load F_Z [kN]	Tightening torque [Nm]	Clamping thickness [mm]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
XL 80	M12	3	3	10	25	6-25	1,30	1	1660801011

CENTUM® Clamping bow

Profile type	Thread	Load F_X [kN]	Load F_Y [kN]	Load F_Z [kN]	Tightening torque [Nm]	Clamping thickness [mm]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
XL 100, XL 120	M12	3	3	10	25	6-25	1,49	1	1661001011