


CENTUM® Clamping claw - type LR

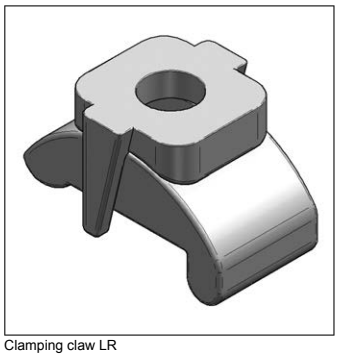

Clamping claw LR

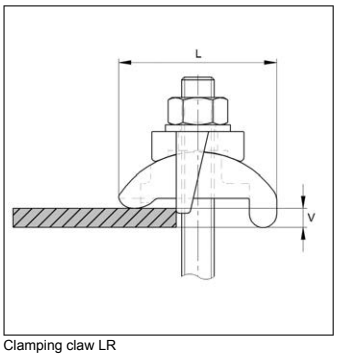

Clamping claw LR

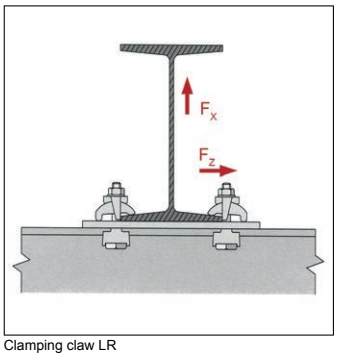

Clamping claw LR

Specification

Application area:	For clamping CENTUM® adapter plates to steel beams.
Recommended accessories:	hexagon bolt / threaded rod h.-d. galv. FK 8.8, washers DIN 125 h.-d. galv., hexagon nuts h.-d. galv.

Technical data

Material:	Spherulitic cast iron
Surface:	hot-dip galvanized
Safety factor:	5:1

Delivery time: on demand

Remark: Load specifications only apply in conjunction with attachments of strength class 8.8. For F_Z, the value applies to two bolted connections. Larger flange thicknesses can be clamped with washer components (P1 and P2 on request).

* tested for dynamic loads

Model	Length L [mm]	Clamping thickness V [mm]	Width [mm]	Requested screw	Strength class	Tightening torque [Nm]	Load F_X [kN]	Load F_Z [kN]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
LR	56	3-12	39	M12	8.8	69	4,5	0,9	0,180	1	1660003012/fvz
LR	67	3-16	46	M16	8.8	147	8,5	1,7	0,324	1	1660003016/fvz *