
Stex 45 threaded bolt GB

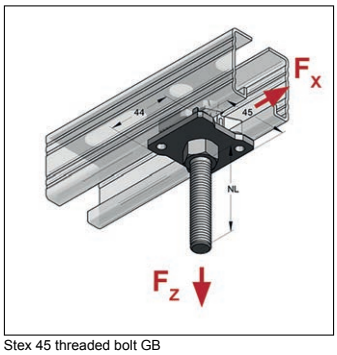

Stex 45 threaded bolt GB

Product description

Optionally with threaded pin M8, M10 or M12.

Your advantages:

- Instead of a toothed plate, threaded pin, and lock plate, now just the one-piece Stex 45 threaded bolt.
- Insert the GB threaded bolt into the mounting rail, rotate it 90°, place the lock nut on it, and screw on the pipe clamp.
- A form-fit connection in the mounting rail is achieved through the toothed plate.
- Continuously adjust length or height differences up to 30 mm without sawing or tools.
- With different bolt lengths, distances of up to 130 mm can be achieved.

Specification

Application area:	Quick-fixing system for direct pipe clamp attachment to Stex profile rails with permanently integrated threaded bolt and nut.
Type of attachment :	form-locking connection
Profile type:	45

Technical data

Material:	Steel
Surface:	galvanized

Remark: For load specifications see end of chapter 2c.

Thread	Length thread [mm]	Usable length NL [mm]	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
M8	50	11	0,134	40	1281050
M8	70	31	0,141	20	1281070
M8	90	51	0,147	20	1281090
M8	110	71	0,154	20	1281110
M8	130	91	0,160	20	1281130
M10	50	10	0,147	40	1282050
M10	70	30	0,157	20	1282070
M10	90	50	0,166	20	1282090
M10	110	70	0,178	20	1282110
M10	130	90	0,188	20	1282130
M12	50	7	0,159	40	1283050
M12	70	27	0,174	20	1283070
M12	90	47	0,189	20	1283090
M12	110	67	0,203	20	1283110
M12	130	87	0,218	20	1283130