KLIMAS Sp. z o.o. ul. W. Witosa 135/137
Kuźnica Kiedrzyńska 42-233 Mykanów
tel. +48 34 377 71 00, fax. +48 34 328 01 73 Infolinia: 801 477 477, www.wkret-met.com.pl

PRODUCT DATA SHEET – KPU

Section 1. PRODUCT DESCRIPTION

UNIVERSAL PLUG PLASTIC SLEEVE – KPU






Universal plug plastic sleeve KPU is made of polyamide. It is used for fixing of members on most of building substrates. It has stabilising fins which keep the sleeve in place when screwing in the screw. The sleeve adjusts to substrate type: in solid materials, installation is executed by expansion of the sleeve, and in materials with voids or plasterboard by shape fixation.

Types of substrates on which plastic sleeve KPU can be installed:

- **Concrete**
- **Solid clay brick and sand-lime brick**
- **Hollow clay brick and sand-lime brick**
- **Plasterboard**


Section 2. METHOD OF INSTALLATION

1. Original sleeves delivered by the manufacturer can be used only
2. Before fastening identify the substrate on which sleeve will be installed
3. Select adequate length of the sleeve so that expansion zone is in the construction material of the wall
4. Use proper method of drilling according to a substrate type (holes in masonry substrate made of hollow blocks should be drilled using a drill without impact)
5. Diameter of drilled holes should match diameter of the sleeves used
6. Drilled holes in substrates of solid materials should be deeper by min. 10mm compared to the sleeve anchorage depth
7. Clean the holes in solid materials of drillings with a back and forth motion of the drill at a reduced speed
8. Then insert the sleeve into a drilled hole, and drive the matched screw through the element being fixed until it completely penetrates the sleeve (pre-fastening installation)
9. The sleeve is not a structural element

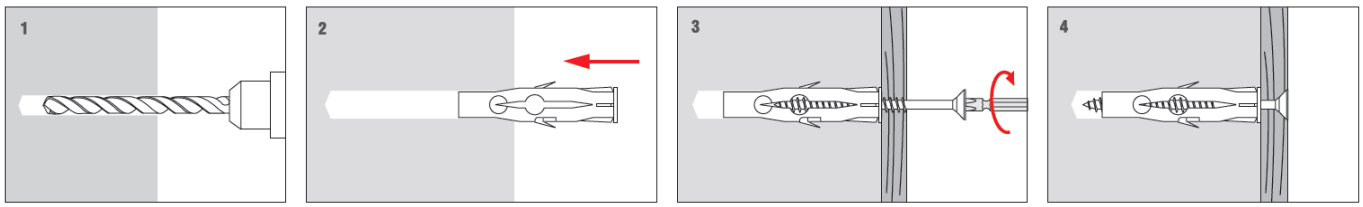

Section 3. TECHNICAL DATA

SELECTION TABLE					
Product code	Sleeve diameter and length	Recommended screw diameter	Min. anchorage depth	Min. depth of drilled hole	Number of pieces in a box
	d_k x L_k [mm]	d_w [mm]	h_{eff} [mm]	h_0 [mm]	[pcs]
KPU-06035	6x35	3-3,5	35	45	500
KPU-08050	8x50	4-5	50	60	300
KPU-10060	10x60	5-6	60	70	200

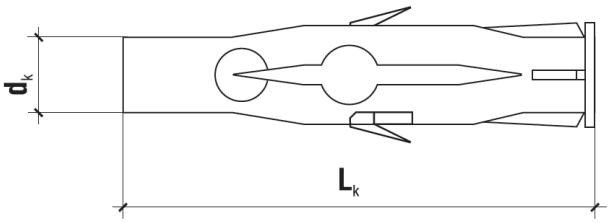

All rights reserved The sheet may be disclosed only in the form as delivered. No part (contents such as text, graphics, logos, figures, pictures, and any other data) given in this document may be modified or published whatsoever in part, without prior authorisation. Any trademarks, graphic symbols, trade names, logos and other data are protected by copyright and are property of their owner. Created: 2013-10-16 Updated: 2018-09-07

Section 4. REMARKS

1. All previous versions of this Product Data Sheet shall cease to be valid
2. Data given in this Product Data Sheet is in accordance with current knowledge and published in good faith. KLIMAS Sp. z o.o. is not responsible for correctness and quality of the fixing if recommendations regarding method of use and installation are not followed.

All rights reserved The sheet may be disclosed only in the form as delivered. No part (contents such as text, graphics, logos, figures, pictures, and any other data) given in this document may be modified or published whatsoever in part, without prior authorisation. Any trademarks, graphic symbols, trade names, logos and other data are protected by copyright and are property of their owner. Created: 2013-10-16 Updated: 2018-09-07