


Holder for C-profile rail 45




Holder 45 horizontal, required dowel holes at X



Holder 45 vertical, required dowel holes at X

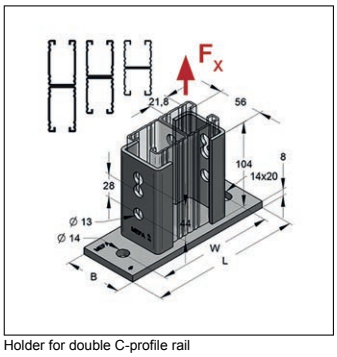

Holder for double C-profile rail

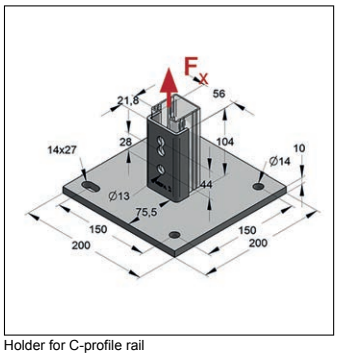

Holder for C-profile rail

TSP®

Specification

Application area:	For fixation of profile rails on construction.
Recommended accessories:	Threaded plates, hexagon screw
Type of attachment :	on the building structure, necessary dowel holes at X

Technical data

Material:	Steel

Remark: Load specifications refer to the component, not to the connection. For hot-dip galvanized parts, dimensional deviations up to 1 mm are possible.

Profile type	Alignment of plate	Dimension LxBxS [mm]	Hole distance W [mm]	max. profile height [mm]	Load F_X [kN]	TSP	Surface	Weight [kg/pc]	Packing unit [pcs.]	Part-No.
45/26 - 45/52	vertical / horizontal	100x100x6	88	52	15,0	no	galvanized	0,716	10	0812001
45/26 - 45/52	vertical / horizontal	100x100x6	88	52	15,0	yes	hot-dip galvanized	0,746	10	0812002
45/60 - 45/75	vertical	160x70x8	118	75	7,3	yes	hot-dip galvanized	1,01	10	08121802
45/90	vertical	186x70x8	144	90	13,7	yes	hot-dip galvanized	1,40	10	08120952
45/120	vertical	216x70x8	174	120	13,7	yes	hot-dip galvanized	1,54	5	08121002
45/150	vertical	246x70x8	204	150	13,5	yes	hot-dip galvanized	1,68	5	08121452
45/26 - 45/150	vertical / horizontal	200x200x10	150	150	10,0	yes	hot-dip galvanized	3,48	5	08197000